

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1058537

Luminaire Tested: S122RDRP-H865D840-X4F0-XX-UDD-BVL-S

Issue Date: 8/7/2025

Test Information

Test Method: LM-79-2024
Report Number: P1058537
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-60)
Test Lab: INNOVATION CENTER
Issue Date: 8/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S122RDRP-H865D840-X4F0-XX-UDD-BVL-S
Description: DEFINE 2 SILVER REGRESSED DIRECT RECESSED HOUSING WITH BLACK STRAIGHT BLADE
LOUVER WITH DIFFUSER
HIGH PERFORMANCE LIGHT ENGINE
Light Source: 4000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 696.1 lumens
Efficiency: N/A
Efficacy: 22.3 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.95 / 0.9
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 31.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1058537

CATALOG NUMBER: S122RDRP-H865D840-X4F0-XX-UDD-BVL-S

Luminous Intensity Polar Plot

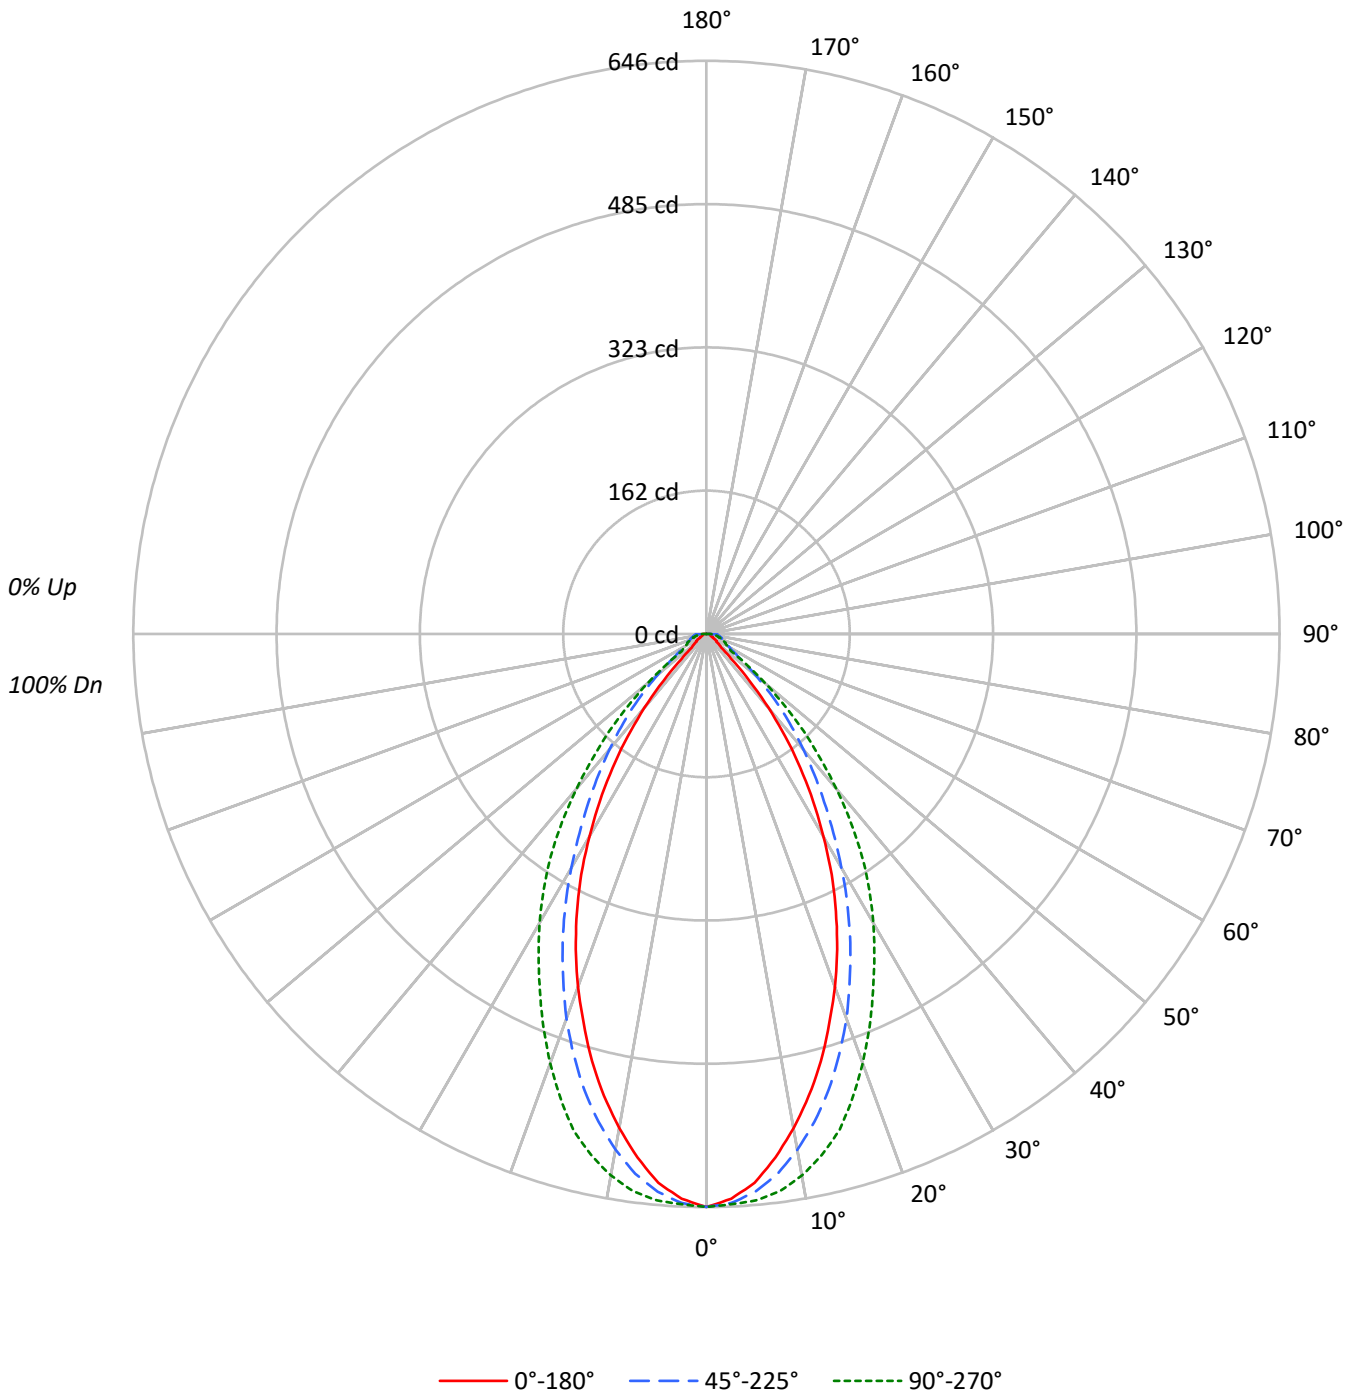



TEST NUMBER: P1058537

CATALOG NUMBER: S122RDRP-H865D840-X4F0-XX-UDD-BVL-S

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	112	108	105	102	109	106	103	101	102	100	97	98	96	95	95	93	92	90				90
2	105	99	94	90	102	97	92	89	94	90	87	91	87	85	88	85	83	81				81
3	98	91	85	80	96	89	84	79	86	82	78	84	80	77	82	78	75	74				74
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67				67
5	87	77	70	65	85	76	70	65	74	69	64	72	68	64	71	67	63	61				61
6	82	72	65	60	80	71	64	59	69	63	59	68	63	59	66	62	58	57				57
7	77	67	60	55	76	66	59	55	65	59	54	63	58	54	62	57	54	52				52
8	73	62	55	51	72	62	55	51	61	55	50	59	54	50	58	54	50	48				48
9	69	58	52	47	68	58	51	47	57	51	47	56	51	47	55	50	47	45				45
10	66	55	48	44	65	54	48	44	54	48	44	53	47	44	52	47	44	42				42

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11917	11917	11917
5°	11505	11688	11871
10°	10594	11057	11613
15°	9525	10163	11061
20°	8308	9062	10107
25°	7028	7808	9044
30°	5614	6486	8014
35°	4152	5213	6884
40°	2623	4083	5482
45°	1033	3066	4037
50°	534	2061	2486
55°	438	1354	1113
60°	321	1096	1004
65°	271	1026	1026
70°	264	1068	1003
75°	349	1233	1055
80°	521	1573	1180
85°	783	2625	1567

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°
 Vertical Angle: 87.5°
 Luminance: 5246 cd/sqm



TEST NUMBER: P1058537

CATALOG NUMBER: S122RDRP-H865D840-X4F0-XX-UDD-BVL-S

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	59.1	8.5
10°-20°	149.2	21.4
20°-30°	177.3	25.5
30°-40°	147.5	21.2
40°-50°	82.4	11.8
50°-60°	33.3	4.8
60°-70°	21.3	3.1
70°-80°	16.0	2.3
80°-90°	10.2	1.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	385.6	55.4
0°-40°	533.1	76.6
0°-60°	648.7	93.2
0°-90°	696.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	696.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	646	646	646	646	646	
5°	621	632	631	636	641	57
15°	499	513	532	559	579	139
25°	345	359	384	413	444	157
35°	184	202	231	270	306	114
45°	40	67	118	137	155	37
55°	14	28	42	41	35	12
65°	6	25	24	22	24	6
75°	5	17	17	16	15	5
85°	4	11	12	11	7	4
90°	0	0	0	0	0	

TEST NUMBER: P1058537

CATALOG NUMBER: S122RDRP-H865D840-X4F0-XX-UDD-BVL-S

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	645.8	645.8	645.8	645.8	645.8
2.5°	637.2	647.1	642.1	642.1	643.3
5°	621.1	632.2	631.0	635.9	640.9
7.5°	595.1	607.5	613.7	624.8	633.4
10°	565.4	579.0	590.1	607.5	619.8
12.5°	533.2	546.8	562.9	585.2	601.3
15°	498.6	513.4	532.0	559.2	579.0
17.5°	460.2	476.3	497.4	527.0	548.1
20°	423.1	439.2	461.5	491.2	514.7
22.5°	384.8	398.4	421.9	451.6	480.0
25°	345.2	358.8	383.5	413.2	444.2
27.5°	305.6	319.2	343.9	374.9	409.5
30°	263.5	278.4	304.4	339.0	376.1
32.5°	223.9	238.8	266.0	304.4	341.5
35°	184.3	201.7	231.4	269.7	305.6
37.5°	146.0	165.8	199.2	235.1	267.2
40°	108.9	129.9	169.5	200.4	227.6
42.5°	71.8	96.5	142.3	168.3	189.3
45°	39.6	66.8	117.5	137.3	154.7
47.5°	22.3	43.3	92.8	108.9	118.8
50°	18.6	32.2	71.8	82.9	86.6
52.5°	14.8	29.7	54.4	60.6	58.1
55°	13.6	28.5	42.1	40.8	34.6
57.5°	11.1	28.5	33.4	29.7	29.7
60°	8.7	27.2	29.7	26.0	27.2
62.5°	7.4	26.0	27.2	24.7	24.7
65°	6.2	24.7	23.5	22.3	23.5
67.5°	4.9	22.3	22.3	21.0	21.0
70°	4.9	21.0	19.8	18.6	18.6
72.5°	4.9	18.6	18.6	17.3	17.3
75°	4.9	17.3	17.3	16.1	14.8
77.5°	4.9	14.8	16.1	14.8	13.6
80°	4.9	13.6	14.8	13.6	11.1
82.5°	4.9	12.4	13.6	12.4	9.9
85°	3.7	11.1	12.4	11.1	7.4
87.5°	3.7	11.1	12.4	9.9	6.2
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1058537
 CATALOG NUMBER: S122RDRP-H865D840-X4F0-XX-UDD-BVL-S

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.98	8.20	7.35	8.51	8.83	8.05	9.27	8.42	9.58	9.90
	3H	8.31	9.39	8.69	9.72	10.09	10.08	11.16	10.46	11.50	11.86
	4H	8.88	9.89	9.28	10.24	10.63	11.03	12.04	11.44	12.39	12.78
	6H	9.44	10.37	9.85	10.74	11.13	11.98	12.91	12.39	13.28	13.67
	8H	9.76	10.64	10.19	11.03	11.44	12.43	13.31	12.86	13.70	14.10
	12H	10.07	10.91	10.50	11.29	11.72	12.85	13.69	13.28	14.07	14.50
4H	2H	7.94	8.95	8.35	9.30	9.69	8.73	9.74	9.13	10.09	10.47
	3H	9.97	10.80	10.38	11.20	11.61	11.01	11.84	11.42	12.25	12.65
	4H	11.04	11.79	11.48	12.21	12.66	12.16	12.91	12.59	13.33	13.77
	6H	11.91	12.56	12.37	13.00	13.47	13.32	13.97	13.79	14.42	14.89
	8H	12.32	12.92	12.79	13.37	13.84	13.89	14.49	14.36	14.94	15.41
	12H	12.70	13.23	13.18	13.72	14.19	14.43	14.96	14.92	15.45	15.92
8H	4H	11.81	12.42	12.28	12.87	13.34	12.71	13.31	13.18	13.76	14.23
	6H	13.15	13.65	13.65	14.14	14.63	14.16	14.66	14.66	15.15	15.64
	8H	13.87	14.31	14.39	14.83	15.32	14.92	15.37	15.45	15.89	16.38
	12H	14.56	14.95	15.07	15.45	16.02	15.71	16.10	16.23	16.60	17.17
12H	4H	11.97	12.50	12.46	12.99	13.46	12.82	13.35	13.30	13.83	14.31
	6H	13.47	13.92	14.00	14.43	14.93	14.39	14.83	14.91	15.35	15.84
	8H	14.38	14.77	14.89	15.26	15.84	15.29	15.69	15.81	16.18	16.76