

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1058538

Luminaire Tested: S122RDRP-H865D840-X4F0-XX-UDD-BVL-W

Issue Date: 8/7/2025

Test Information

Test Method: LM-79-2024
Report Number: P1058538
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-57)
Test Lab: INNOVATION CENTER
Issue Date: 8/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S122RDRP-H865D840-X4F0-XX-UDD-BVL-W
Description: DEFINE 2 WHITE REGRESSED DIRECT RECESSED HOUSING WITH BLACK STRAIGHT BLADE
LOUVER WITH DIFFUSER
HIGH PERFORMANCE LIGHT ENGINE
Light Source: 4000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 841.8 lumens
Efficiency: N/A
Efficacy: 27.0 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.96 / 0.91
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 31.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1058538

CATALOG NUMBER: S122RDRP-H865D840-X4F0-XX-UDD-BVL-W

Luminous Intensity Polar Plot

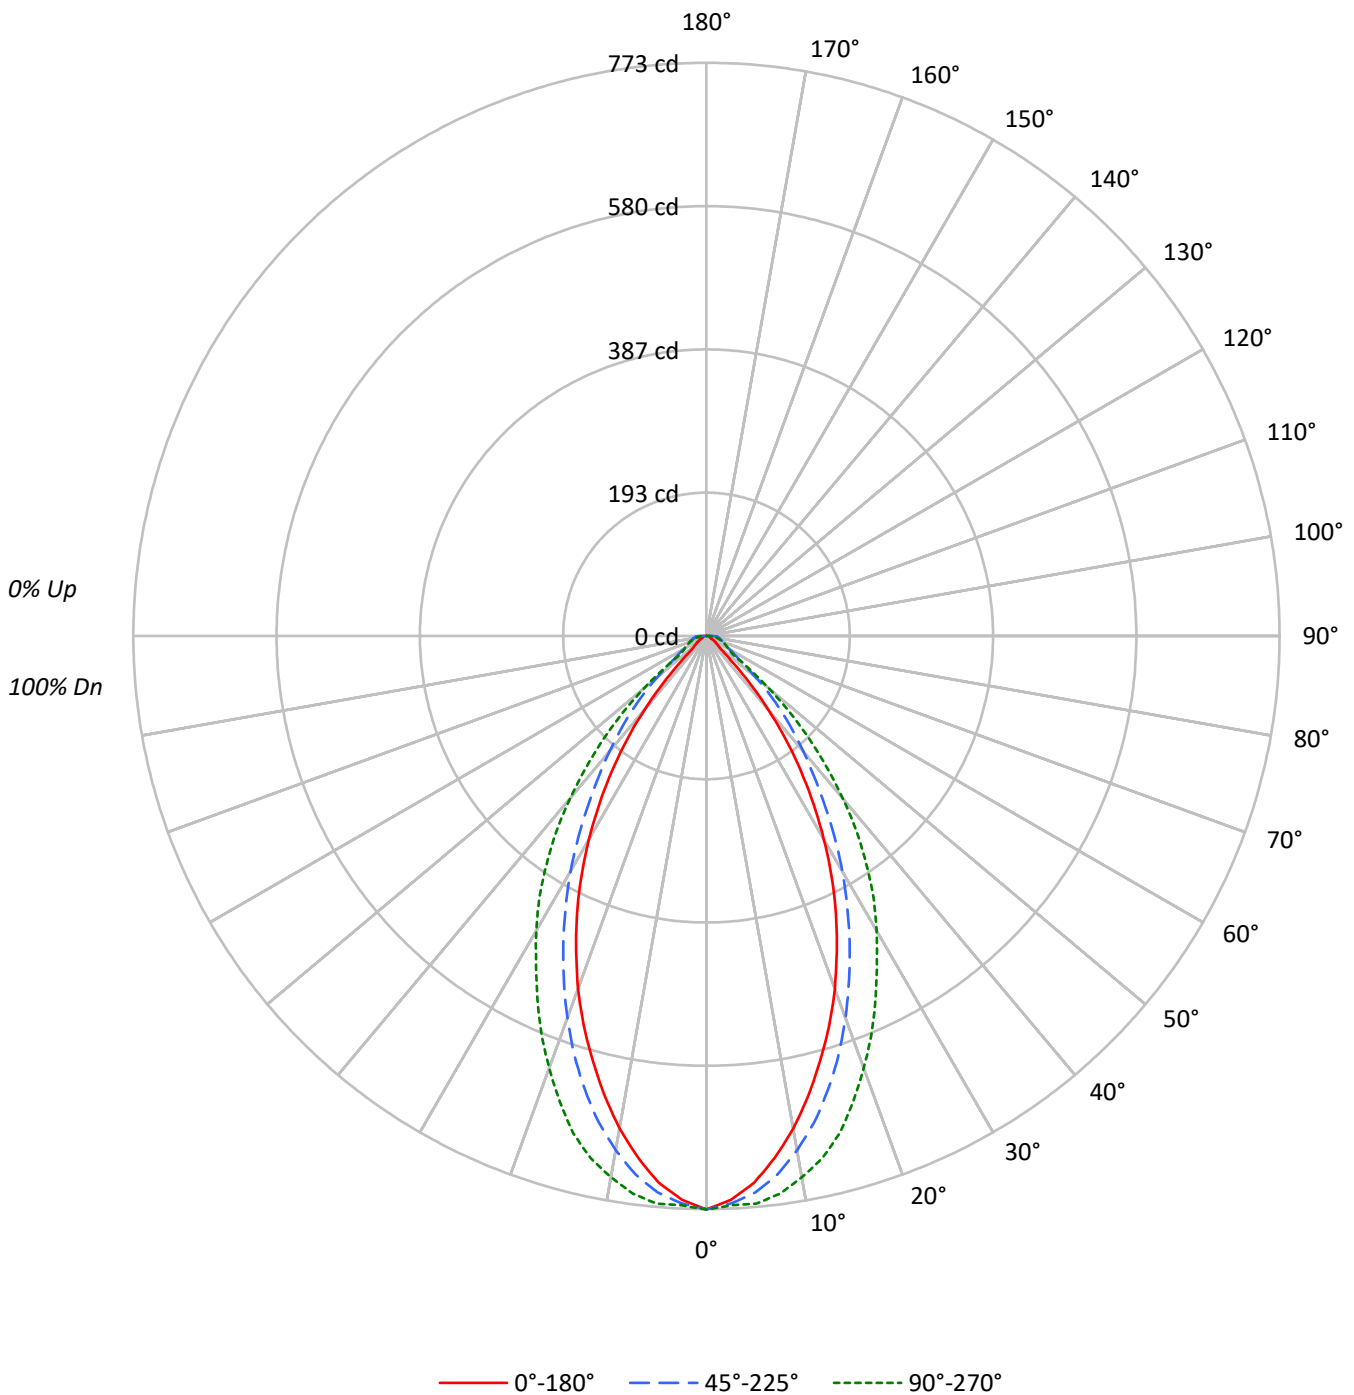



TEST NUMBER: P1058538

CATALOG NUMBER: S122RDRP-H865D840-X4F0-XX-UDD-BVL-W

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	112	108	105	102	109	106	103	101	102	100	97	98	96	95	95	93	92	90				90
2	105	99	94	90	102	97	92	89	94	90	87	91	87	85	88	85	83	81				81
3	98	91	85	80	96	89	84	79	86	82	78	84	80	76	81	78	75	74				74
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67				67
5	87	77	70	65	85	76	70	65	74	69	64	72	67	64	71	66	63	61				61
6	82	72	65	60	80	71	64	59	69	63	59	68	62	58	66	62	58	56				56
7	77	67	60	55	76	66	59	55	64	59	54	63	58	54	62	57	54	52				52
8	73	62	55	51	72	62	55	51	60	54	50	59	54	50	58	53	50	48				48
9	69	58	52	47	68	58	51	47	57	51	47	56	50	47	55	50	46	45				45
10	66	55	48	44	64	54	48	44	53	48	44	53	47	43	52	47	43	42				42

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	14271	14271	14271
5°	13707	13959	14235
10°	12636	13193	13888
15°	11323	12104	13262
20°	9938	10765	12175
25°	8415	9296	10984
30°	6750	7805	9782
35°	4990	6244	8474
40°	3129	4887	6887
45°	1226	3682	5102
50°	603	2486	3126
55°	476	1631	1393
60°	365	1325	1277
65°	271	1244	1244
70°	334	1268	1268
75°	349	1412	1326
80°	521	1838	1445
85°	1037	3133	2096

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 87.5°
 Luminance: 5753 cd/sqm



TEST NUMBER: P1058538

CATALOG NUMBER: S122RDRP-H865D840-X4F0-XX-UDD-BVL-W

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	70.6	8.4
10°-20°	178.6	21.2
20°-30°	213.6	25.4
30°-40°	179.8	21.4
40°-50°	102.4	12.2
50°-60°	40.4	4.8
60°-70°	25.4	3.0
70°-80°	18.9	2.2
80°-90°	12.0	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	462.9	55.0
0°-40°	642.7	76.3
0°-60°	785.4	93.3
0°-90°	841.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	841.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	773	773	773	773	773	
5°	740	756	754	762	768	69
15°	593	614	634	671	694	165
25°	413	432	457	504	540	188
35°	222	241	277	337	376	137
45°	47	83	141	177	196	44
55°	15	32	51	52	43	13
65°	6	28	28	27	28	7
75°	5	20	20	19	19	5
85°	5	14	15	14	10	4
90°	0	0	0	0	0	



TEST NUMBER: P1058538

CATALOG NUMBER: S122RDRP-H865D840-X4F0-XX-UDD-BVL-W

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	773.4	773.4	773.4	773.4	773.4
2.5°	761.0	774.7	766.0	767.2	768.5
5°	740.0	756.1	753.6	762.3	768.5
7.5°	709.1	726.4	732.6	747.4	758.6
10°	674.4	694.2	704.1	727.6	741.2
12.5°	634.8	657.1	671.9	701.6	721.4
15°	592.7	613.8	633.6	670.7	694.2
17.5°	550.7	571.7	592.7	633.6	658.3
20°	506.1	525.9	548.2	591.5	620.0
22.5°	459.1	480.1	502.4	547.0	581.6
25°	413.3	431.9	456.6	503.6	539.5
27.5°	365.1	383.6	410.8	459.1	497.5
30°	316.8	335.4	366.3	415.8	459.1
32.5°	268.5	288.3	321.7	376.2	419.5
35°	221.5	241.3	277.2	336.6	376.2
37.5°	175.7	198.0	237.6	295.8	332.9
40°	129.9	155.9	202.9	254.9	285.9
42.5°	86.6	118.8	170.8	214.1	240.1
45°	47.0	82.9	141.1	177.0	195.5
47.5°	26.0	53.2	112.6	141.1	152.2
50°	21.0	37.1	86.6	107.7	108.9
52.5°	17.3	33.4	64.3	76.7	70.5
55°	14.8	32.2	50.7	52.0	43.3
57.5°	12.4	30.9	42.1	37.1	37.1
60°	9.9	30.9	35.9	33.4	34.6
62.5°	7.4	30.9	32.2	29.7	30.9
65°	6.2	28.5	28.5	27.2	28.5
67.5°	6.2	26.0	26.0	24.7	26.0
70°	6.2	24.7	23.5	23.5	23.5
72.5°	4.9	22.3	22.3	21.0	21.0
75°	4.9	19.8	19.8	18.6	18.6
77.5°	4.9	18.6	18.6	17.3	16.1
80°	4.9	16.1	17.3	16.1	13.6
82.5°	4.9	14.8	16.1	14.8	11.1
85°	4.9	13.6	14.8	13.6	9.9
87.5°	3.7	13.6	13.6	11.1	7.4
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1058538
 CATALOG NUMBER: S122RDRP-H865D840-X4F0-XX-UDD-BVL-W

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.92	8.14	7.29	8.45	8.77	8.95	10.17	9.31	10.48	10.80
	3H	8.47	9.55	8.85	9.88	10.25	10.92	12.01	11.30	12.34	12.70
	4H	9.02	10.03	9.42	10.38	10.77	11.84	12.85	12.24	13.20	13.59
	6H	9.57	10.50	9.99	10.88	11.27	12.72	13.65	13.14	14.02	14.42
	8H	9.86	10.74	10.30	11.14	11.54	13.12	14.00	13.55	14.39	14.80
	12H	10.22	11.06	10.65	11.44	11.88	13.56	14.41	14.00	14.79	15.22
4H	2H	8.11	9.12	8.52	9.48	9.86	9.57	10.58	9.97	10.93	11.32
	3H	10.31	11.15	10.73	11.55	11.96	11.81	12.65	12.23	13.05	13.46
	4H	11.36	12.11	11.80	12.53	12.98	12.89	13.64	13.32	14.06	14.50
	6H	12.26	12.91	12.72	13.35	13.82	14.00	14.65	14.46	15.09	15.56
	8H	12.64	13.25	13.11	13.70	14.17	14.52	15.12	14.99	15.57	16.04
	12H	13.06	13.59	13.55	14.08	14.55	15.09	15.63	15.58	16.11	16.59
8H	4H	12.17	12.77	12.64	13.22	13.69	13.38	13.99	13.85	14.43	14.91
	6H	13.55	14.05	14.05	14.54	15.03	14.78	15.27	15.28	15.77	16.25
	8H	14.26	14.71	14.79	15.23	15.72	15.51	15.96	16.04	16.48	16.97
	12H	15.01	15.40	15.53	15.90	16.47	16.34	16.74	16.86	17.23	17.81
12H	4H	12.33	12.87	12.82	13.35	13.82	13.48	14.02	13.97	14.50	14.97
	6H	13.88	14.33	14.40	14.84	15.34	14.99	15.44	15.52	15.96	16.45
	8H	14.79	15.19	15.31	15.68	16.25	15.88	16.27	16.39	16.77	17.34