

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1057888

Luminaire Tested: S122RDRP-S290D840-X4F0-XX-UDD-BVL-B

Issue Date: 8/7/2025

Test Information

Test Method: LM-79-2024
Report Number: P1057888
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2406-143-21)
Test Lab: INNOVATION CENTER
Issue Date: 8/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S122RDRP-S290D840-X4F0-XX-UDD-BVL-B
Description: DEFINE 2 BLACK REGRESSED DIRECT RECESSED HOUSING WITH BLACK STRAIGHT BLADE LOUVER WITH DIFFUSER
CORE LIGHT ENGINE
Light Source: 4000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 191.5 lumens
Efficiency: N/A
Efficacy: 15.3 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.8 / 0.88
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 12.5
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1057888

CATALOG NUMBER: S122RDRP-S290D840-X4F0-XX-UDD-BVL-B

Luminous Intensity Polar Plot

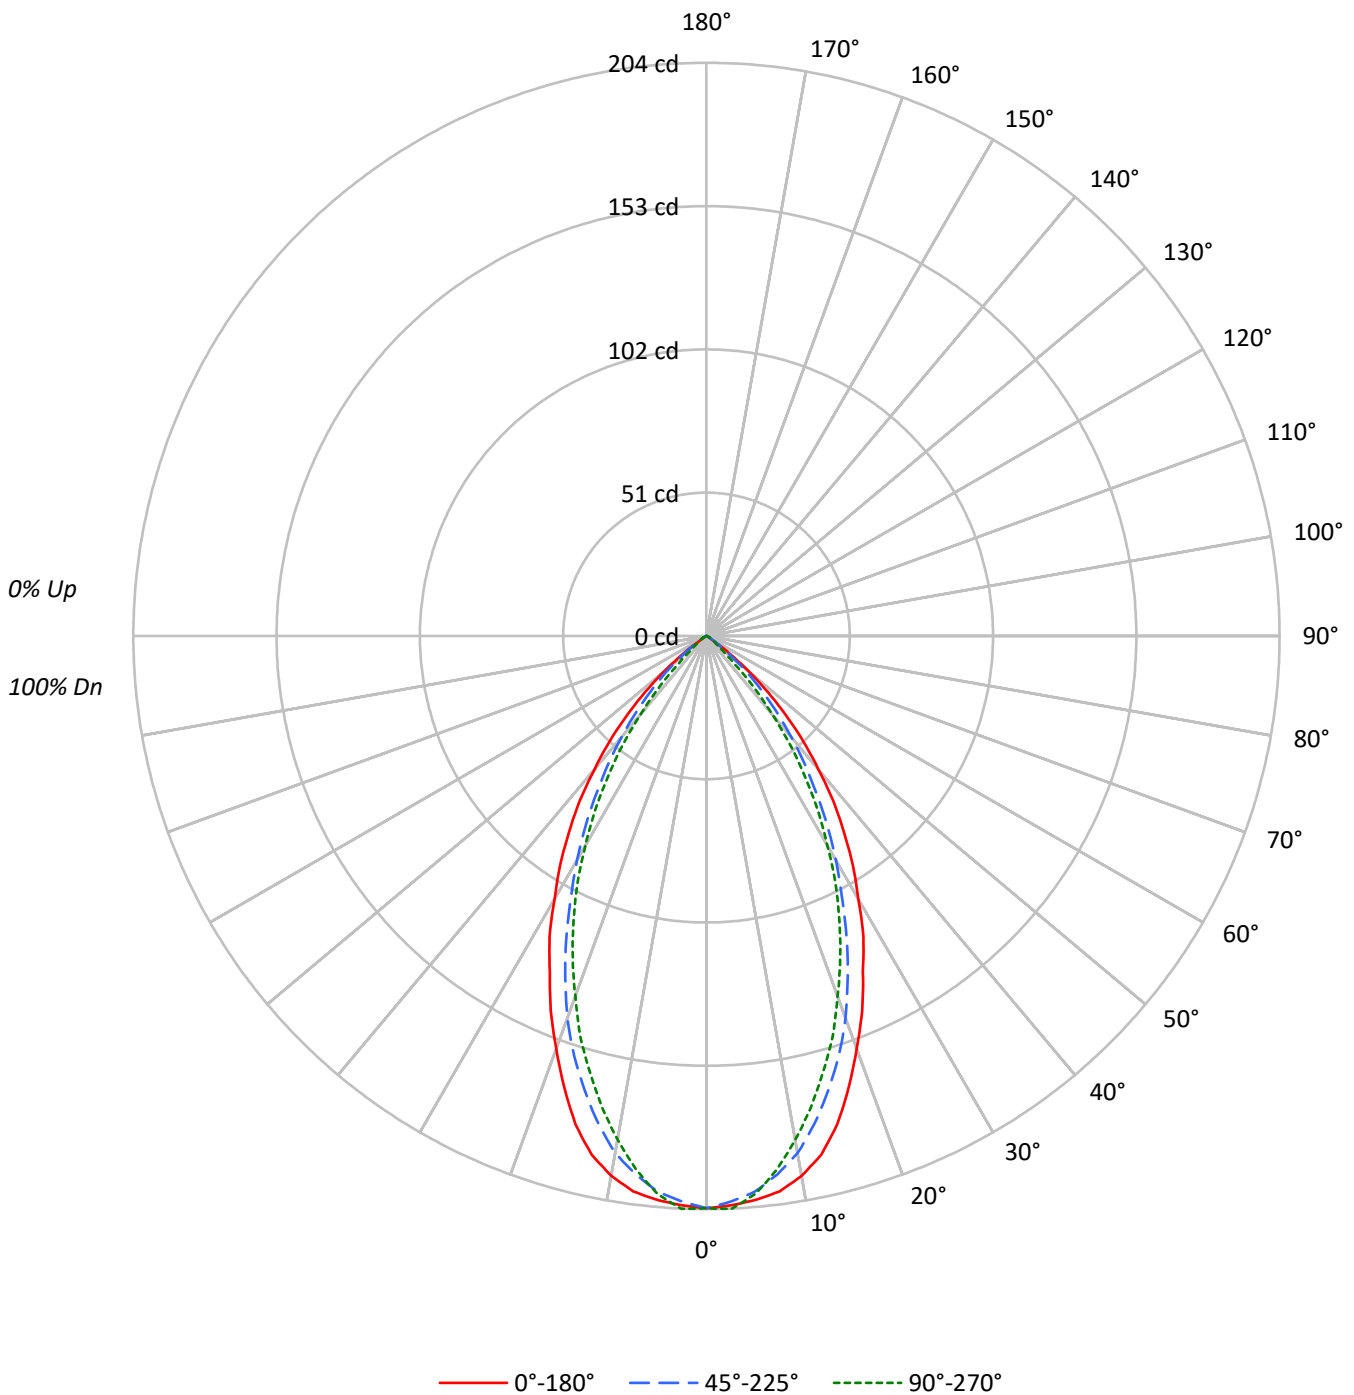



TEST NUMBER: P1057888

CATALOG NUMBER: S122RDRP-S290D840-X4F0-XX-UDD-BVL-B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	87	86
3	101	95	90	85	99	93	89	85	91	87	83	88	85	82	86	83	81	79
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	75	73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67
6	86	76	70	66	84	76	70	65	74	69	65	73	68	64	71	67	64	62
7	81	71	65	61	80	71	65	61	69	64	60	68	63	60	67	63	60	58
8	77	67	61	56	76	66	60	56	65	60	56	64	59	56	63	59	56	54
9	73	63	57	53	72	62	57	52	61	56	52	61	56	52	60	55	52	51
10	69	59	53	49	68	59	53	49	58	53	49	57	52	49	56	52	49	47

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3759	3759	3759
5°	3732	3677	3693
10°	3656	3502	3412
15°	3439	3200	3068
20°	3069	2841	2680
25°	2683	2402	2280
30°	2303	1962	1835
35°	1921	1532	1376
40°	1493	1130	882
45°	1044	752	381
50°	568	396	135
55°	84	138	97
60°	15	33	63
65°	0	17	39
70°	0	0	22
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1044 cd/sqm



TEST NUMBER: P1057888

CATALOG NUMBER: S122RDRP-S290D840-X4F0-XX-UDD-BVL-B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	18.7	9.8
10°-20°	47.2	24.6
20°-30°	55.0	28.7
30°-40°	44.1	23.0
40°-50°	21.9	11.4
50°-60°	4.3	2.3
60°-70°	0.4	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	120.8	63.1
0°-40°	164.9	86.1
0°-60°	191.1	99.8
0°-90°	191.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	191.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	204	204	204	204	204	
5°	202	202	198	199	199	19
15°	180	176	168	163	161	50
25°	132	125	118	115	112	61
35°	85	77	68	65	61	53
45°	40	35	29	19	15	31
55°	3	5	4	3	3	5
65°	0	0	0	0	1	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P1057888

CATALOG NUMBER: S122RDRP-S290D840-X4F0-XX-UDD-BVL-B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	203.7	203.7	203.7	203.7	203.7
2.5°	202.8	203.7	201.5	203.7	204.1
5°	201.5	201.5	198.5	198.9	199.4
7.5°	199.4	198.5	193.3	192.5	191.6
10°	195.1	193.3	186.9	183.4	182.1
12.5°	189.0	186.4	177.8	174.0	171.8
15°	180.0	176.5	167.5	163.2	160.6
17.5°	168.4	165.3	156.7	152.0	149.4
20°	156.3	152.0	144.7	139.9	136.5
22.5°	144.7	139.1	131.3	127.9	124.4
25°	131.8	125.3	118.0	115.4	112.0
27.5°	121.0	112.8	104.2	102.5	99.5
30°	108.1	100.3	92.1	89.6	86.1
32.5°	96.9	88.3	80.1	77.1	74.1
35°	85.3	76.6	68.0	65.0	61.1
37.5°	74.1	65.9	57.3	52.5	49.1
40°	62.0	55.1	46.9	40.9	36.6
42.5°	51.2	45.2	37.5	29.7	25.4
45°	40.0	35.3	28.8	19.4	14.6
47.5°	29.7	26.3	21.1	11.2	7.8
50°	19.8	18.5	13.8	5.6	4.7
52.5°	10.8	11.6	8.2	3.4	3.9
55°	2.6	5.2	4.3	2.6	3.0
57.5°	0.4	0.9	2.2	2.2	2.2
60°	0.4	0.4	0.9	1.3	1.7
62.5°	0.4	0.0	0.4	0.9	1.3
65°	0.0	0.0	0.4	0.4	0.9
67.5°	0.0	0.0	0.0	0.4	0.4
70°	0.0	0.0	0.0	0.4	0.4
72.5°	0.0	0.0	0.0	0.0	0.4
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1057888
 CATALOG NUMBER: S122RDRP-S290D840-X4F0-XX-UDD-BVL-B

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4H	2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00