

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1058346

Luminaire Tested: S122RDRP-H290D940-X4F0-XX-UDD-WVL-W

Issue Date: 8/7/2025

Test Information

Test Method: LM-79-2024
Report Number: P1058346
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-55)
Test Lab: INNOVATION CENTER
Issue Date: 8/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S122RDRP-H290D940-X4F0-XX-UDD-WVL-W
Description: DEFINE 2 WHITE REGRESSED DIRECT RECESSED HOUSING WITH WHITE STRAIGHT BLADE
LOUVER WITH DIFFUSER
HIGH PERFORMANCE LIGHT ENGINE
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 575.5 lumens
Efficiency: N/A
Efficacy: 49.2 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 1.05 / 1.05
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 11.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1058346

CATALOG NUMBER: S122RDRP-H290D940-X4F0-XX-UDD-WVL-W

Luminous Intensity Polar Plot

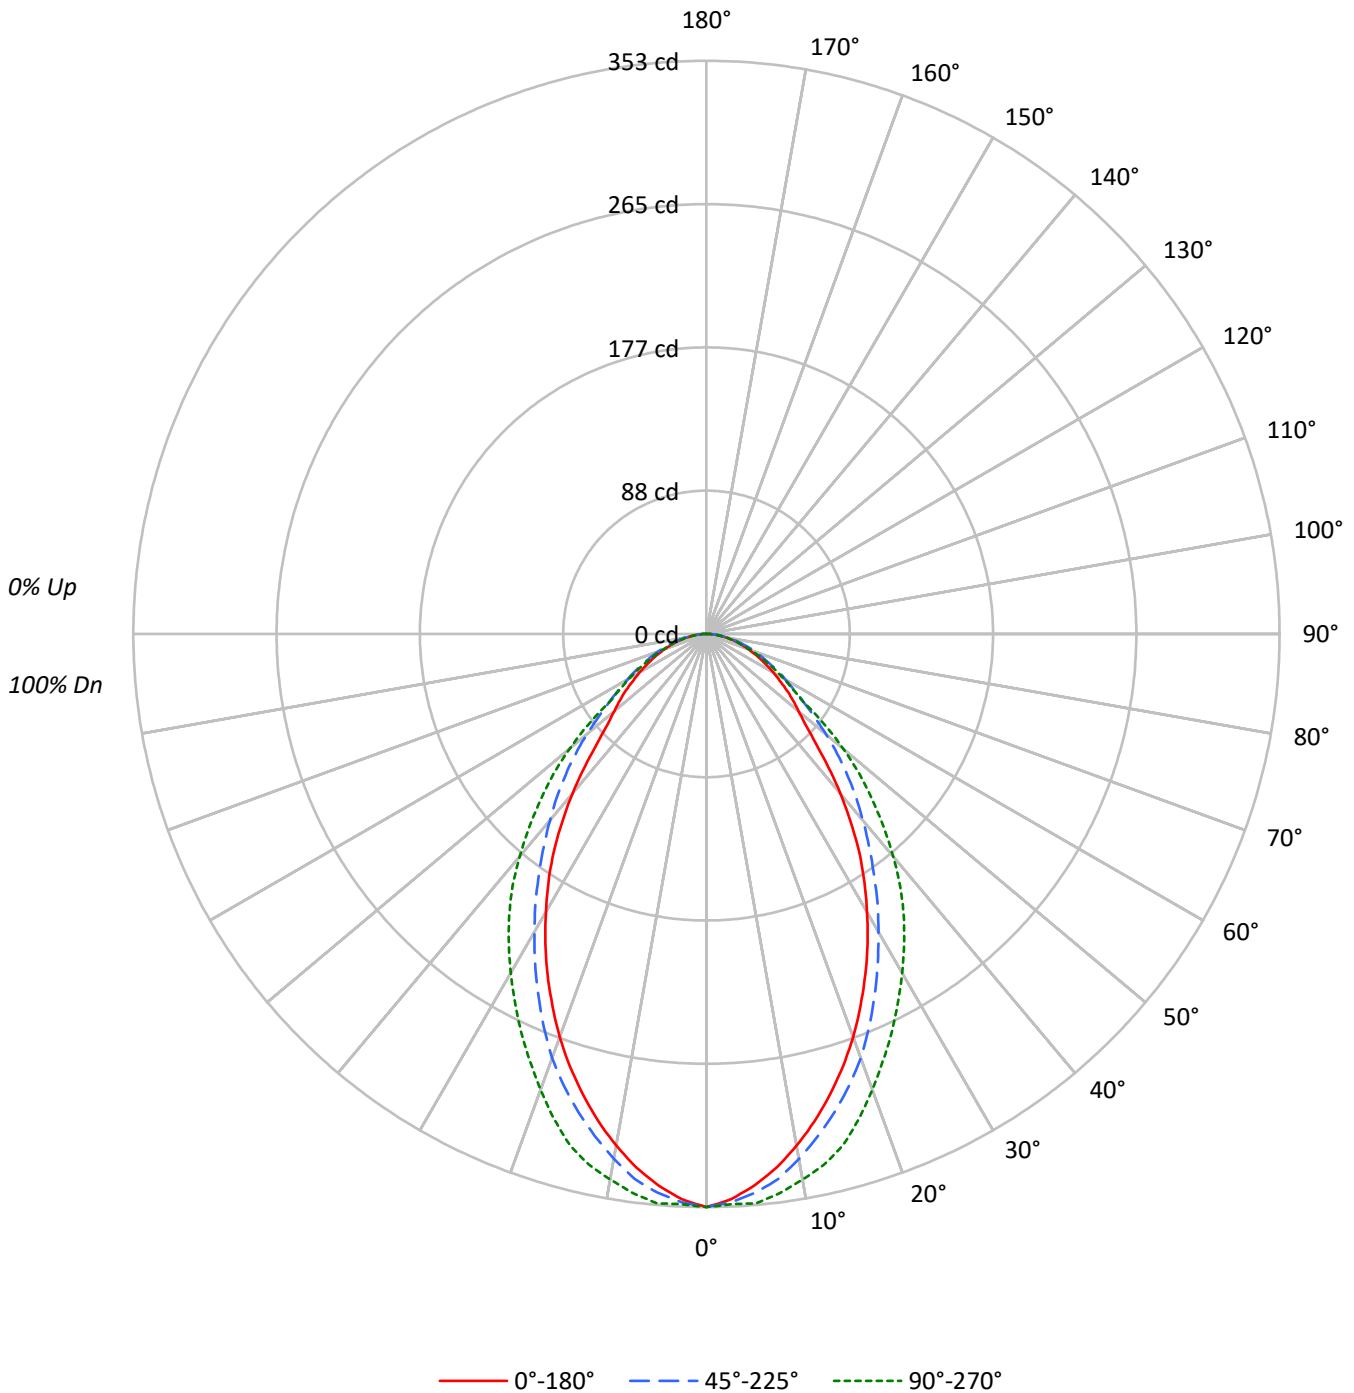



TEST NUMBER: P1058346

CATALOG NUMBER: S122RDRP-H290D940-X4F0-XX-UDD-WVL-W

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	106	103	100	108	104	101	98	100	97	95	96	94	92	93	91	89	87
2	102	95	89	84	100	93	88	83	90	85	81	87	83	80	84	81	78	76
3	94	85	78	73	92	84	77	72	81	75	71	78	74	70	76	72	68	67
4	88	77	69	64	85	76	69	63	73	67	62	71	66	62	69	65	61	59
5	81	70	62	56	80	69	62	56	67	60	55	65	59	55	63	58	54	52
6	76	64	56	50	74	63	56	50	61	55	50	60	54	49	58	53	49	47
7	71	59	51	46	69	58	51	45	57	50	45	55	49	45	54	49	44	43
8	67	54	47	41	65	54	46	41	52	46	41	51	45	41	50	45	41	39
9	63	50	43	38	61	50	43	38	49	42	38	48	42	37	47	41	37	36
10	59	47	40	35	58	46	40	35	46	39	35	45	39	35	44	38	34	33

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6514	6514	6514
5°	6314	6398	6518
10°	5996	6151	6393
15°	5613	5823	6222
20°	5188	5457	5865
25°	4713	4992	5503
30°	4215	4513	5135
35°	3694	4043	4771
40°	3090	3611	4307
45°	2476	3199	3763
50°	2124	2756	3161
55°	1943	2345	2332
60°	1764	2074	2030
65°	1607	1856	1773
70°	1473	1699	1575
75°	1383	1568	1383
80°	1286	1456	1211
85°	1291	1524	1037

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 3763 cd/sqm



TEST NUMBER: P1058346

CATALOG NUMBER: S122RDRP-H290D940-X4F0-XX-UDD-WVL-W

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	32.6	5.7
10°-20°	86.3	15.0
20°-30°	113.8	19.8
30°-40°	114.6	19.9
40°-50°	93.3	16.2
50°-60°	63.6	11.1
60°-70°	41.3	7.2
70°-80°	22.7	3.9
80°-90°	7.4	1.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	232.7	40.4
0°-40°	347.2	60.3
0°-60°	504.1	87.6
0°-90°	575.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	575.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	353	353	353	353	353	
5°	341	347	345	348	352	32
15°	294	301	305	317	326	82
25°	232	239	245	256	270	106
35°	164	172	180	195	212	102
45°	95	107	123	133	144	75
55°	60	66	73	73	72	54
65°	37	44	42	40	41	37
75°	19	24	22	20	19	21
85°	6	8	7	6	5	7
90°	0	0	0	0	0	



TEST NUMBER: P1058346

CATALOG NUMBER: S122RDRP-H290D940-X4F0-XX-UDD-WVL-W

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	353.0	353.0	353.0	353.0	353.0
2.5°	348.5	354.1	350.4	350.7	351.5
5°	340.9	347.3	345.4	348.5	351.9
7.5°	331.4	337.8	338.6	343.1	347.3
10°	320.0	327.2	328.3	335.2	341.2
12.5°	307.5	315.4	316.9	326.8	334.8
15°	293.8	301.4	304.8	317.3	325.7
17.5°	279.4	286.6	291.9	303.3	312.8
20°	264.2	271.0	277.9	288.1	298.7
22.5°	247.9	255.5	261.9	272.2	284.3
25°	231.5	239.1	245.2	256.2	270.3
27.5°	214.8	222.4	228.5	240.3	255.5
30°	197.8	205.7	211.8	225.1	241.0
32.5°	181.1	189.0	195.9	209.9	226.6
35°	164.0	172.3	179.5	195.1	211.8
37.5°	145.8	155.2	164.4	179.9	196.2
40°	128.3	138.9	149.9	164.4	178.8
42.5°	110.8	122.6	136.3	148.4	161.7
45°	94.9	106.7	122.6	133.2	144.2
47.5°	82.4	92.2	109.3	118.0	127.9
50°	74.0	80.9	96.0	102.9	110.1
52.5°	67.2	72.9	83.5	88.1	91.9
55°	60.4	66.4	72.9	73.3	72.5
57.5°	53.5	60.4	63.8	61.1	62.6
60°	47.8	54.7	56.2	53.5	55.0
62.5°	41.8	49.3	49.3	46.7	47.4
65°	36.8	43.7	42.5	40.2	40.6
67.5°	31.9	38.7	36.8	34.5	34.5
70°	27.3	33.8	31.5	29.2	29.2
72.5°	23.2	28.5	27.0	24.3	23.9
75°	19.4	23.9	22.0	19.7	19.4
77.5°	15.6	19.4	17.8	15.9	15.2
80°	12.1	15.6	13.7	12.1	11.4
82.5°	9.1	11.8	10.2	8.7	8.0
85°	6.1	8.0	7.2	5.7	4.9
87.5°	3.0	5.3	4.6	3.8	3.0
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1058346

CATALOG NUMBER: S122RDRP-H290D940-X4F0-XX-UDD-WVL-W

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.23	14.67	13.60	14.99	15.30	13.48	14.91	13.84	15.23	15.54
	3H	14.76	16.05	15.14	16.38	16.74	14.83	16.12	15.21	16.45	16.81
	4H	15.32	16.53	15.72	16.88	17.26	15.31	16.52	15.71	16.87	17.25
	6H	15.75	16.86	16.16	17.23	17.62	15.66	16.77	16.07	17.14	17.53
	8H	15.90	16.96	16.33	17.35	17.75	15.77	16.83	16.20	17.22	17.62
	12H	16.01	17.02	16.44	17.41	17.84	15.84	16.85	16.27	17.23	17.66
4H	2H	13.80	15.01	14.21	15.36	15.74	14.00	15.20	14.40	15.55	15.93
	3H	15.61	16.61	16.02	17.01	17.41	15.57	16.57	15.98	16.97	17.37
	4H	16.35	17.25	16.78	17.66	18.10	16.17	17.06	16.60	17.48	17.92
	6H	16.94	17.72	17.40	18.16	18.62	16.63	17.41	17.09	17.86	18.32
	8H	17.15	17.88	17.61	18.32	18.79	16.78	17.51	17.25	17.96	18.43
	12H	17.31	17.96	17.80	18.44	18.91	16.89	17.54	17.38	18.02	18.49
8H	4H	16.61	17.34	17.08	17.79	18.26	16.46	17.19	16.92	17.63	18.10
	6H	17.37	17.97	17.87	18.47	18.94	17.05	17.65	17.54	18.14	18.62
	8H	17.70	18.24	18.21	18.75	19.24	17.27	17.81	17.78	18.32	18.81
	12H	17.98	18.46	18.49	18.95	19.52	17.45	17.93	17.96	18.42	18.99
12H	4H	16.63	17.28	17.11	17.76	18.23	16.49	17.14	16.97	17.62	18.09
	6H	17.42	17.96	17.93	18.47	18.96	17.11	17.65	17.63	18.17	18.66
	8H	17.81	18.29	18.33	18.78	19.35	17.40	17.88	17.91	18.37	18.94