

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1058389

Luminaire Tested: S122RDRP-H485D850-X4F0-XX-UDD-WVL-B

Issue Date: 8/7/2025

Test Information

Test Method: LM-79-2024
Report Number: P1058389
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2406-143-19)
Test Lab: INNOVATION CENTER
Issue Date: 8/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S122RDRP-H485D850-X4F0-XX-UDD-WVL-B
Description: DEFINE 2 BLACK REGRESSED DIRECT RECESSED HOUSING WITH WHITE STRAIGHT BLADE LOUVER WITH DIFFUSER
HIGH PERFORMANCE LIGHT ENGINE
Light Source: 5000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 716.5 lumens
Efficiency: N/A
Efficacy: 41.2 lumens/watt
Spacing Criteria (0/90/45): 1 / 0.92 / 1.02
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 17.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1058389

CATALOG NUMBER: S122RDRP-H485D850-X4F0-XX-UDD-WVL-B

Luminous Intensity Polar Plot

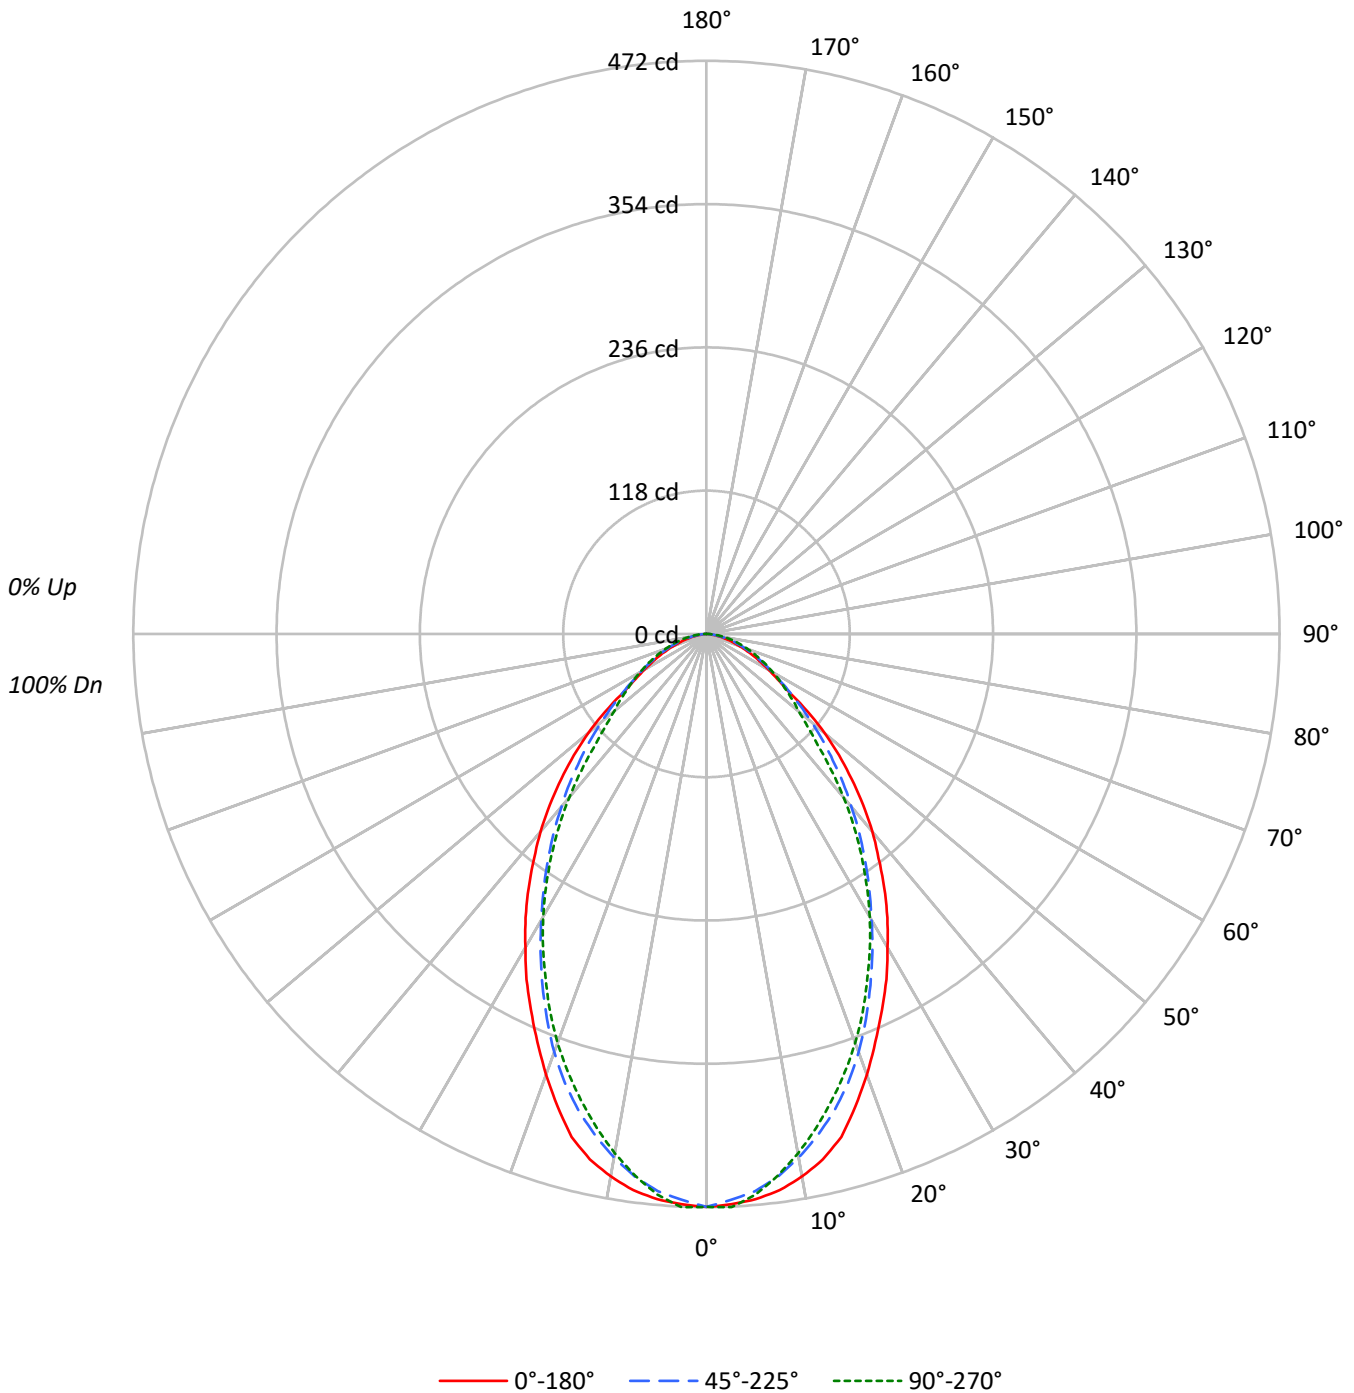

TEST NUMBER: P1058389

CATALOG NUMBER: S122RDRP-H485D850-X4F0-XX-UDD-WVL-B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88					88			
2	103	96	91	86	100	94	89	85	91	87	83	88	84	81	85	82	79	77					77			
3	95	87	80	74	93	85	79	74	82	77	73	80	75	71	77	73	70	68					68			
4	89	79	71	65	87	77	70	65	75	69	64	73	68	63	71	66	63	61					61			
5	83	72	64	58	81	71	63	58	69	62	57	67	61	57	65	60	56	54					54			
6	77	66	58	52	75	65	57	52	63	56	52	61	56	51	60	55	51	49					49			
7	72	60	53	47	71	60	52	47	58	52	47	57	51	47	56	50	46	44					44			
8	68	56	48	43	66	55	48	43	54	47	43	53	47	43	52	46	42	41					41			
9	64	52	45	40	63	51	44	39	50	44	39	49	43	39	48	43	39	37					37			
10	60	48	41	36	59	48	41	36	47	41	36	46	40	36	45	40	36	34					34			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8706	8706	8706
5°	8654	8530	8585
10°	8501	8205	8136
15°	8193	7764	7605
20°	7582	7199	7036
25°	6959	6501	6377
30°	6354	5793	5729
35°	5753	5127	5010
40°	5121	4468	4235
45°	4410	3841	3392
50°	3646	3235	2848
55°	2635	2683	2561
60°	2188	2299	2329
65°	1869	2000	2131
70°	1538	1786	1948
75°	1283	1497	1768
80°	956	1201	1594
85°	318	635	1440

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 4410 cd/sqm



TEST NUMBER: P1058389

CATALOG NUMBER: S122RDRP-H485D850-X4F0-XX-UDD-WVL-B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	43.6	6.1
10°-20°	114.8	16.0
20°-30°	148.6	20.7
30°-40°	145.8	20.3
40°-50°	114.8	16.0
50°-60°	75.2	10.5
60°-70°	45.8	6.4
70°-80°	22.9	3.2
80°-90°	4.9	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	307.1	42.9
0°-40°	452.8	63.2
0°-60°	642.8	89.7
0°-90°	716.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	716.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	472	472	472	472	472	
5°	467	467	460	464	464	44
15°	429	423	406	401	398	119
25°	342	330	319	318	313	157
35°	255	241	228	227	222	159
45°	169	158	147	137	130	130
55°	82	86	83	80	80	78
65°	43	44	46	48	49	43
75°	18	19	21	24	25	19
85°	2	2	3	5	7	3
90°	0	0	0	0	0	



TEST NUMBER: P1058389

CATALOG NUMBER: S122RDRP-H485D850-X4F0-XX-UDD-WVL-B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	471.8	471.8	471.8	471.8	471.8
2.5°	470.2	471.0	466.5	471.0	472.5
5°	467.2	467.2	460.5	463.5	463.5
7.5°	462.0	461.2	450.7	450.7	450.0
10°	453.7	450.7	437.9	435.7	434.2
12.5°	443.2	437.9	422.9	419.2	416.9
15°	428.9	422.9	406.4	401.1	398.1
17.5°	407.9	401.9	387.6	381.6	378.6
20°	386.1	377.1	366.6	361.3	358.3
22.5°	363.6	353.1	343.3	339.5	336.5
25°	341.8	330.5	319.3	317.8	313.2
27.5°	320.8	307.2	296.0	295.2	291.5
30°	298.2	284.0	271.9	272.7	268.9
32.5°	277.2	263.7	249.4	250.1	245.6
35°	255.4	241.1	227.6	226.9	222.4
37.5°	232.9	219.3	206.6	203.6	199.1
40°	212.6	199.1	185.5	180.3	175.8
42.5°	190.8	178.8	166.8	158.5	152.5
45°	169.0	158.5	147.2	136.7	130.0
47.5°	148.0	139.7	130.0	117.2	112.7
50°	127.0	120.9	112.7	101.4	99.2
52.5°	105.2	102.9	97.7	90.1	89.4
55°	81.9	86.4	83.4	80.4	79.6
57.5°	69.1	69.9	72.1	71.4	71.4
60°	59.3	59.3	62.3	63.1	63.1
62.5°	50.3	51.1	54.1	55.6	55.6
65°	42.8	43.6	45.8	48.1	48.8
67.5°	35.3	36.8	39.1	41.3	42.1
70°	28.5	30.0	33.1	35.3	36.1
72.5°	23.3	24.0	27.0	29.3	30.0
75°	18.0	18.8	21.0	24.0	24.8
77.5°	12.8	14.3	16.5	18.8	20.3
80°	9.0	9.8	11.3	14.3	15.0
82.5°	5.3	6.0	7.5	9.8	10.5
85°	1.5	2.3	3.0	5.3	6.8
87.5°	0.0	0.0	0.0	1.5	3.0
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1058389
 CATALOG NUMBER: S122RDRP-H485D850-X4F0-XX-UDD-WVL-B

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.64	15.04	14.01	15.35	15.67	13.82	15.22	14.19	15.53	15.85
	3H	14.77	16.02	15.15	16.35	16.71	15.28	16.53	15.66	16.86	17.22
	4H	15.12	16.29	15.53	16.64	17.02	15.82	16.99	16.22	17.34	17.72
	6H	15.31	16.38	15.72	16.75	17.14	16.24	17.31	16.65	17.68	18.07
	8H	15.34	16.35	15.77	16.74	17.15	16.36	17.38	16.79	17.77	18.17
	12H	15.32	16.29	15.75	16.68	17.11	16.45	17.42	16.88	17.80	18.23
4H	2H	14.10	15.26	14.50	15.61	15.99	14.25	15.41	14.65	15.76	16.14
	3H	15.44	16.40	15.85	16.80	17.20	15.92	16.88	16.33	17.28	17.68
	4H	15.88	16.74	16.32	17.16	17.60	16.58	17.44	17.02	17.86	18.30
	6H	16.15	16.90	16.61	17.34	17.81	17.12	17.86	17.58	18.31	18.77
	8H	16.20	16.89	16.67	17.34	17.81	17.29	17.98	17.75	18.43	18.90
	12H	16.19	16.81	16.68	17.29	17.76	17.41	18.03	17.89	18.51	18.98
8H	4H	16.09	16.79	16.56	17.23	17.70	16.73	17.43	17.20	17.87	18.34
	6H	16.44	17.01	16.94	17.51	17.99	17.37	17.93	17.87	18.43	18.91
	8H	16.52	17.03	17.04	17.55	18.04	17.60	18.11	18.12	18.62	19.11
	12H	16.54	16.99	17.05	17.48	18.05	17.79	18.24	18.30	18.73	19.30
12H	4H	16.11	16.72	16.59	17.20	17.68	16.72	17.33	17.20	17.82	18.29
	6H	16.47	16.98	16.99	17.49	17.98	17.36	17.87	17.88	18.38	18.87
	8H	16.58	17.03	17.10	17.53	18.10	17.64	18.09	18.15	18.58	19.15