

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1058273

Luminaire Tested: S122RDRP-H1005D950-X4F0-XX-UDD-WVL-S

Issue Date: 8/7/2025

Test Information

Test Method: LM-79-2024
Report Number: P1058273
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-58)
Test Lab: INNOVATION CENTER
Issue Date: 8/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S122RDRP-H1005D950-X4F0-XX-UDD-WVL-S
Description: DEFINE 2 SILVER REGRESSED DIRECT RECESSED HOUSING WITH WHITE STRAIGHT BLADE
LOUVER WITH DIFFUSER
HIGH PERFORMANCE LIGHT ENGINE
Light Source: 5000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1530.8 lumens
Efficiency: N/A
Efficacy: 41.9 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 1.05 / 1.05
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 36.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1058273

CATALOG NUMBER: S122RDRP-H1005D950-X4F0-XX-UDD-WVL-S

Luminous Intensity Polar Plot

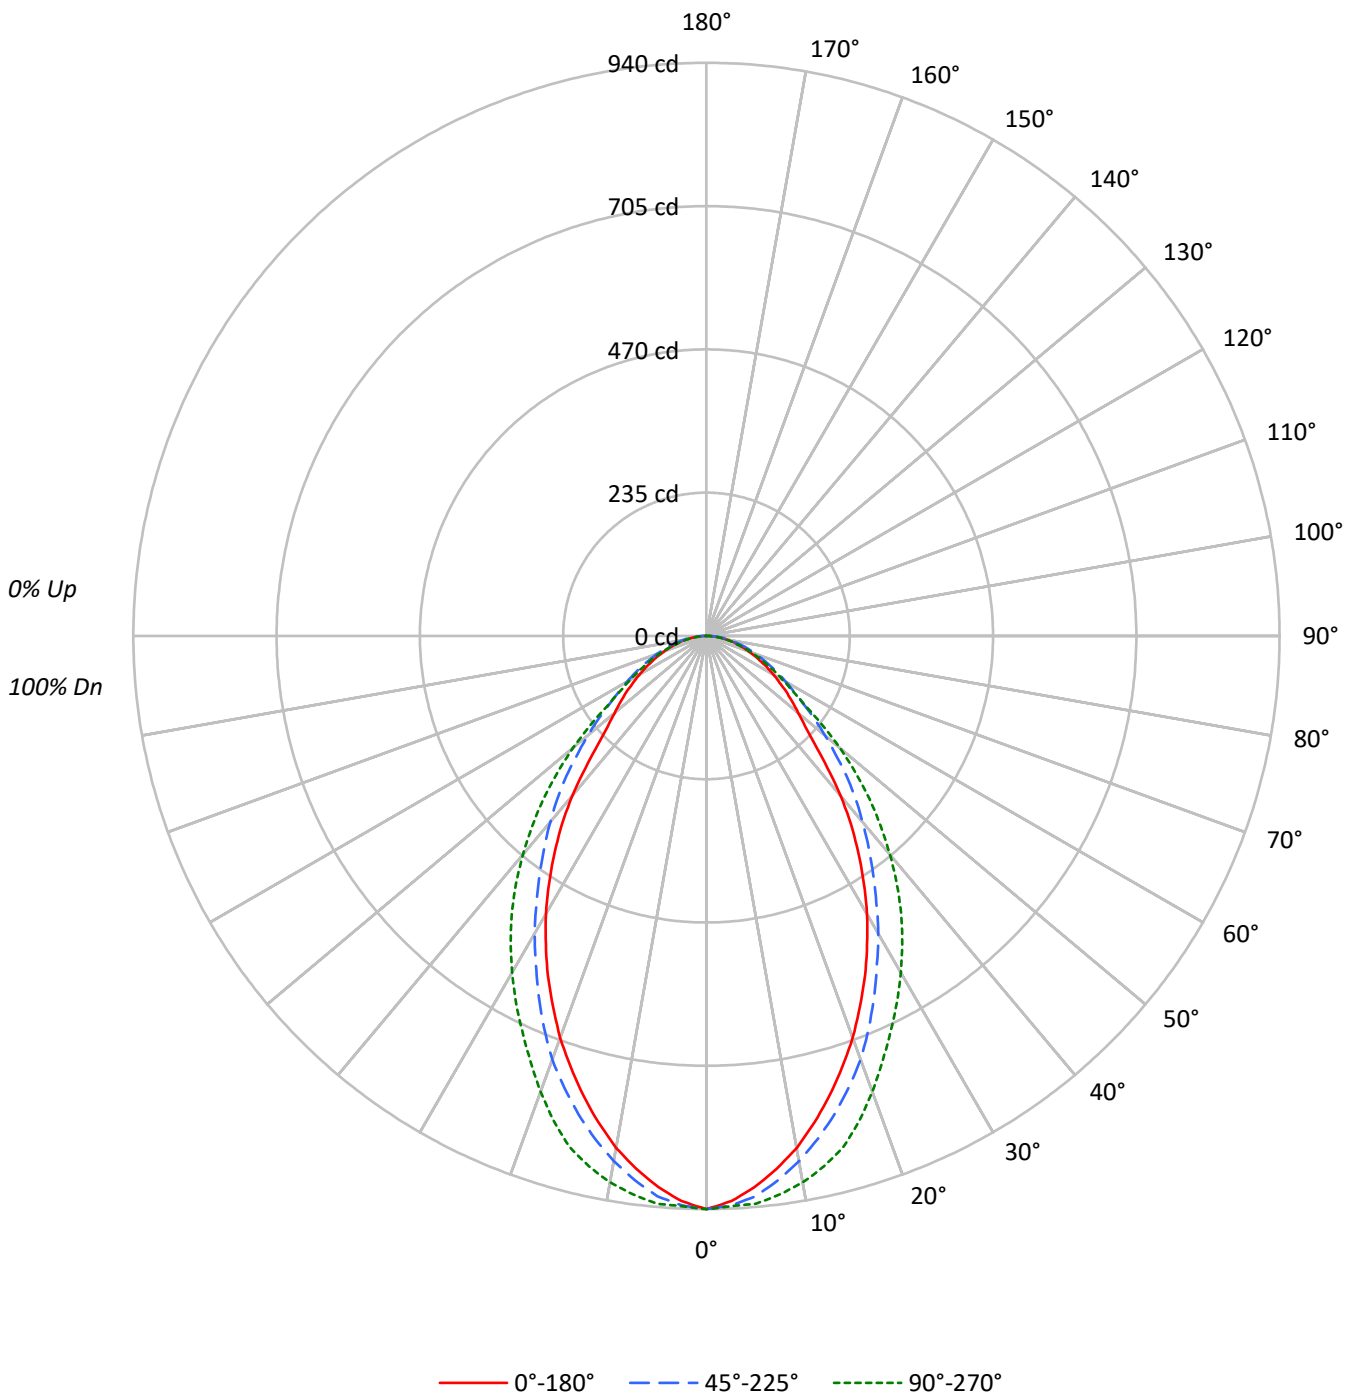



TEST NUMBER: P1058273

CATALOG NUMBER: S122RDRP-H1005D950-X4F0-XX-UDD-WVL-S

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																												
1	110	106	103	99	108	104	101	98	100	97	95	96	94	92	93	91	89	87																												
2	102	95	89	84	100	93	88	83	90	85	81	87	83	79	84	80	78	76																												
3	94	85	78	73	92	84	77	72	81	75	71	78	73	69	76	72	68	66																												
4	88	77	69	63	85	76	69	63	73	67	62	71	66	61	69	64	61	59																												
5	81	70	62	56	79	69	61	56	67	60	55	65	59	55	63	58	54	52																												
6	76	64	56	50	74	63	56	50	61	55	50	60	54	49	58	53	49	47																												
7	71	59	51	45	69	58	51	45	57	50	45	55	49	45	54	49	44	43																												
8	67	54	47	41	65	54	46	41	52	46	41	51	45	41	50	45	41	39																												
9	63	50	43	38	61	50	43	38	49	42	38	48	42	37	47	41	37	36																												
10	59	47	40	35	58	46	39	35	45	39	35	45	39	34	44	38	34	33																												

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	17347	17347	17347
5°	16806	17084	17312
10°	15977	16387	17051
15°	14908	15508	16578
20°	13771	14521	15619
25°	12528	13250	14555
30°	11222	12007	13577
35°	9774	10727	12540
40°	8250	9597	11273
45°	6550	8473	9862
50°	5641	7286	8187
55°	5134	6232	6277
60°	4683	5539	5336
65°	4288	5004	4707
70°	3976	4640	4197
75°	3693	4378	3693
80°	3475	4208	3337
85°	3472	4340	2879

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 9862 cd/sqm

TEST NUMBER: P1058273

CATALOG NUMBER: S122RDRP-H1005D950-X4F0-XX-UDD-WVL-S

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	86.8	5.7
10°-20°	229.4	15.0
20°-30°	301.9	19.7
30°-40°	303.6	19.8
40°-50°	246.0	16.1
50°-60°	169.5	11.1
60°-70°	110.9	7.2
70°-80°	61.8	4.0
80°-90°	20.9	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	618.1	40.4
0°-40°	921.7	60.2
0°-60°	1337.2	87.4
0°-90°	1530.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1530.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	940	940	940	940	940	
5°	907	925	922	926	935	85
15°	780	800	812	842	868	219
25°	615	632	651	680	715	282
35°	434	454	476	518	557	271
45°	251	280	325	353	378	199
55°	160	177	194	198	195	143
65°	98	117	115	109	108	98
75°	52	64	61	55	52	55
85°	16	22	20	18	14	18
90°	0	0	0	0	0	

TEST NUMBER: P1058273

CATALOG NUMBER: S122RDRP-H1005D950-X4F0-XX-UDD-WVL-S

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	940.1	940.1	940.1	940.1	940.1
2.5°	927.8	944.2	934.6	934.6	936.0
5°	907.3	925.1	922.3	926.4	934.6
7.5°	881.4	900.5	900.5	912.8	923.7
10°	852.7	871.8	874.6	893.7	910.0
12.5°	817.3	836.4	844.6	869.1	890.9
15°	780.4	799.5	811.8	841.8	867.8
17.5°	740.9	760.0	776.3	807.7	833.6
20°	701.3	719.0	739.5	766.8	795.4
22.5°	657.6	676.7	695.8	721.8	754.5
25°	615.3	631.7	650.8	679.5	714.9
27.5°	570.3	588.1	605.8	639.9	676.7
30°	526.7	544.4	563.5	599.0	637.2
32.5°	480.3	499.4	518.5	558.0	597.6
35°	433.9	454.3	476.2	518.5	556.7
37.5°	388.9	410.7	436.6	480.3	513.0
40°	342.5	365.7	398.4	436.6	468.0
42.5°	293.3	322.0	361.6	394.3	423.0
45°	251.0	279.7	324.7	353.4	377.9
47.5°	219.7	242.9	286.5	311.1	331.5
50°	196.5	214.2	253.8	271.5	285.2
52.5°	177.4	195.1	222.4	234.7	238.8
55°	159.6	177.4	193.7	197.8	195.1
57.5°	141.9	161.0	170.5	166.5	166.5
60°	126.9	147.4	150.1	144.6	144.6
62.5°	111.9	132.3	132.3	125.5	125.5
65°	98.2	117.3	114.6	109.2	107.8
67.5°	86.0	103.7	99.6	94.1	92.8
70°	73.7	90.0	86.0	79.1	77.8
72.5°	62.8	77.8	72.3	66.9	64.1
75°	51.8	64.1	61.4	54.6	51.8
77.5°	42.3	51.8	49.1	43.7	40.9
80°	32.7	40.9	39.6	34.1	31.4
82.5°	24.6	31.4	30.0	25.9	21.8
85°	16.4	21.8	20.5	17.7	13.6
87.5°	8.2	15.0	13.6	12.3	6.8
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1058273

CATALOG NUMBER: S122RDRP-H1005D950-X4F0-XX-UDD-WVL-S

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	16.64	18.08	17.01	18.40	18.71	17.00	18.44	17.37	18.76	19.07
	3H	18.19	19.48	18.57	19.81	20.17	18.35	19.64	18.73	19.97	20.33
	4H	18.76	19.97	19.16	20.32	20.70	18.83	20.04	19.23	20.39	20.77
	6H	19.19	20.30	19.60	20.67	21.06	19.19	20.30	19.60	20.67	21.06
	8H	19.34	20.40	19.77	20.79	21.20	19.30	20.36	19.73	20.75	21.15
	12H	19.46	20.47	19.89	20.85	21.28	19.38	20.39	19.81	20.77	21.20
4H	2H	17.23	18.44	17.63	18.79	19.17	17.52	18.73	17.92	19.08	19.46
	3H	19.05	20.05	19.46	20.45	20.86	19.09	20.09	19.50	20.49	20.90
	4H	19.80	20.70	20.23	21.12	21.56	19.70	20.60	20.13	21.01	21.45
	6H	20.38	21.17	20.84	21.61	22.07	20.18	20.96	20.64	21.40	21.87
	8H	20.59	21.33	21.06	21.77	22.24	20.34	21.07	20.81	21.52	21.99
	12H	20.76	21.41	21.25	21.89	22.37	20.46	21.11	20.94	21.59	22.07
8H	4H	20.08	20.81	20.55	21.26	21.73	20.00	20.73	20.46	21.17	21.64
	6H	20.84	21.44	21.34	21.94	22.41	20.61	21.22	21.11	21.71	22.19
	8H	21.16	21.70	21.68	22.22	22.71	20.86	21.40	21.38	21.92	22.41
	12H	21.45	21.93	21.96	22.42	22.99	21.07	21.55	21.58	22.04	22.61
12H	4H	20.10	20.75	20.59	21.23	21.71	20.03	20.68	20.51	21.16	21.63
	6H	20.90	21.44	21.41	21.95	22.44	20.69	21.23	21.21	21.75	22.23
	8H	21.30	21.78	21.81	22.27	22.84	21.01	21.49	21.52	21.98	22.55