

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1057942

Luminaire Tested: S122RDRP-S290D950-X4F0-XX-UDD-BVL-B

Issue Date: 8/7/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1057942  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2406-143-21)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/7/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S122RDRP-S290D950-X4F0-XX-UDD-BVL-B  
Description: DEFINE 2 BLACK REGRESSED DIRECT RECESSED HOUSING WITH BLACK STRAIGHT BLADE LOUVER WITH DIFFUSER  
CORE LIGHT ENGINE  
Light Source: 5000K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 180.9 lumens  
Efficiency: N/A  
Efficacy: 14.5 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.8 / 0.88  
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.5  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1057942

CATALOG NUMBER: S122RDRP-S290D950-X4F0-XX-UDD-BVL-B

### Luminous Intensity Polar Plot

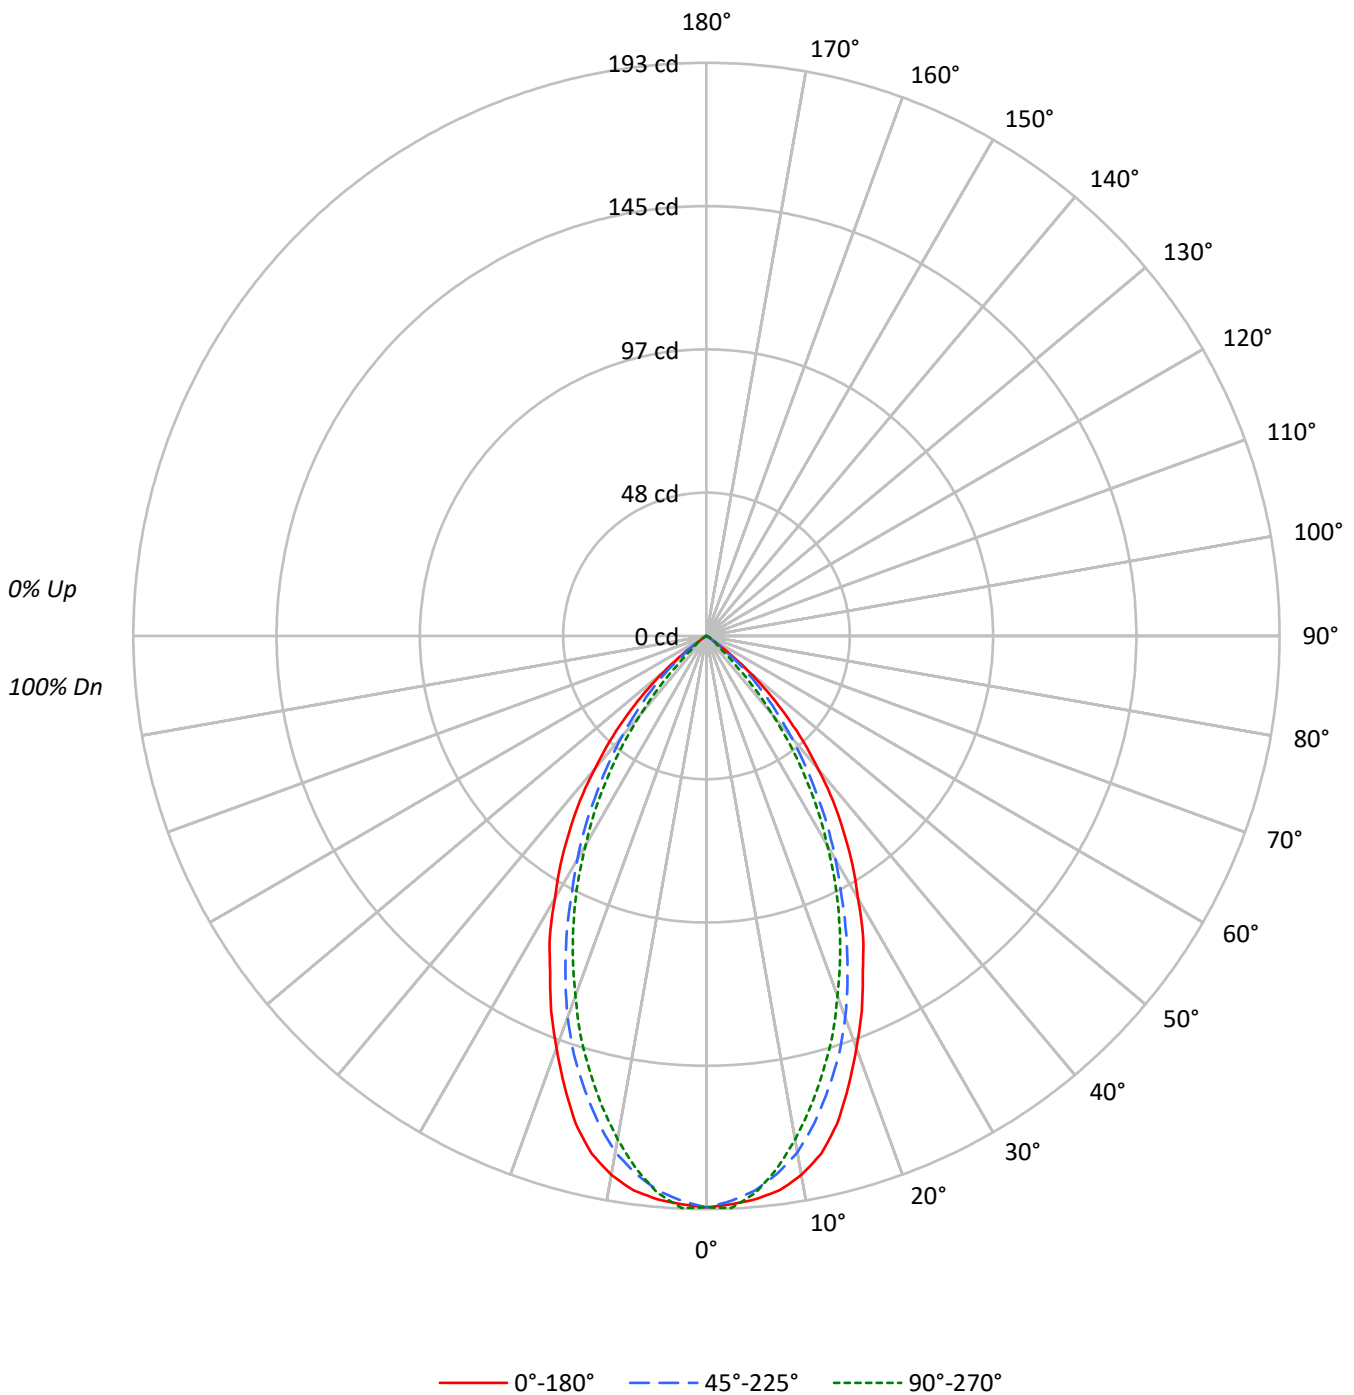



TEST NUMBER: P1057942

CATALOG NUMBER: S122RDRP-S290D950-X4F0-XX-UDD-BVL-B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100	100		
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93	93	93	93	93	93	93		
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	87	86	86	86	86	86	86	86		
3	101	95	90	85	99	93	89	85	91	87	83	88	85	82	86	83	81	79	79	79	79	79	79	79		
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	75	73	73	73	73	73	73	73		
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67	67	67	67	67	67	67		
6	86	76	70	66	84	76	70	65	74	69	65	73	68	64	71	67	64	62	62	62	62	62	62	62		
7	81	71	65	61	80	71	65	61	69	64	60	68	63	60	67	63	60	58	58	58	58	58	58	58		
8	77	67	61	56	76	66	60	56	65	60	56	64	59	56	63	59	56	54	54	54	54	54	54	54		
9	73	63	57	53	72	62	57	52	61	56	52	61	56	52	60	55	52	51	51	51	51	51	51	51		
10	69	59	53	49	68	59	53	49	58	53	49	57	52	49	56	52	49	47	47	47	47	47	47	47		

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3550	3550	3550
5°	3527	3473	3488
10°	3453	3307	3225
15°	3248	3022	2898
20°	2900	2684	2531
25°	2535	2270	2154
30°	2175	1854	1734
35°	1813	1448	1302
40°	1412	1067	833
45°	986	712	360
50°	537	373	129
55°	77	132	90
60°	15	30	59
65°	0	17	35
70°	0	0	22
75°	0	0	0
80°	0	0	0
85°	0	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 986 cd/sqm



TEST NUMBER: P1057942

CATALOG NUMBER: S122RDRP-S290D950-X4F0-XX-UDD-BVL-B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	17.7	9.8
10°-20°	44.6	24.6
20°-30°	51.9	28.7
30°-40°	41.6	23.0
40°-50°	20.7	11.4
50°-60°	4.1	2.3
60°-70°	0.4	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	114.2	63.1
0°-40°	155.8	86.1
0°-60°	180.5	99.8
0°-90°	180.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	180.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	192	192	192	192	192	
5°	190	190	188	188	188	18
15°	170	167	158	154	152	47
25°	124	118	112	109	106	57
35°	80	72	64	61	58	50
45°	38	33	27	18	14	29
55°	2	5	4	2	3	5
65°	0	0	0	0	1	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P1057942

CATALOG NUMBER: S122RDRP-S290D950-X4F0-XX-UDD-BVL-B

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	192.4	192.4	192.4	192.4	192.4
2.5°	191.6	192.4	190.4	192.4	192.8
5°	190.4	190.4	187.5	187.9	188.3
7.5°	188.3	187.5	182.6	181.8	181.0
10°	184.3	182.6	176.5	173.3	172.1
12.5°	178.6	176.1	168.0	164.3	162.3
15°	170.0	166.8	158.2	154.2	151.7
17.5°	159.0	156.2	148.1	143.6	141.1
20°	147.7	143.6	136.7	132.2	128.9
22.5°	136.7	131.4	124.1	120.8	117.6
25°	124.5	118.4	111.5	109.0	105.8
27.5°	114.3	106.6	98.4	96.8	94.0
30°	102.1	94.8	87.0	84.6	81.4
32.5°	91.5	83.4	75.7	72.8	70.0
35°	80.5	72.4	64.3	61.4	57.8
37.5°	70.0	62.2	54.1	49.6	46.4
40°	58.6	52.1	44.3	38.6	34.6
42.5°	48.4	42.7	35.4	28.1	24.0
45°	37.8	33.4	27.3	18.3	13.8
47.5°	28.1	24.8	19.9	10.6	7.3
50°	18.7	17.5	13.0	5.3	4.5
52.5°	10.2	11.0	7.7	3.3	3.7
55°	2.4	4.9	4.1	2.4	2.8
57.5°	0.4	0.8	2.0	2.0	2.0
60°	0.4	0.4	0.8	1.2	1.6
62.5°	0.4	0.0	0.4	0.8	1.2
65°	0.0	0.0	0.4	0.4	0.8
67.5°	0.0	0.0	0.0	0.4	0.4
70°	0.0	0.0	0.0	0.4	0.4
72.5°	0.0	0.0	0.0	0.0	0.4
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1057942  
 CATALOG NUMBER: S122RDRP-S290D950-X4F0-XX-UDD-BVL-B

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4H	2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	3H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	12H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
12H	4H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	6H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	8H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00