

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1055683

Luminaire Tested: S123R3DRP-H1000D830-X4F0-XX-UDD-F-B

Issue Date: 7/25/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1055683  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2503-402-5)  
Test Lab: INNOVATION CENTER  
Issue Date: 7/25/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123R3DRP-H1000D830-X4F0-XX-UDD-F-B  
Description: DEFINE 3, BLACK 3-INCH REGRESSED DIRECT RECESSED HOUSING WITH FROSTED LENS  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 3000K CCT, 80 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1328.1 lumens  
Efficiency: N/A  
Efficacy: 43.0 lumens/watt  
Spacing Criteria (0/90/45): 1.17 / 0.7 / 0.86  
Luminous Opening: Rectangular (W 0.23' x L: 3.9' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 30.9  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1055683

CATALOG NUMBER: S123R3DRP-H1000D830-X4F0-XX-UDD-F-B

### Luminous Intensity Polar Plot

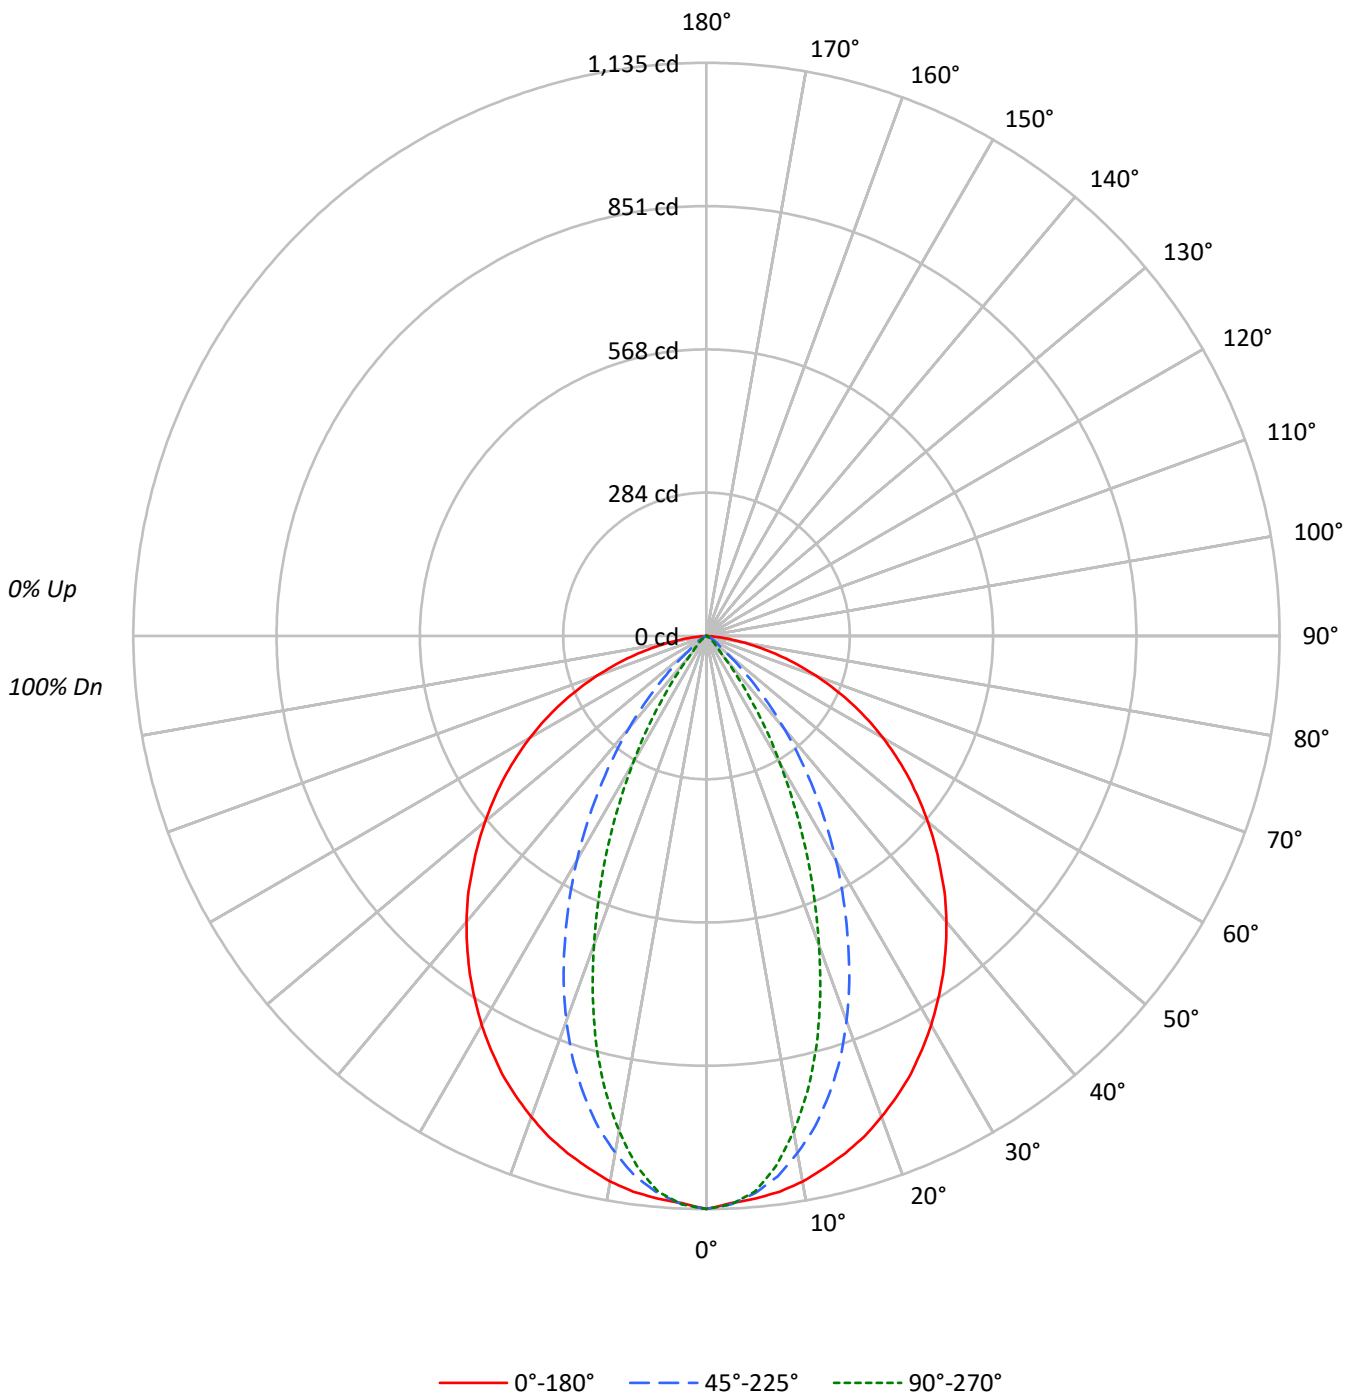



TEST NUMBER: P1055683

CATALOG NUMBER: S123R3DRP-H1000D830-X4F0-XX-UDD-F-B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	103	109	106	104	101	102	100	98	98	97	95	95	93	92	90
2	105	99	94	89	102	97	92	88	93	90	86	90	87	84	87	85	83	81
3	98	90	84	79	96	88	83	78	86	81	77	83	79	76	81	77	74	73
4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	65
5	86	76	69	63	84	75	68	63	73	67	62	71	66	62	69	65	61	59
6	81	70	63	57	79	69	62	57	67	61	57	66	61	56	64	60	56	54
7	76	65	58	53	74	64	57	52	63	57	52	61	56	52	60	55	52	50
8	71	60	53	48	70	60	53	48	58	52	48	57	52	48	56	51	48	46
9	68	56	49	45	66	56	49	45	55	49	45	54	48	44	53	48	44	43
10	64	53	46	42	63	52	46	42	51	46	41	51	45	41	50	45	41	40

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	13680	13680	13680
5°	13533	13405	13362
10°	13430	12725	12191
15°	13238	11724	10505
20°	13003	10405	8367
25°	12731	8816	6170
30°	12389	7145	4047
35°	12023	5440	2218
40°	11634	3760	760
45°	11178	2188	442
50°	10731	861	264
55°	10268	544	124
60°	9734	340	58
65°	9066	168	34
70°	8132	85	42
75°	6908	56	56
80°	5152	83	0
85°	1950	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 11178 cd/sqm



TEST NUMBER: P1055683

CATALOG NUMBER: S123R3DRP-H1000D830-X4F0-XX-UDD-F-B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	104.0	7.8
10°-20°	264.0	19.9
20°-30°	314.9	23.7
30°-40°	267.1	20.1
40°-50°	181.6	13.7
50°-60°	112.5	8.5
60°-70°	57.0	4.3
70°-80°	23.3	1.8
80°-90°	3.6	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	683.0	51.4
0°-40°	950.1	71.5
0°-60°	1244.2	93.7
0°-90°	1328.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1328.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1135	1135	1135	1135	1135	
5°	1118	1129	1108	1099	1104	106
15°	1061	1034	939	865	842	299
25°	957	868	663	512	464	440
35°	817	656	370	199	151	511
45°	656	430	128	32	26	506
55°	488	217	26	9	6	436
65°	318	53	6	1	1	314
75°	148	9	1	1	1	158
85°	14	0	0	1	0	25
90°	0	0	0	0	0	



TEST NUMBER: P1055683

CATALOG NUMBER: S123R3DRP-H1000D830-X4F0-XX-UDD-F-B

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1134.7	1134.7	1134.7	1134.7	1134.7
2.5°	1124.1	1139.4	1126.5	1125.3	1126.5
5°	1118.2	1128.8	1107.6	1099.4	1104.1
7.5°	1110.0	1114.7	1079.4	1058.2	1058.2
10°	1097.0	1093.5	1039.4	1004.1	995.8
12.5°	1079.4	1065.3	994.6	939.3	924.0
15°	1060.6	1033.5	939.3	865.2	841.6
17.5°	1039.4	998.2	879.3	782.8	748.6
20°	1013.5	958.1	811.0	693.3	652.1
22.5°	986.4	914.6	739.2	601.5	555.6
25°	957.0	867.5	662.7	512.0	463.8
27.5°	924.0	818.1	587.4	426.1	373.1
30°	889.9	766.3	513.2	343.7	290.7
32.5°	853.4	712.1	439.1	268.4	218.9
35°	816.9	655.6	369.6	198.9	150.7
37.5°	778.1	599.1	302.5	137.7	95.3
40°	739.2	543.8	238.9	87.1	48.3
42.5°	699.2	486.1	181.3	43.6	33.0
45°	655.6	429.6	128.3	31.8	25.9
47.5°	614.4	375.5	84.8	25.9	20.0
50°	572.1	321.3	45.9	18.8	14.1
52.5°	529.7	269.6	33.0	14.1	9.4
55°	488.5	216.6	25.9	9.4	5.9
57.5°	446.1	170.7	20.0	5.9	3.5
60°	403.7	125.9	14.1	3.5	2.4
62.5°	361.4	87.1	9.4	2.4	1.2
65°	317.8	53.0	5.9	1.2	1.2
67.5°	273.1	36.5	3.5	1.2	1.2
70°	230.7	25.9	2.4	1.2	1.2
72.5°	188.3	16.5	1.2	1.2	0.0
75°	148.3	9.4	1.2	1.2	1.2
77.5°	109.5	3.5	1.2	1.2	0.0
80°	74.2	1.2	1.2	1.2	0.0
82.5°	41.2	0.0	1.2	1.2	0.0
85°	14.1	0.0	0.0	1.2	0.0
87.5°	0.0	0.0	0.0	1.2	0.0
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1055683  
 CATALOG NUMBER: S123R3DRP-H1000D830-X4F0-XX-UDD-F-B

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	18.14	19.42	18.50	19.73	20.05	0.00	0.00	0.00	0.00	0.00
	3H	20.08	21.22	20.46	21.55	21.91	0.00	0.00	0.00	0.00	0.00
	4H	20.91	21.96	21.31	22.32	22.70	0.00	0.00	0.00	0.00	0.00
	6H	21.46	22.43	21.88	22.80	23.20	0.00	0.00	0.00	0.00	0.00
	8H	21.59	22.51	22.02	22.90	23.30	0.00	0.00	0.00	0.00	0.00
	12H	21.61	22.49	22.05	22.87	23.30	0.00	0.00	0.00	0.00	0.00
4H	2H	17.90	18.96	18.30	19.31	19.69	0.00	0.00	0.00	0.00	0.00
	3H	19.85	20.72	20.27	21.12	21.52	0.00	0.00	0.00	0.00	0.00
	4H	20.67	21.44	21.10	21.86	22.30	0.00	0.00	0.00	0.00	0.00
	6H	21.27	21.93	21.73	22.38	22.85	0.00	0.00	0.00	0.00	0.00
	8H	21.42	22.04	21.89	22.49	22.96	0.00	0.00	0.00	0.00	0.00
	12H	21.47	22.01	21.95	22.50	22.97	0.00	0.00	0.00	0.00	0.00
8H	4H	20.52	21.14	20.99	21.59	22.06	0.00	0.00	0.00	0.00	0.00
	6H	21.11	21.61	21.61	22.11	22.59	0.00	0.00	0.00	0.00	0.00
	8H	21.26	21.71	21.78	22.22	22.72	0.00	0.00	0.00	0.00	0.00
	12H	21.31	21.71	21.83	22.20	22.78	0.00	0.00	0.00	0.00	0.00
12H	4H	20.48	21.02	20.96	21.50	21.98	0.00	0.00	0.00	0.00	0.00
	6H	21.04	21.49	21.57	22.01	22.50	0.00	0.00	0.00	0.00	0.00
	8H	21.21	21.61	21.73	22.10	22.67	0.00	0.00	0.00	0.00	0.00