

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1055810

Luminaire Tested: S123R3DRP-H775D935-X4F0-XX-UDD-F-S

Issue Date: 7/25/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1055810  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2503-402-6)  
Test Lab: INNOVATION CENTER  
Issue Date: 7/25/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123R3DRP-H775D935-X4F0-XX-UDD-F-S  
Description: DEFINE 3, SILVER 3-INCH REGRESSED DIRECT RECESSED HOUSING WITH FROSTED LENS  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 3500K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1223.3 lumens  
Efficiency: N/A  
Efficacy: 51.4 lumens/watt  
Spacing Criteria (0/90/45): 1.17 / 0.77 / 0.94  
Luminous Opening: Rectangular (W 0.23' x L: 3.9' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 23.8  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1055810

CATALOG NUMBER: S123R3DRP-H775D935-X4F0-XX-UDD-F-S

### Luminous Intensity Polar Plot

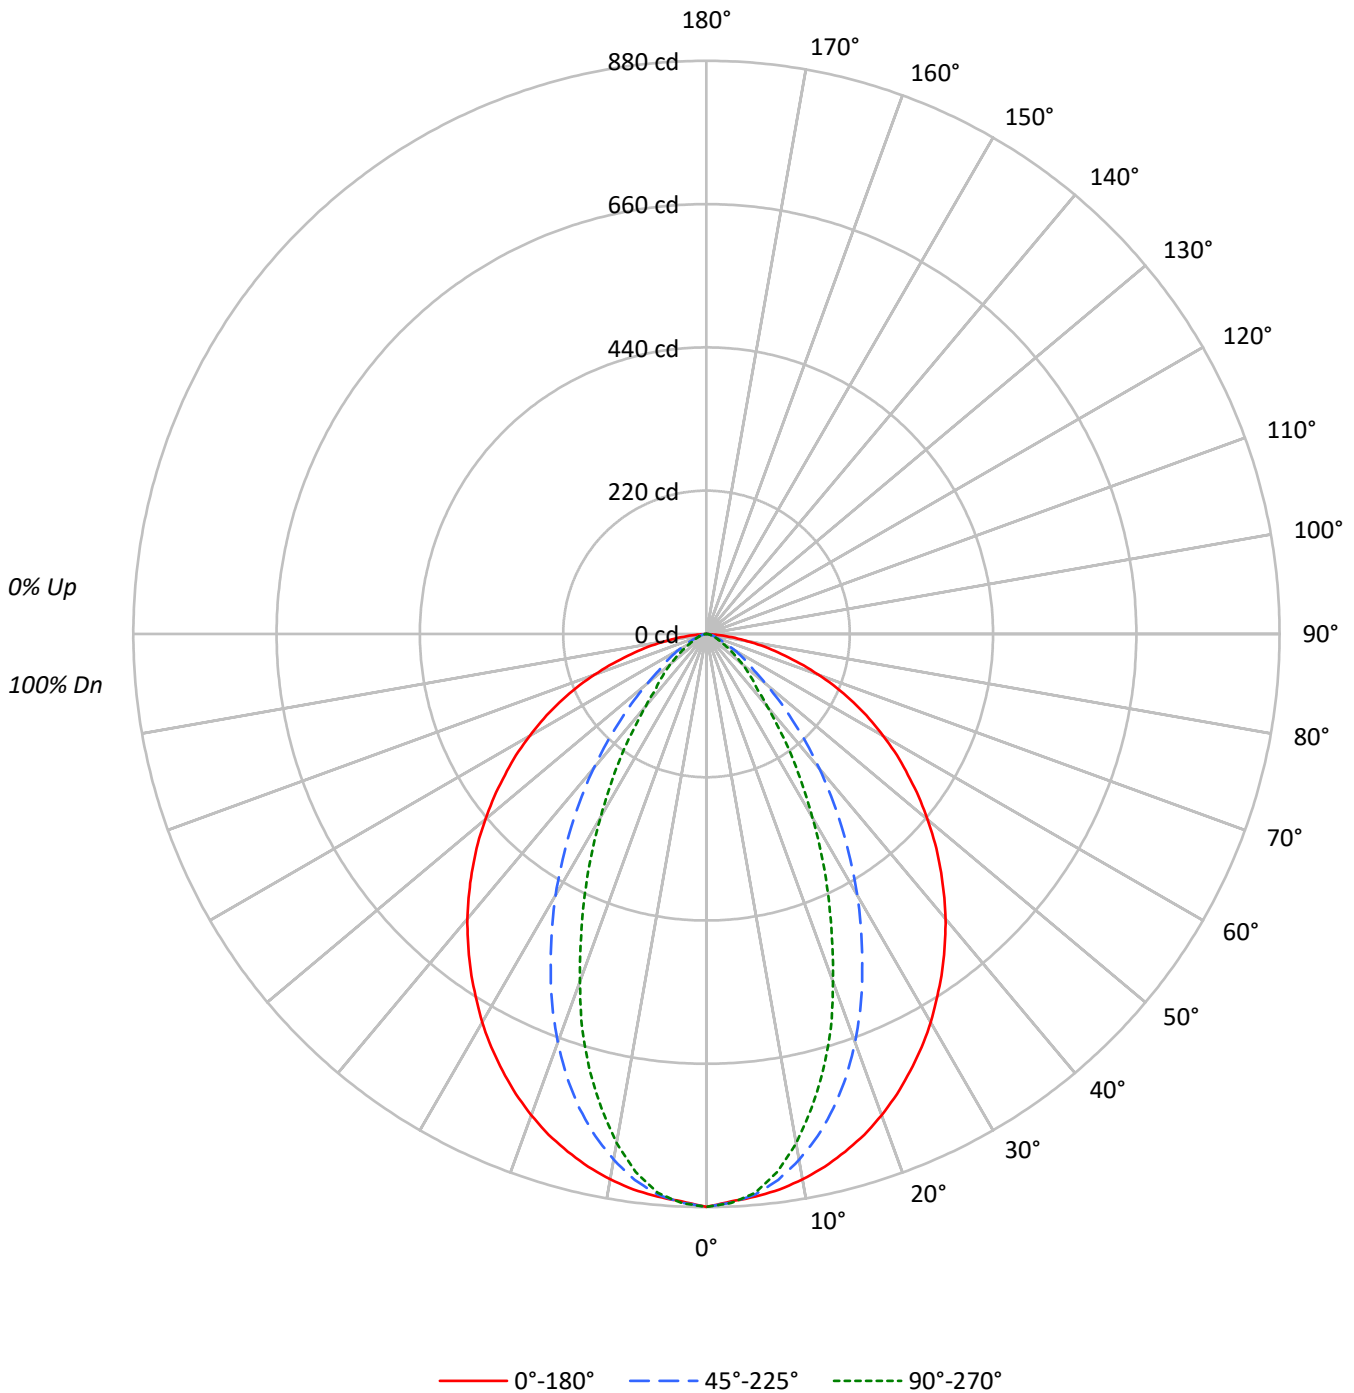



TEST NUMBER: P1055810

CATALOG NUMBER: S123R3DRP-H775D935-X4F0-XX-UDD-F-S

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	111	108	104	102	109	106	103	100	101	99	97	98	96	94	94	93	91	89					89			
2	104	97	92	87	101	95	90	86	92	88	84	89	85	82	86	83	81	79					79			
3	96	88	81	76	94	86	80	76	84	78	74	81	77	73	79	75	72	70					70			
4	90	80	73	67	88	79	72	67	76	71	66	74	69	65	72	68	64	62					62			
5	84	73	66	60	82	72	65	60	70	64	59	68	63	59	67	62	58	56					56			
6	78	67	60	54	77	66	59	54	65	58	53	63	57	53	62	57	53	51					51			
7	73	62	54	49	72	61	54	49	60	53	49	58	53	48	57	52	48	46					46			
8	69	57	50	45	68	57	50	45	56	49	45	54	49	44	53	48	44	42					42			
9	65	53	46	41	64	53	46	41	52	45	41	51	45	41	50	45	41	39					39			
10	62	50	43	38	60	49	43	38	48	42	38	48	42	38	47	42	38	36					36			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	10605	10605	10605
5°	10494	10454	10424
10°	10411	10034	9717
15°	10271	9407	8649
20°	10087	8558	7285
25°	9849	7531	5878
30°	9588	6454	4527
35°	9290	5326	3350
40°	8988	4238	2284
45°	8658	3170	1720
50°	8303	2206	1345
55°	7939	1612	982
60°	7559	1206	704
65°	7112	807	548
70°	6437	589	441
75°	5553	429	349
80°	4457	347	292
85°	2310	346	235

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 8658 cd/sqm



TEST NUMBER: P1055810

CATALOG NUMBER: S123R3DRP-H775D935-X4F0-XX-UDD-F-S

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	81.3	6.6
10°-20°	211.7	17.3
20°-30°	265.9	21.7
30°-40°	247.7	20.2
40°-50°	189.6	15.5
50°-60°	126.0	10.3
60°-70°	67.9	5.6
70°-80°	27.8	2.3
80°-90°	5.3	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	558.9	45.7
0°-40°	806.6	65.9
0°-60°	1122.2	91.7
0°-90°	1223.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1223.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	880	880	880	880	880	
5°	867	876	864	860	861	82
15°	823	810	754	710	693	232
25°	740	690	566	472	442	341
35°	631	538	362	256	228	395
45°	508	375	186	109	101	392
55°	378	218	77	53	47	338
65°	249	84	28	21	19	246
75°	119	20	9	8	8	128
85°	17	2	2	2	2	25
90°	0	0	0	0	0	



TEST NUMBER: P1055810

CATALOG NUMBER: S123R3DRP-H775D935-X4F0-XX-UDD-F-S

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	879.6	879.6	879.6	879.6	879.6
2.5°	872.1	883.0	873.8	874.6	874.6
5°	867.1	876.3	863.8	860.4	861.3
7.5°	860.4	866.3	845.4	834.6	832.9
10°	850.4	852.1	819.6	800.4	793.7
12.5°	837.9	832.1	789.6	757.9	745.4
15°	822.9	809.6	753.7	709.5	692.9
17.5°	806.2	783.7	712.9	655.3	635.3
20°	786.2	754.6	667.0	595.3	567.8
22.5°	764.6	723.7	618.7	533.6	502.8
25°	740.4	690.4	566.1	471.9	441.9
27.5°	715.4	654.5	514.4	413.5	382.7
30°	688.7	617.8	463.6	356.9	325.2
32.5°	659.5	577.8	411.0	304.3	272.6
35°	631.2	537.8	361.9	256.0	227.6
37.5°	601.1	497.8	314.3	213.4	181.8
40°	571.1	456.9	269.3	171.8	145.1
42.5°	539.4	416.0	226.8	136.7	115.9
45°	507.8	375.2	185.9	109.2	100.9
47.5°	476.1	334.3	150.1	94.2	85.9
50°	442.7	295.2	117.6	80.0	71.7
52.5°	411.0	256.0	91.7	65.9	58.4
55°	377.7	218.4	76.7	53.4	46.7
57.5°	346.8	180.1	63.4	41.7	36.7
60°	313.5	145.9	50.0	32.5	29.2
62.5°	281.8	114.2	38.4	25.8	23.3
65°	249.3	84.2	28.3	20.8	19.2
67.5°	216.8	60.9	21.7	16.7	15.8
70°	182.6	45.9	16.7	13.3	12.5
72.5°	150.1	32.5	12.5	10.8	10.0
75°	119.2	20.0	9.2	8.3	7.5
77.5°	91.7	11.7	6.7	6.7	5.8
80°	64.2	6.7	5.0	5.0	4.2
82.5°	39.2	4.2	3.3	3.3	3.3
85°	16.7	2.5	2.5	2.5	1.7
87.5°	2.5	0.8	0.8	0.8	0.8
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P1055810  
 CATALOG NUMBER: S123R3DRP-H775D935-X4F0-XX-UDD-F-S

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	18.02	19.37	18.38	19.69	20.00	6.59	7.95	6.96	8.26	8.58
	3H	19.77	20.98	20.15	21.31	21.67	7.25	8.46	7.63	8.79	9.15
	4H	20.47	21.59	20.87	21.94	22.33	7.45	8.57	7.85	8.92	9.31
	6H	20.98	22.02	21.40	22.39	22.78	7.57	8.60	7.98	8.97	9.37
	8H	21.12	22.10	21.55	22.49	22.90	7.60	8.58	8.03	8.97	9.38
	12H	21.17	22.11	21.61	22.49	22.92	7.61	8.55	8.05	8.93	9.36
4H	2H	17.83	18.95	18.23	19.30	19.68	7.15	8.27	7.55	8.62	9.00
	3H	19.62	20.54	20.03	20.94	21.35	7.94	8.86	8.36	9.27	9.67
	4H	20.31	21.14	20.75	21.55	22.00	8.20	9.02	8.63	9.44	9.88
	6H	20.88	21.59	21.35	22.04	22.50	8.40	9.11	8.86	9.55	10.02
	8H	21.06	21.72	21.53	22.17	22.64	8.45	9.11	8.92	9.56	10.03
	12H	21.14	21.73	21.63	22.21	22.69	8.48	9.07	8.97	9.55	10.03
8H	4H	20.19	20.85	20.66	21.30	21.77	8.52	9.18	8.98	9.62	10.10
	6H	20.74	21.29	21.25	21.78	22.26	8.76	9.30	9.26	9.80	10.28
	8H	20.92	21.41	21.44	21.92	22.41	8.85	9.34	9.37	9.85	10.34
	12H	21.03	21.45	21.54	21.95	22.52	8.93	9.36	9.44	9.85	10.42
12H	4H	20.15	20.73	20.63	21.22	21.69	8.56	9.15	9.05	9.63	10.10
	6H	20.69	21.17	21.21	21.69	22.18	8.81	9.30	9.33	9.81	10.30
	8H	20.88	21.31	21.39	21.80	22.37	8.93	9.36	9.45	9.86	10.43