

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1055763

Luminaire Tested: S123R3DRP-H340D950-X4F0-XX-UDD-F-W

Issue Date: 7/25/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1055763  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2503-402-4)  
Test Lab: INNOVATION CENTER  
Issue Date: 7/25/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123R3DRP-H340D950-X4F0-XX-UDD-F-W  
Description: DEFINE 3, WHITE 3-INCH REGRESSED DIRECT RECESSED HOUSING WITH FROSTED LENS  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 5000K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 971.3 lumens  
Efficiency: N/A  
Efficacy: 83.0 lumens/watt  
Spacing Criteria (0/90/45): 1.19 / 0.83 / 1.02  
Luminous Opening: Rectangular (W 0.23' x L: 3.9' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 11.7  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1055763

CATALOG NUMBER: S123R3DRP-H340D950-X4F0-XX-UDD-F-W

### Luminous Intensity Polar Plot

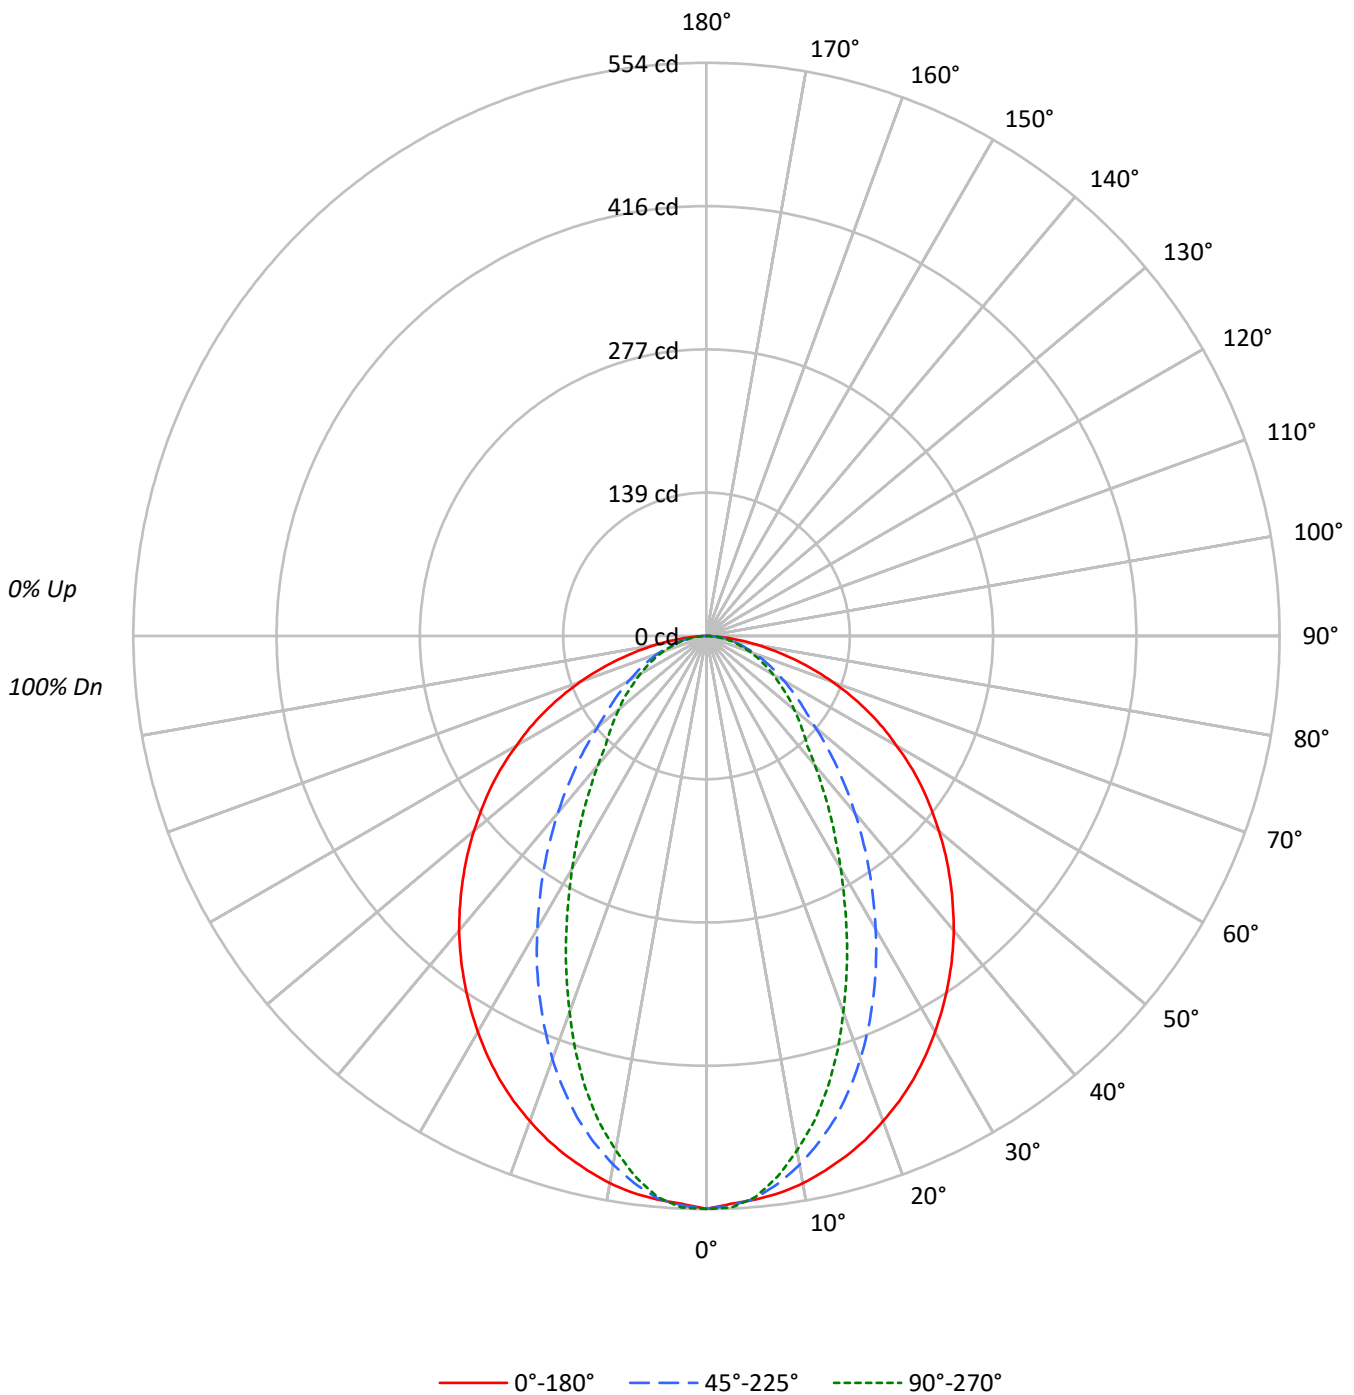



TEST NUMBER: P1055763

CATALOG NUMBER: S123R3DRP-H340D950-X4F0-XX-UDD-F-W

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	88	86
2	101	94	88	83	99	92	87	82	89	84	80	85	82	78	83	79	76	74
3	93	84	77	71	91	82	76	70	80	74	69	77	72	68	74	70	67	65
4	86	75	68	61	84	74	67	61	72	65	60	70	64	59	67	63	59	57
5	80	68	60	54	78	67	60	54	65	58	53	63	57	53	62	56	52	50
6	75	62	54	48	73	61	54	48	60	53	48	58	52	47	57	51	47	45
7	70	57	49	43	68	56	49	43	55	48	43	53	47	43	52	47	42	40
8	65	53	45	39	64	52	44	39	51	44	39	49	43	39	48	43	39	37
9	61	49	41	36	60	48	41	36	47	40	36	46	40	35	45	39	35	34
10	58	45	38	33	56	45	38	33	44	37	33	43	37	33	42	37	33	31

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	6677	6677	6677
5°	6618	6602	6587
10°	6577	6354	6181
15°	6499	6019	5645
20°	6404	5585	4964
25°	6292	5086	4270
30°	6153	4550	3610
35°	6005	4024	3048
40°	5855	3514	2562
45°	5678	3030	2261
50°	5501	2579	2074
55°	5337	2300	1915
60°	5114	2079	1787
65°	4904	1903	1677
70°	4572	1752	1576
75°	4090	1621	1486
80°	3506	1493	1382
85°	2462	1369	1314

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 5678 cd/sqm



TEST NUMBER: P1055763

CATALOG NUMBER: S123R3DRP-H340D950-X4F0-XX-UDD-F-W

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	51.3	5.3
10°-20°	135.8	14.0
20°-30°	178.9	18.4
30°-40°	181.6	18.7
40°-50°	157.9	16.3
50°-60°	123.7	12.7
60°-70°	84.0	8.7
70°-80°	45.5	4.7
80°-90°	12.5	1.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	366.1	37.7
0°-40°	547.7	56.4
0°-60°	829.2	85.4
0°-90°	971.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	971.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	554	554	554	554	554	
5°	547	553	546	541	544	52
15°	521	513	482	458	452	147
25°	473	444	382	335	321	218
35°	408	360	273	221	207	255
45°	333	267	178	137	133	257
55°	254	176	109	93	91	227
65°	172	95	67	60	59	170
75°	88	44	35	32	32	94
85°	18	11	10	9	10	22
90°	0	0	0	0	0	



TEST NUMBER: P1055763

CATALOG NUMBER: S123R3DRP-H340D950-X4F0-XX-UDD-F-W

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	553.8	553.8	553.8	553.8	553.8
2.5°	549.3	556.3	550.9	551.3	553.0
5°	546.8	553.4	545.5	540.6	544.3
7.5°	543.0	548.0	533.5	525.6	526.9
10°	537.2	538.9	519.0	506.6	504.9
12.5°	529.4	526.5	501.6	483.4	480.5
15°	520.7	513.2	482.2	458.5	452.3
17.5°	510.7	498.3	459.4	430.4	420.8
20°	499.1	481.7	435.3	398.5	386.9
22.5°	486.7	464.3	409.2	365.8	353.7
25°	473.0	444.5	382.3	334.7	321.0
27.5°	458.1	424.6	355.0	304.0	288.7
30°	442.0	403.9	326.8	274.2	259.3
32.5°	425.4	381.9	299.9	246.5	232.0
35°	408.0	359.5	273.4	221.2	207.1
37.5°	390.2	336.8	247.7	197.2	183.9
40°	372.0	313.6	223.3	174.8	162.8
42.5°	352.5	290.4	199.7	153.7	144.6
45°	333.0	267.2	177.7	137.1	132.6
47.5°	313.6	243.6	157.0	125.5	121.4
50°	293.3	220.8	137.5	114.7	110.6
52.5°	273.4	198.4	121.4	104.4	101.5
55°	253.9	176.5	109.4	93.2	91.1
57.5°	233.6	154.9	97.3	84.5	82.0
60°	212.1	134.2	86.2	75.4	74.1
62.5°	192.6	114.7	76.2	67.5	66.3
65°	171.9	95.3	66.7	59.6	58.8
67.5°	150.8	79.1	58.0	52.2	51.8
70°	129.7	66.7	49.7	45.1	44.7
72.5°	108.9	55.1	41.8	38.9	38.1
75°	87.8	43.9	34.8	32.3	31.9
77.5°	68.8	34.0	27.8	26.1	25.7
80°	50.5	25.3	21.5	20.3	19.9
82.5°	33.1	17.4	15.3	14.5	14.5
85°	17.8	10.8	9.9	9.1	9.5
87.5°	6.2	4.6	4.6	4.1	4.6
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1055763

CATALOG NUMBER: S123R3DRP-H340D950-X4F0-XX-UDD-F-W

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	17.15	18.65	17.52	18.96	19.27	12.30	13.80	12.67	14.11	14.42
	3H	19.04	20.38	19.42	20.71	21.07	13.93	15.27	14.31	15.60	15.96
	4H	19.80	21.05	20.20	21.40	21.78	14.57	15.82	14.97	16.17	16.55
	6H	20.36	21.52	20.77	21.89	22.28	15.06	16.22	15.47	16.58	16.98
	8H	20.53	21.64	20.96	22.03	22.43	15.23	16.33	15.66	16.72	17.12
	12H	20.63	21.69	21.06	22.07	22.50	15.35	16.41	15.78	16.79	17.22
4H	2H	17.20	18.46	17.60	18.81	19.18	13.03	14.29	13.43	14.64	15.02
	3H	19.22	20.26	19.63	20.66	21.06	14.85	15.90	15.26	16.30	16.70
	4H	20.03	20.97	20.47	21.39	21.83	15.60	16.54	16.03	16.95	17.39
	6H	20.72	21.54	21.18	21.98	22.44	16.21	17.03	16.67	17.47	17.93
	8H	20.95	21.71	21.41	22.16	22.62	16.42	17.19	16.89	17.63	18.10
	12H	21.10	21.78	21.58	22.26	22.73	16.59	17.27	17.07	17.75	18.22
8H	4H	20.06	20.82	20.52	21.27	21.74	15.98	16.75	16.45	17.19	17.66
	6H	20.79	21.42	21.29	21.91	22.39	16.71	17.34	17.21	17.83	18.31
	8H	21.06	21.62	21.57	22.13	22.62	17.00	17.56	17.51	18.07	18.56
	12H	21.27	21.77	21.78	22.26	22.82	17.24	17.74	17.75	18.23	18.80
12H	4H	20.04	20.73	20.53	21.21	21.68	16.04	16.72	16.52	17.20	17.67
	6H	20.77	21.34	21.29	21.85	22.34	16.79	17.36	17.31	17.87	18.36
	8H	21.08	21.58	21.59	22.07	22.64	17.14	17.64	17.65	18.13	18.70