

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1055653

Luminaire Tested: S123R3DRP-S560D950-X4F0-XX-UDD-F-B

Issue Date: 7/25/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1055653  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2503-402-5)  
Test Lab: INNOVATION CENTER  
Issue Date: 7/25/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123R3DRP-S560D950-X4F0-XX-UDD-F-B  
Description: DEFINE 3, BLACK 3-INCH REGRESSED DIRECT RECESSED HOUSING WITH FROSTED LENS  
CORE LIGHT ENGINE  
Light Source: 5000K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 777.3 lumens  
Efficiency: N/A  
Efficacy: 40.7 lumens/watt  
Spacing Criteria (0/90/45): 1.17 / 0.7 / 0.86  
Luminous Opening: Rectangular (W 0.23' x L: 3.9' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.1  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1055653

CATALOG NUMBER: S123R3DRP-S560D950-X4F0-XX-UDD-F-B

### Luminous Intensity Polar Plot

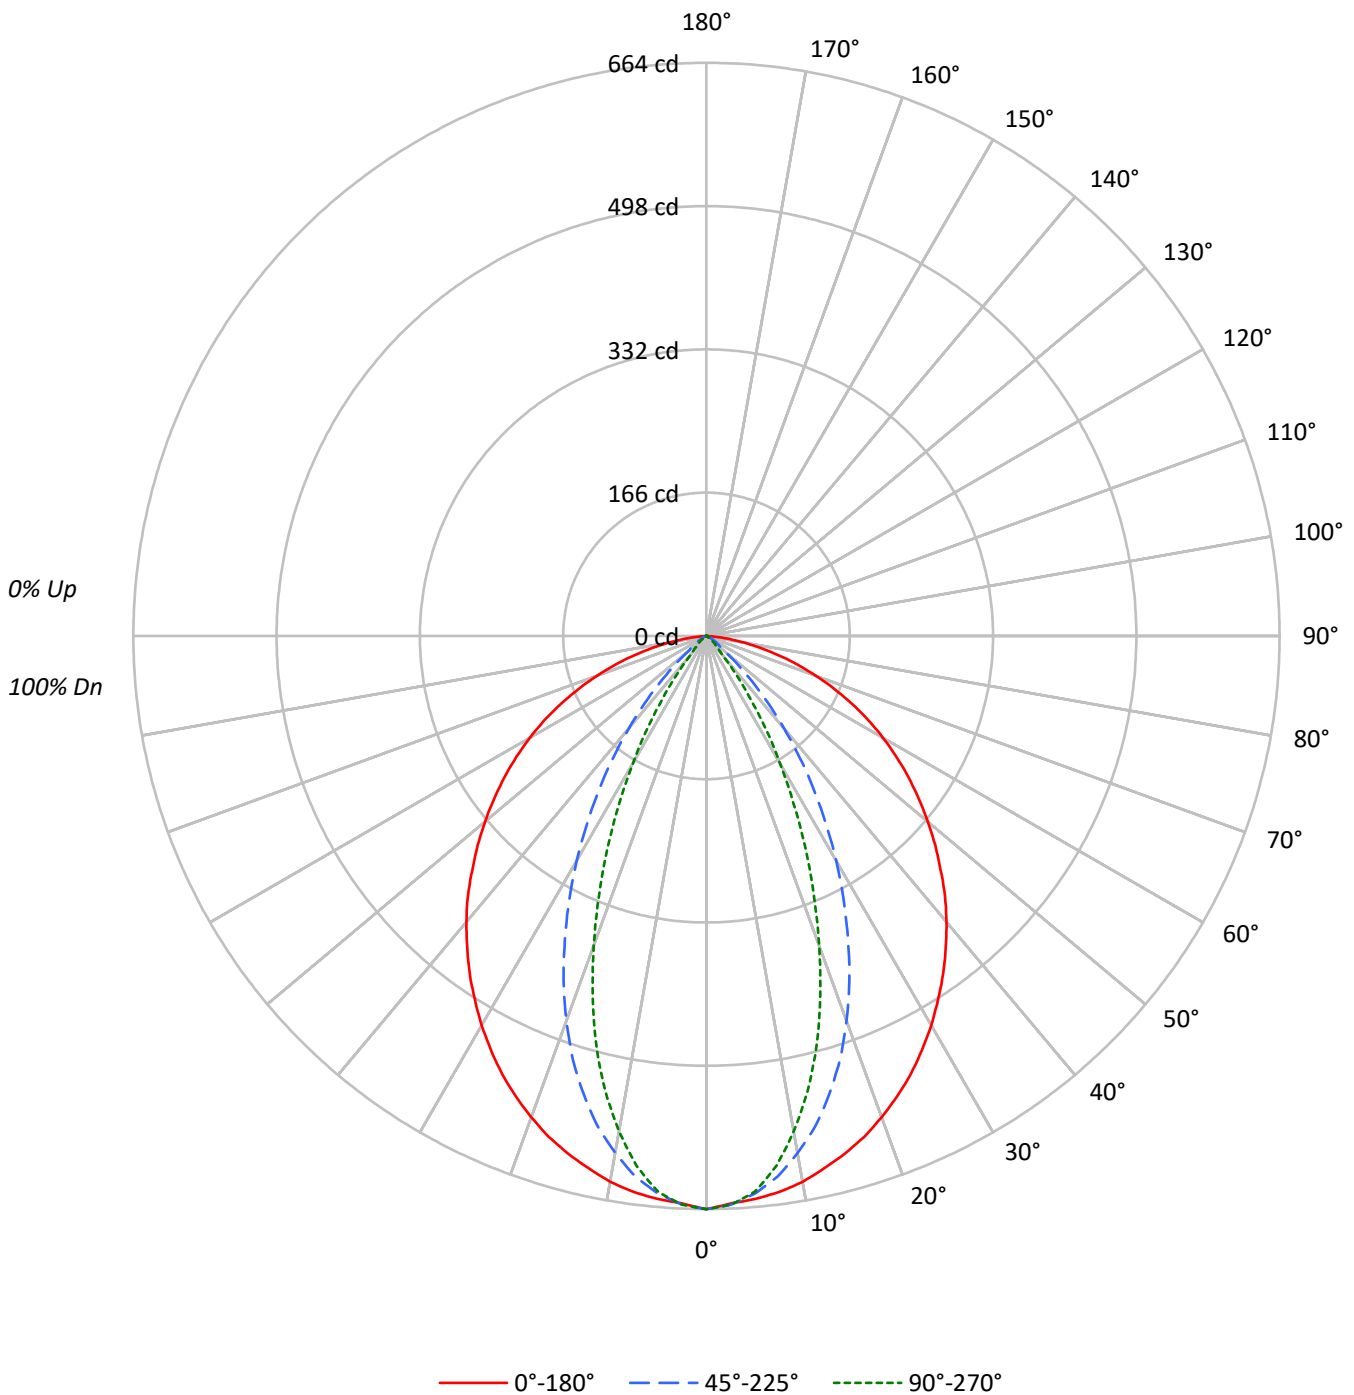



TEST NUMBER: P1055653

CATALOG NUMBER: S123R3DRP-S560D950-X4F0-XX-UDD-F-B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	103	109	106	104	101	102	100	98	98	97	95	95	93	92	90
2	105	99	94	89	102	97	92	88	93	90	86	90	87	84	87	85	83	81
3	98	90	84	79	96	88	83	78	86	81	77	83	79	76	81	77	74	73
4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	65
5	86	76	69	63	84	75	68	63	73	67	62	71	66	62	69	65	61	59
6	81	70	63	57	79	69	62	57	67	61	57	66	61	56	64	60	56	54
7	76	65	58	53	74	64	57	52	63	57	52	61	56	52	60	55	52	50
8	71	60	53	48	70	60	53	48	58	52	48	57	52	48	56	51	48	46
9	68	56	49	45	66	56	49	45	55	49	45	54	48	44	53	48	44	43
10	64	53	46	42	63	52	46	42	51	46	41	51	45	41	50	45	41	40

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	8007	8007	8007
5°	7921	7846	7821
10°	7861	7447	7135
15°	7747	6862	6148
20°	7611	6090	4897
25°	7451	5160	3610
30°	7250	4182	2369
35°	7037	3184	1298
40°	6808	2202	444
45°	6542	1280	259
50°	6280	505	156
55°	6010	319	71
60°	5698	200	34
65°	5306	97	20
70°	4759	49	25
75°	4043	33	33
80°	3013	49	0
85°	1148	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 6542 cd/sqm



TEST NUMBER: P1055653

CATALOG NUMBER: S123R3DRP-S560D950-X4F0-XX-UDD-F-B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	60.9	7.8
10°-20°	154.5	19.9
20°-30°	184.3	23.7
30°-40°	156.4	20.1
40°-50°	106.3	13.7
50°-60°	65.9	8.5
60°-70°	33.4	4.3
70°-80°	13.6	1.8
80°-90°	2.1	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	399.7	51.4
0°-40°	556.1	71.5
0°-60°	728.2	93.7
0°-90°	777.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	777.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	664	664	664	664	664	
5°	654	661	648	644	646	62
15°	621	605	550	506	493	175
25°	560	508	388	300	271	258
35°	478	384	216	116	88	299
45°	384	252	75	19	15	296
55°	286	127	15	6	3	255
65°	186	31	3	1	1	184
75°	87	6	1	1	1	92
85°	8	0	0	1	0	15
90°	0	0	0	0	0	



TEST NUMBER: P1055653

CATALOG NUMBER: S123R3DRP-S560D950-X4F0-XX-UDD-F-B

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	664.1	664.1	664.1	664.1	664.1
2.5°	657.9	666.9	659.3	658.6	659.3
5°	654.5	660.7	648.3	643.5	646.2
7.5°	649.7	652.4	631.7	619.3	619.3
10°	642.1	640.0	608.3	587.7	582.8
12.5°	631.7	623.5	582.1	549.8	540.8
15°	620.7	604.9	549.8	506.4	492.6
17.5°	608.3	584.2	514.6	458.1	438.2
20°	593.2	560.8	474.7	405.8	381.7
22.5°	577.3	535.3	432.6	352.0	325.2
25°	560.1	507.7	387.9	299.7	271.4
27.5°	540.8	478.8	343.8	249.4	218.4
30°	520.8	448.5	300.4	201.2	170.2
32.5°	499.5	416.8	257.0	157.1	128.1
35°	478.1	383.7	216.3	116.4	88.2
37.5°	455.4	350.7	177.1	80.6	55.8
40°	432.6	318.3	139.9	51.0	28.2
42.5°	409.2	284.5	106.1	25.5	19.3
45°	383.7	251.5	75.1	18.6	15.2
47.5°	359.6	219.8	49.6	15.2	11.7
50°	334.8	188.1	26.9	11.0	8.3
52.5°	310.0	157.8	19.3	8.3	5.5
55°	285.9	126.8	15.2	5.5	3.4
57.5°	261.1	99.9	11.7	3.4	2.1
60°	236.3	73.7	8.3	2.1	1.4
62.5°	211.5	51.0	5.5	1.4	0.7
65°	186.0	31.0	3.4	0.7	0.7
67.5°	159.8	21.4	2.1	0.7	0.7
70°	135.0	15.2	1.4	0.7	0.7
72.5°	110.2	9.6	0.7	0.7	0.0
75°	86.8	5.5	0.7	0.7	0.7
77.5°	64.1	2.1	0.7	0.7	0.0
80°	43.4	0.7	0.7	0.7	0.0
82.5°	24.1	0.0	0.7	0.7	0.0
85°	8.3	0.0	0.0	0.7	0.0
87.5°	0.0	0.0	0.0	0.7	0.0
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1055653  
 CATALOG NUMBER: S123R3DRP-S560D950-X4F0-XX-UDD-F-B

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	16.28	17.56	16.64	17.87	18.18	0.00	0.00	0.00	0.00	0.00
	3H	18.22	19.36	18.60	19.69	20.05	0.00	0.00	0.00	0.00	0.00
	4H	19.05	20.10	19.45	20.45	20.84	0.00	0.00	0.00	0.00	0.00
	6H	19.60	20.57	20.02	20.94	21.34	0.00	0.00	0.00	0.00	0.00
	8H	19.73	20.64	20.16	21.04	21.44	0.00	0.00	0.00	0.00	0.00
	12H	19.75	20.63	20.18	21.01	21.44	0.00	0.00	0.00	0.00	0.00
4H	2H	16.04	17.09	16.44	17.45	17.83	0.00	0.00	0.00	0.00	0.00
	3H	17.99	18.85	18.41	19.26	19.66	0.00	0.00	0.00	0.00	0.00
	4H	18.81	19.58	19.24	20.00	20.44	0.00	0.00	0.00	0.00	0.00
	6H	19.41	20.07	19.87	20.52	20.98	0.00	0.00	0.00	0.00	0.00
	8H	19.56	20.18	20.03	20.62	21.10	0.00	0.00	0.00	0.00	0.00
	12H	19.61	20.15	20.09	20.63	21.11	0.00	0.00	0.00	0.00	0.00
8H	4H	18.66	19.28	19.13	19.73	20.20	0.00	0.00	0.00	0.00	0.00
	6H	19.25	19.75	19.75	20.25	20.73	0.00	0.00	0.00	0.00	0.00
	8H	19.39	19.84	19.92	20.36	20.85	0.00	0.00	0.00	0.00	0.00
	12H	19.45	19.85	19.97	20.34	20.92	0.00	0.00	0.00	0.00	0.00
12H	4H	18.61	19.16	19.10	19.64	20.12	0.00	0.00	0.00	0.00	0.00
	6H	19.18	19.63	19.71	20.15	20.64	0.00	0.00	0.00	0.00	0.00
	8H	19.35	19.75	19.87	20.24	20.81	0.00	0.00	0.00	0.00	0.00