

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1059446

Luminaire Tested: S123RDRP-H1000D927-X4F0-XX-UDD-BVL-S

Issue Date: 8/7/2025

Test Information

Test Method: LM-79-2024
Report Number: P1059446
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-69)
Test Lab: INNOVATION CENTER
Issue Date: 8/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123RDRP-H1000D927-X4F0-XX-UDD-BVL-S
Description: DEFINE 3 SILVER REGRESSED DIRECT RECESSED HOUSING WITH BLACK STRAIGHT BLADE
LOUVER WITH DIFFUSER
HIGH PERFORMANCE LIGHT ENGINE
Light Source: 2700K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 743.2 lumens
Efficiency: N/A
Efficacy: 23.8 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 1.06 / 0.94
Luminous Opening: Rectangular (W 0.23' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 31.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1059446

CATALOG NUMBER: S123RDRP-H1000D927-X4F0-XX-UDD-BVL-S

Luminous Intensity Polar Plot

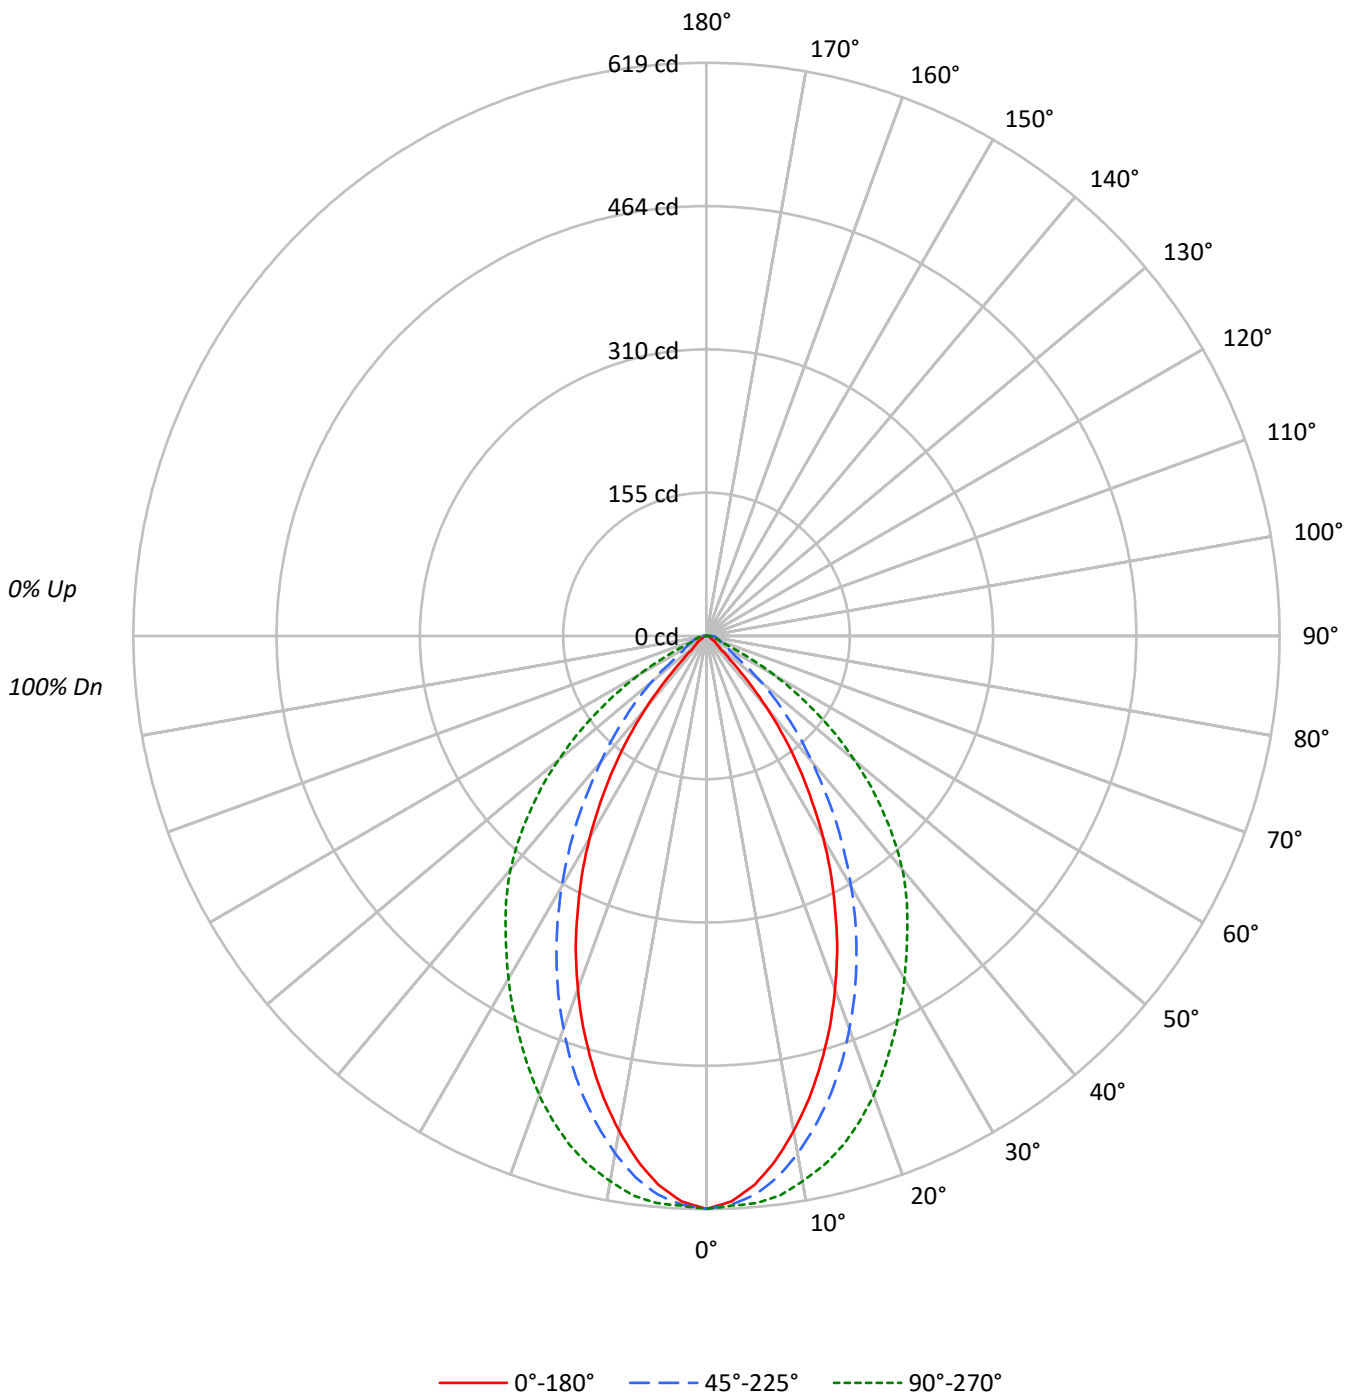



TEST NUMBER: P1059446

CATALOG NUMBER: S123RDRP-H1000D927-X4F0-XX-UDD-BVL-S

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	112	108	105	102	109	106	103	101	102	100	98	98	96	95	95	93	92					90				
2	105	99	94	89	102	97	92	88	94	90	86	90	87	85	88	85	83					81				
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75					73				
4	92	83	76	71	90	81	75	70	79	74	69	77	72	69	75	71	68					66				
5	86	76	69	64	84	75	68	64	73	67	63	71	66	62	70	65	62					60				
6	81	70	63	58	79	69	63	58	68	62	57	66	61	57	65	60	57					55				
7	76	65	58	53	75	64	58	53	63	57	53	62	56	52	61	56	52					50				
8	72	61	54	49	70	60	53	49	59	53	48	58	52	48	57	52	48					46				
9	68	57	50	45	67	56	50	45	55	49	45	54	49	45	53	48	45					43				
10	64	53	46	42	63	53	46	42	52	46	42	51	45	42	50	45	41					40				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7265	7265	7265
5°	7015	7137	7248
10°	6475	6768	7129
15°	5808	6257	6923
20°	5072	5639	6597
25°	4265	4965	6191
30°	3425	4233	5798
35°	2509	3485	5424
40°	1551	2712	5046
45°	598	2043	4494
50°	294	1399	3802
55°	233	774	2983
60°	155	643	1999
65°	131	578	895
70°	130	518	518
75°	172	558	517
80°	257	703	575
85°	377	1145	768

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 4494 cd/sqm



TEST NUMBER: P1059446

CATALOG NUMBER: S123RDRP-H1000D927-X4F0-XX-UDD-BVL-S

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	56.7	7.6
10°-20°	145.2	19.5
20°-30°	180.3	24.3
30°-40°	161.5	21.7
40°-50°	106.2	14.3
50°-60°	53.2	7.2
60°-70°	21.0	2.8
70°-80°	11.8	1.6
80°-90°	7.4	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	382.2	51.4
0°-40°	543.7	73.2
0°-60°	703.1	94.6
0°-90°	743.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	743.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	619	619	619	619	619	
5°	595	604	606	609	615	55
15°	478	493	515	550	570	133
25°	329	350	383	437	478	151
35°	175	199	243	318	378	109
45°	36	60	123	207	271	34
55°	11	13	38	102	146	10
65°	5	13	21	26	32	5
75°	4	12	12	11	11	4
85°	3	8	8	8	6	3
90°	0	0	0	0	0	



TEST NUMBER: P1059446

CATALOG NUMBER: S123RDRP-H1000D927-X4F0-XX-UDD-BVL-S

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	618.7	618.7	618.7	618.7	618.7
2.5°	611.2	619.7	614.9	614.9	615.9
5°	595.1	604.5	605.5	609.3	614.9
7.5°	571.4	583.7	589.4	600.7	609.3
10°	543.0	556.3	567.6	587.5	597.9
12.5°	511.8	525.1	542.1	569.5	585.6
15°	477.8	492.9	514.7	549.7	569.5
17.5°	442.8	457.9	484.4	524.1	549.7
20°	405.9	422.9	451.3	496.7	527.9
22.5°	369.0	387.9	418.2	467.4	503.3
25°	329.2	350.0	383.2	437.1	477.8
27.5°	291.4	313.1	348.2	406.8	453.2
30°	252.6	274.4	312.2	375.6	427.6
32.5°	212.9	237.5	277.2	346.3	402.1
35°	175.0	198.7	243.1	317.9	378.4
37.5°	138.1	161.8	208.1	290.4	354.8
40°	101.2	125.8	176.9	264.0	329.2
42.5°	66.2	91.8	149.5	237.5	300.8
45°	36.0	59.6	123.0	207.2	270.6
47.5°	19.9	32.2	99.3	178.8	241.2
50°	16.1	18.0	76.6	152.3	208.1
52.5°	13.2	15.1	54.9	126.8	177.9
55°	11.4	13.2	37.8	102.2	145.7
57.5°	9.5	11.4	30.3	78.5	114.5
60°	6.6	11.4	27.4	57.7	85.1
62.5°	5.7	11.4	23.7	39.7	56.8
65°	4.7	13.2	20.8	26.5	32.2
67.5°	3.8	13.2	18.0	17.0	17.0
70°	3.8	13.2	15.1	14.2	15.1
72.5°	3.8	14.2	14.2	13.2	13.2
75°	3.8	12.3	12.3	11.4	11.4
77.5°	3.8	11.4	11.4	10.4	10.4
80°	3.8	10.4	10.4	9.5	8.5
82.5°	3.8	9.5	9.5	8.5	7.6
85°	2.8	8.5	8.5	8.5	5.7
87.5°	2.8	7.6	8.5	7.6	4.7
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1059446

CATALOG NUMBER: S123RDRP-H1000D927-X4F0-XX-UDD-BVL-S

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.63	0.00	0.95	1.26	13.44	14.69	13.80	15.00	15.32
	3H	1.88	2.99	2.26	3.32	3.69	13.51	14.63	13.89	14.96	15.32
	4H	3.05	4.08	3.45	4.43	4.82	13.58	14.61	13.98	14.96	15.35
	6H	4.10	5.05	4.52	5.42	5.82	13.68	14.63	14.09	15.00	15.39
	8H	4.64	5.54	5.07	5.93	6.34	13.74	14.64	14.17	15.03	15.43
	12H	5.12	5.98	5.55	6.36	6.79	13.81	14.67	14.24	15.05	15.48
4H	2H	2.62	3.65	3.02	4.00	4.39	13.30	14.33	13.70	14.68	15.07
	3H	5.07	5.92	5.48	6.32	6.72	13.47	14.31	13.88	14.72	15.12
	4H	6.42	7.17	6.85	7.59	8.04	13.60	14.35	14.03	14.77	15.22
	6H	7.55	8.21	8.02	8.66	9.12	13.81	14.47	14.28	14.91	15.38
	8H	8.07	8.68	8.54	9.13	9.60	13.94	14.55	14.41	15.00	15.47
	12H	8.52	9.06	9.01	9.54	10.02	14.10	14.64	14.59	15.12	15.60
8H	4H	7.34	7.95	7.81	8.40	8.87	13.60	14.21	14.07	14.66	15.13
	6H	8.94	9.44	9.44	9.94	10.42	13.93	14.43	14.44	14.93	15.41
	8H	9.77	10.22	10.29	10.74	11.23	14.16	14.61	14.68	15.13	15.62
	12H	10.54	10.94	11.06	11.44	12.01	14.49	14.89	15.00	15.38	15.95
12H	4H	7.51	8.04	7.99	8.53	9.00	13.59	14.13	14.08	14.61	15.09
	6H	9.26	9.71	9.78	10.22	10.72	13.96	14.41	14.49	14.93	15.42
	8H	10.27	10.67	10.78	11.16	11.74	14.27	14.67	14.79	15.17	15.74