

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1059614

Luminaire Tested: S123RDRP-H340D927-X4F0-XX-UDD-WVL-S

Issue Date: 8/7/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1059614  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-67 )  
Test Lab: INNOVATION CENTER  
Issue Date: 8/7/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123RDRP-H340D927-X4F0-XX-UDD-WVL-S  
Description: DEFINE 3 SILVER REGRESSED DIRECT RECESSED HOUSING WITH WHITE STRAIGHT BLADE  
LOUVER WITH DIFFUSER  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 2700K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 506.5 lumens  
Efficiency: N/A  
Efficacy: 43.3 lumens/watt  
Spacing Criteria (0/90/45): 0.93 / 1.12 / 1.1  
Luminous Opening: Rectangular (W 0.23' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 11.7  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1059614

CATALOG NUMBER: S123RDRP-H340D927-X4F0-XX-UDD-WVL-S

### Luminous Intensity Polar Plot

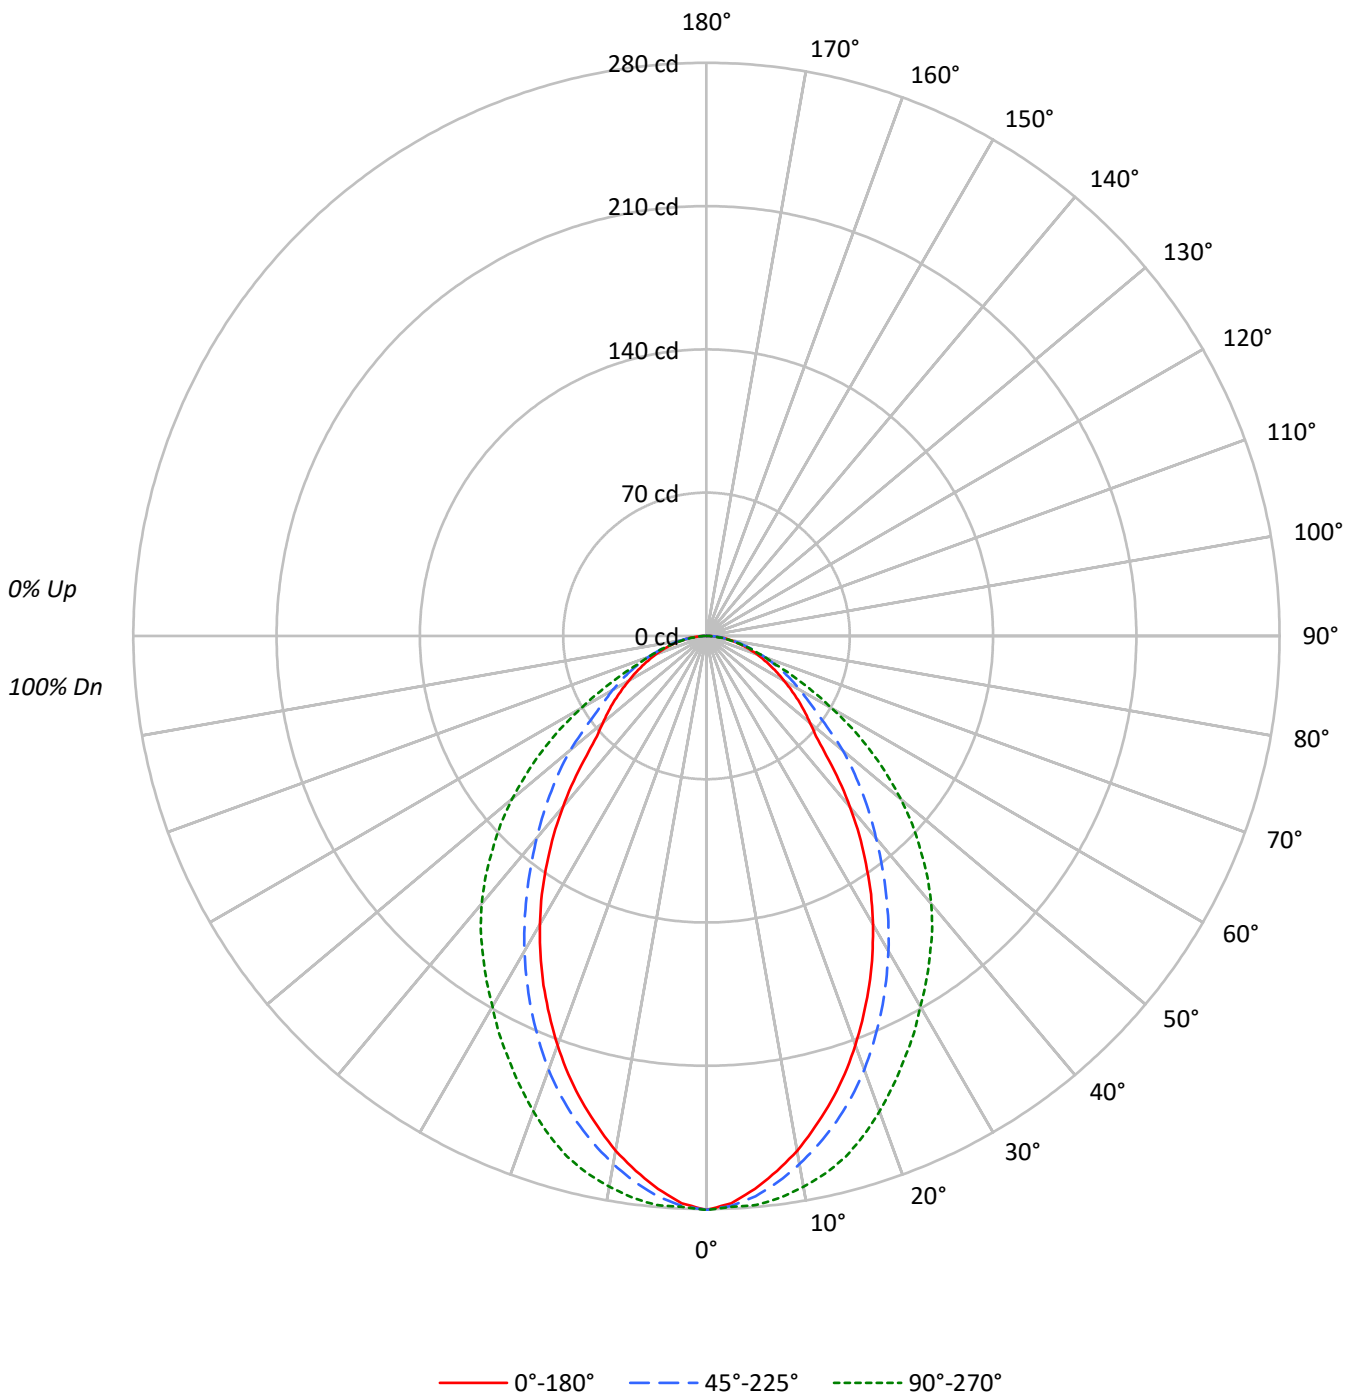



TEST NUMBER: P1059614

CATALOG NUMBER: S123RDRP-H340D927-X4F0-XX-UDD-WVL-S

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87
2	102	94	88	83	99	92	87	82	89	84	80	86	82	78	83	80	77	75
3	94	84	77	71	91	83	76	71	80	74	69	77	72	68	75	71	67	65
4	87	76	68	62	84	74	67	61	72	66	61	70	64	60	68	63	59	57
5	80	69	60	54	78	68	60	54	66	59	54	64	58	53	62	57	53	51
6	75	63	54	48	73	62	54	48	60	53	48	58	52	47	57	51	47	45
7	70	57	49	44	68	56	49	43	55	48	43	54	47	43	52	47	43	41
8	65	53	45	39	64	52	45	39	51	44	39	50	43	39	48	43	39	37
9	61	49	41	36	60	48	41	36	47	40	36	46	40	36	45	39	35	34
10	58	45	38	33	56	45	38	33	44	37	33	43	37	33	42	37	33	31

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3293	3293	3293
5°	3197	3239	3290
10°	3045	3124	3258
15°	2862	2984	3201
20°	2658	2818	3089
25°	2440	2620	2959
30°	2206	2411	2835
35°	1947	2190	2728
40°	1672	1976	2620
45°	1375	1780	2456
50°	1208	1586	2263
55°	1118	1353	2006
60°	1026	1242	1660
65°	959	1142	1306
70°	903	1037	1037
75°	848	953	894
80°	798	866	757
85°	754	835	579

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 2456 cd/sqm



TEST NUMBER: P1059614

CATALOG NUMBER: S123RDRP-H340D927-X4F0-XX-UDD-WVL-S

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	25.9	5.1
10°-20°	69.5	13.7
20°-30°	94.2	18.6
30°-40°	98.5	19.5
40°-50°	85.5	16.9
50°-60°	63.6	12.6
60°-70°	40.8	8.1
70°-80°	21.9	4.3
80°-90°	6.6	1.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	189.7	37.4
0°-40°	288.2	56.9
0°-60°	437.2	86.3
0°-90°	506.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	506.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	280	280	280	280	280	
5°	271	276	275	277	279	25
15°	235	241	246	255	263	66
25°	188	194	202	216	228	86
35°	136	142	153	172	190	85
45°	83	89	107	130	148	65
55°	55	56	66	85	98	49
65°	34	38	41	44	47	34
75°	19	22	21	20	20	20
85°	6	7	6	5	4	6
90°	0	0	0	0	0	



TEST NUMBER: P1059614

CATALOG NUMBER: S123RDRP-H340D927-X4F0-XX-UDD-WVL-S

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	280.4	280.4	280.4	280.4	280.4
2.5°	277.4	281.4	278.7	278.7	279.1
5°	271.2	275.8	274.8	276.8	279.1
7.5°	263.6	268.5	268.9	273.5	276.8
10°	255.4	260.3	262.0	268.5	273.2
12.5°	245.5	251.1	254.1	262.3	268.9
15°	235.4	240.9	245.5	255.4	263.3
17.5°	224.5	230.1	236.0	247.2	255.7
20°	212.7	218.6	225.5	236.7	247.2
22.5°	200.5	206.8	214.0	226.1	238.0
25°	188.3	194.3	202.2	215.6	228.4
27.5°	175.5	181.8	190.0	204.8	219.2
30°	162.7	169.0	177.8	193.6	209.1
32.5°	149.6	155.8	165.3	183.1	199.9
35°	135.8	142.3	152.8	172.2	190.3
37.5°	122.6	128.9	140.7	162.0	181.1
40°	109.1	115.7	128.9	151.9	170.9
42.5°	96.0	102.6	118.0	141.0	159.7
45°	82.8	89.1	107.2	130.2	147.9
47.5°	72.6	77.2	97.0	118.7	136.4
50°	66.1	67.7	86.8	107.5	123.9
52.5°	60.2	61.5	75.6	96.3	111.1
55°	54.6	55.9	66.1	84.8	98.0
57.5°	49.0	50.6	58.8	73.0	84.8
60°	43.7	45.7	52.9	62.5	70.7
62.5°	39.1	41.4	47.0	52.9	58.5
65°	34.5	37.5	41.1	43.7	47.0
67.5°	30.2	33.5	35.5	36.2	36.5
70°	26.3	29.6	30.2	30.2	30.2
72.5°	22.4	26.0	25.3	25.0	24.7
75°	18.7	21.7	21.0	20.1	19.7
77.5°	15.1	17.7	16.8	16.1	15.1
80°	11.8	13.8	12.8	12.2	11.2
82.5°	8.9	10.2	9.2	8.5	7.6
85°	5.6	6.9	6.2	5.3	4.3
87.5°	3.0	3.9	3.3	3.0	1.6
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1059614  
 CATALOG NUMBER: S123RDRP-H340D927-X4F0-XX-UDD-WVL-S

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.92	12.41	11.29	12.72	13.03	13.68	15.17	14.05	15.48	15.80
	3H	12.63	13.96	13.01	14.29	14.65	14.70	16.03	15.08	16.36	16.72
	4H	13.29	14.54	13.69	14.89	15.27	15.07	16.32	15.47	16.66	17.04
	6H	13.79	14.94	14.21	15.31	15.70	15.32	16.47	15.74	16.84	17.23
	8H	13.97	15.07	14.40	15.46	15.86	15.40	16.49	15.82	16.88	17.28
	12H	14.10	15.15	14.53	15.53	15.96	15.43	16.48	15.86	16.86	17.29
4H	2H	11.70	12.95	12.10	13.30	13.67	13.96	15.20	14.36	15.55	15.93
	3H	13.63	14.66	14.04	15.06	15.46	15.21	16.24	15.62	16.64	17.04
	4H	14.44	15.37	14.87	15.78	16.22	15.70	16.63	16.13	17.04	17.48
	6H	15.07	15.88	15.53	16.33	16.79	16.08	16.89	16.54	17.33	17.79
	8H	15.30	16.06	15.77	16.50	16.97	16.19	16.94	16.65	17.39	17.86
	12H	15.48	16.15	15.96	16.63	17.10	16.26	16.94	16.74	17.41	17.89
8H	4H	14.76	15.51	15.22	15.96	16.42	15.89	16.64	16.35	17.09	17.56
	6H	15.55	16.17	16.04	16.66	17.14	16.38	17.00	16.87	17.49	17.97
	8H	15.87	16.44	16.39	16.95	17.43	16.55	17.11	17.07	17.62	18.11
	12H	16.15	16.65	16.66	17.14	17.71	16.69	17.18	17.20	17.67	18.24
12H	4H	14.78	15.45	15.26	15.93	16.40	15.90	16.58	16.39	17.06	17.53
	6H	15.60	16.16	16.12	16.67	17.16	16.41	16.97	16.93	17.48	17.97
	8H	16.00	16.49	16.51	16.98	17.55	16.64	17.14	17.15	17.63	18.20