

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1059575

Luminaire Tested: S123RDRP-H340D830-X4F0-XX-UDD-SVL-S

Issue Date: 8/7/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1059575  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-68)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/7/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123RDRP-H340D830-X4F0-XX-UDD-SVL-S  
Description: DEFINE 3 SILVER REGRESSED DIRECT RECESSED HOUSING WITH SILVER STRAIGHT BLADE LOUVER WITH DIFFUSER  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 3000K CCT, 80 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 359.0 lumens  
Efficiency: N/A  
Efficacy: 30.7 lumens/watt  
Spacing Criteria (0/90/45): 0.83 / 1.07 / 0.98  
Luminous Opening: Rectangular (W 0.23' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 11.7  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1059575

CATALOG NUMBER: S123RDRP-H340D830-X4F0-XX-UDD-SVL-S

### Luminous Intensity Polar Plot

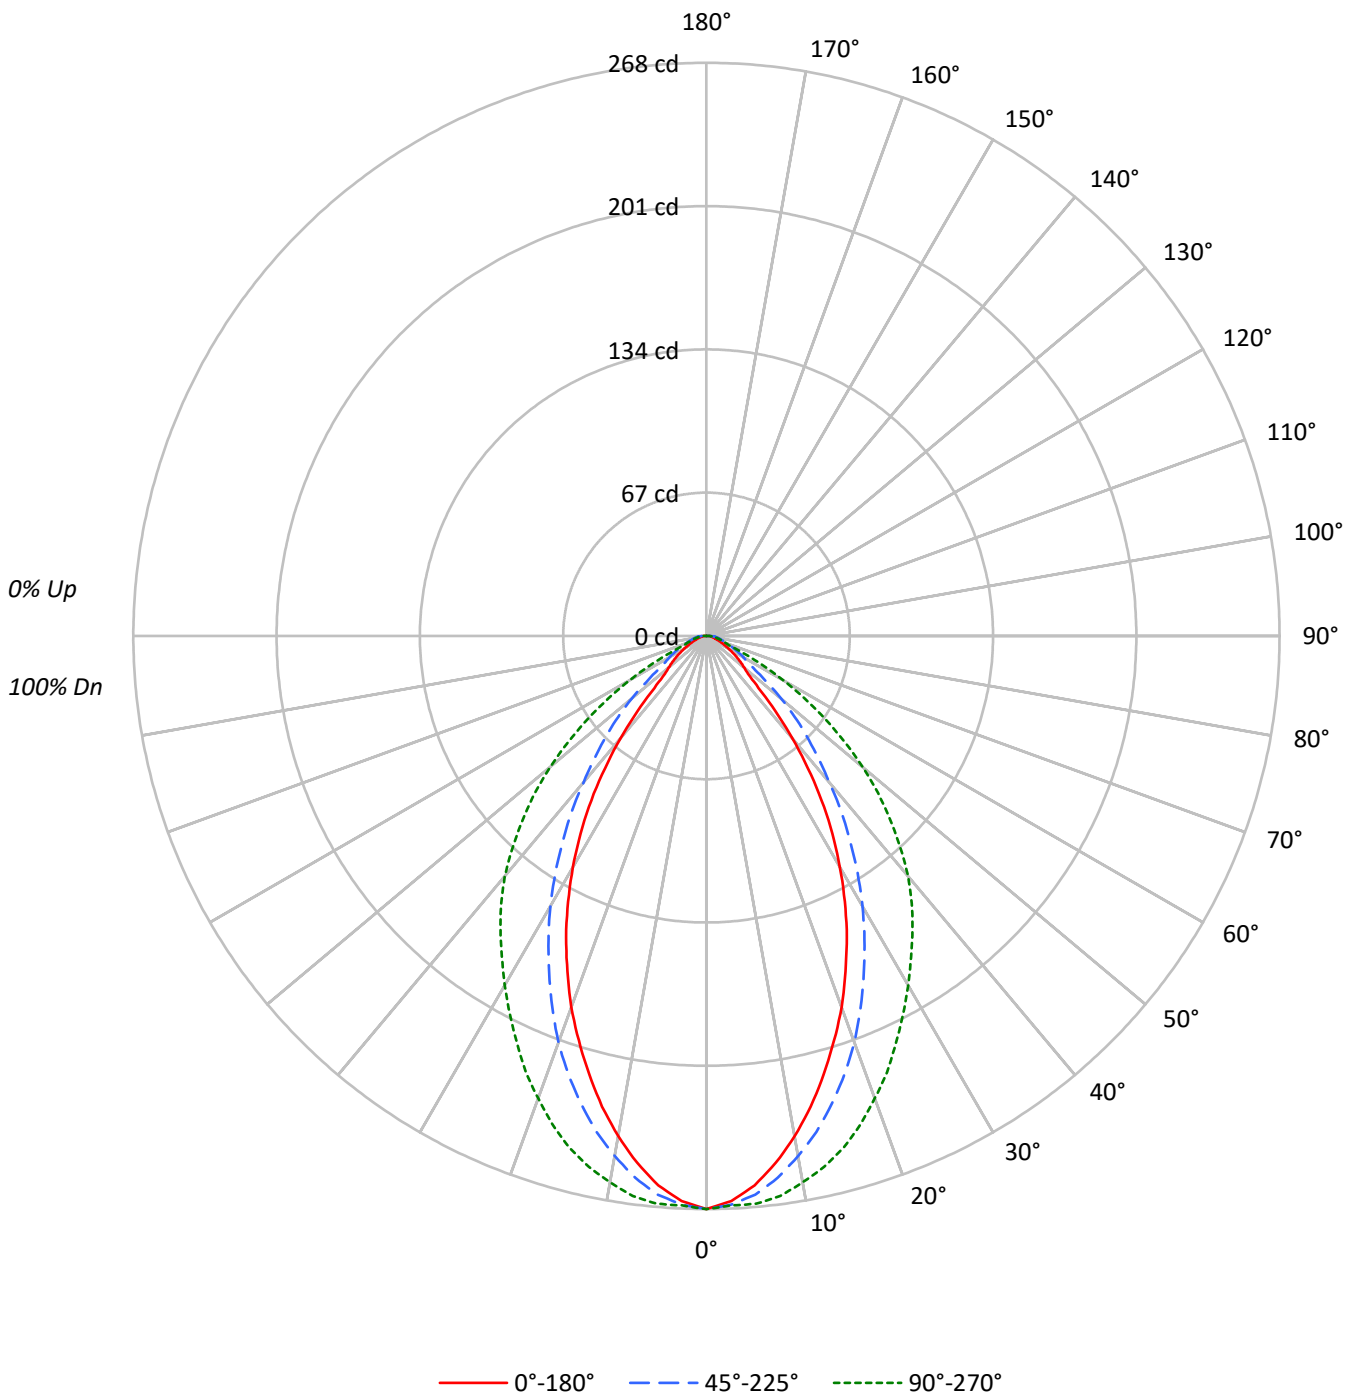



TEST NUMBER: P1059575

CATALOG NUMBER: S123RDRP-H340D830-X4F0-XX-UDD-SVL-S

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	111	108	105	102	109	106	103	100	101	99	97	98	96	94	94	93	91	89					89			
2	104	98	92	88	102	96	91	87	92	88	85	89	86	83	86	84	81	79					79			
3	97	89	82	77	95	87	81	77	84	79	75	82	78	74	79	76	73	71					71			
4	91	81	74	69	88	80	73	68	77	72	67	75	70	66	73	69	66	64					64			
5	85	74	67	61	83	73	66	61	71	65	61	69	64	60	68	63	59	58					58			
6	79	68	61	56	78	67	60	55	66	60	55	64	59	54	63	58	54	52					52			
7	74	63	56	51	73	62	55	50	61	55	50	60	54	50	58	53	49	48					48			
8	70	58	51	46	69	58	51	46	57	50	46	56	50	46	54	49	45	44					44			
9	66	54	47	43	65	54	47	43	53	47	42	52	46	42	51	46	42	40					40			
10	62	51	44	39	61	50	44	39	50	43	39	49	43	39	48	43	39	37					37			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3147	3147	3147
5°	3040	3091	3141
10°	2832	2944	3093
15°	2578	2753	3011
20°	2308	2528	2875
25°	2012	2256	2717
30°	1692	1978	2557
35°	1346	1677	2407
40°	960	1367	2249
45°	571	1098	2014
50°	422	837	1745
55°	352	569	1386
60°	284	470	975
65°	228	403	522
70°	189	350	323
75°	177	336	304
80°	183	372	291
85°	269	525	364

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 2014 cd/sqm



TEST NUMBER: P1059575

CATALOG NUMBER: S123RDRP-H340D830-X4F0-XX-UDD-SVL-S

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	24.6	6.9
10°-20°	64.0	17.8
20°-30°	81.6	22.7
30°-40°	76.8	21.4
40°-50°	55.1	15.4
50°-60°	31.6	8.8
60°-70°	14.5	4.0
70°-80°	7.3	2.0
80°-90°	3.5	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	170.2	47.4
0°-40°	246.9	68.8
0°-60°	333.7	93.0
0°-90°	359.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	359.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	268	268	268	268	268	
5°	258	263	262	264	266	24
15°	212	220	226	239	248	59
25°	155	162	174	193	210	71
35°	94	101	117	144	168	58
45°	34	42	66	97	121	29
55°	17	18	28	51	68	15
65°	8	11	14	16	19	8
75°	4	8	7	7	7	4
85°	2	4	4	4	3	2
90°	0	0	0	0	0	



TEST NUMBER: P1059575

CATALOG NUMBER: S123RDRP-H340D830-X4F0-XX-UDD-SVL-S

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	268.0	268.0	268.0	268.0	268.0
2.5°	264.5	268.4	266.1	266.1	266.5
5°	257.9	262.9	262.2	264.1	266.5
7.5°	248.5	253.9	255.5	260.2	264.1
10°	237.5	243.8	246.9	254.3	259.4
12.5°	225.4	232.4	237.5	246.9	254.3
15°	212.1	219.5	226.5	238.7	247.7
17.5°	198.4	205.8	214.8	228.9	239.5
20°	184.7	192.1	202.3	217.2	230.1
22.5°	169.8	177.2	188.2	205.0	220.7
25°	155.3	162.4	174.1	192.9	209.7
27.5°	140.1	147.1	160.0	180.4	199.2
30°	124.8	131.9	145.9	167.9	188.6
32.5°	109.6	116.2	131.5	155.7	178.0
35°	93.9	100.6	117.0	143.6	167.9
37.5°	77.9	84.5	103.7	132.6	157.7
40°	62.6	70.0	89.2	121.7	146.7
42.5°	47.7	55.6	77.5	109.9	134.2
45°	34.4	41.9	66.1	97.4	121.3
47.5°	26.2	30.1	56.0	84.9	108.8
50°	23.1	23.5	45.8	73.6	95.5
52.5°	20.0	20.3	35.6	62.6	81.4
55°	17.2	17.6	27.8	51.3	67.7
57.5°	14.5	15.3	22.7	40.7	54.4
60°	12.1	13.7	20.0	30.9	41.5
62.5°	9.8	12.5	17.2	22.7	29.7
65°	8.2	11.3	14.5	16.0	18.8
67.5°	6.7	10.6	12.1	11.3	11.3
70°	5.5	9.4	10.2	9.4	9.4
72.5°	4.7	9.0	8.6	7.8	7.8
75°	3.9	7.8	7.4	6.7	6.7
77.5°	3.5	6.7	6.3	5.9	5.5
80°	2.7	5.5	5.5	5.1	4.3
82.5°	2.3	4.7	4.7	4.3	3.5
85°	2.0	3.9	3.9	3.5	2.7
87.5°	1.6	3.5	3.5	3.1	2.0
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1059575  
 CATALOG NUMBER: S123RDRP-H340D830-X4F0-XX-UDD-SVL-S

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	3.98	5.30	4.35	5.61	5.93	11.19	12.51	11.56	12.82	13.14
	3H	5.39	6.56	5.77	6.89	7.25	11.43	12.60	11.81	12.93	13.29
	4H	5.94	7.03	6.35	7.38	7.77	11.53	12.62	11.94	12.98	13.36
	6H	6.40	7.40	6.81	7.77	8.16	11.64	12.64	12.06	13.01	13.41
	8H	6.58	7.53	7.01	7.92	8.32	11.69	12.64	12.12	13.03	13.43
	12H	6.77	7.68	7.20	8.06	8.49	11.74	12.65	12.17	13.03	13.46
4H	2H	5.06	6.15	5.46	6.50	6.88	11.15	12.24	11.56	12.59	12.98
	3H	6.75	7.64	7.16	8.04	8.45	11.52	12.41	11.93	12.82	13.22
	4H	7.57	8.37	8.01	8.79	9.23	11.71	12.51	12.14	12.92	13.37
	6H	8.23	8.92	8.69	9.37	9.83	11.93	12.62	12.39	13.07	13.53
	8H	8.48	9.13	8.95	9.57	10.04	12.03	12.68	12.50	13.12	13.59
	12H	8.74	9.31	9.22	9.79	10.27	12.14	12.72	12.63	13.20	13.67
8H	4H	8.01	8.65	8.48	9.10	9.57	11.75	12.40	12.22	12.84	13.32
	6H	8.96	9.49	9.46	9.99	10.47	12.09	12.62	12.59	13.11	13.59
	8H	9.42	9.90	9.94	10.41	10.91	12.27	12.75	12.80	13.27	13.76
	12H	9.90	10.32	10.42	10.82	11.39	12.50	12.93	13.02	13.42	13.99
12H	4H	8.07	8.64	8.56	9.12	9.60	11.75	12.32	12.23	12.80	13.27
	6H	9.11	9.59	9.63	10.10	10.59	12.11	12.59	12.63	13.11	13.60
	8H	9.70	10.12	10.21	10.62	11.19	12.37	12.79	12.89	13.29	13.86