

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1059539

Luminaire Tested: S123RDRP-H1165D930-X4F0-XX-UDD-SVL-S

Issue Date: 8/7/2025

Test Information

Test Method: LM-79-2024
Report Number: P1059539
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-68)
Test Lab: INNOVATION CENTER
Issue Date: 8/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123RDRP-H1165D930-X4F0-XX-UDD-SVL-S
Description: DEFINE 3 SILVER REGRESSED DIRECT RECESSED HOUSING WITH SILVER STRAIGHT BLADE
LOUVER WITH DIFFUSER
HIGH PERFORMANCE LIGHT ENGINE
Light Source: 3000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1043.3 lumens
Efficiency: N/A
Efficacy: 28.6 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 1.07 / 0.98
Luminous Opening: Rectangular (W 0.23' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 36.5
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1059539

CATALOG NUMBER: S123RDRP-H1165D930-X4F0-XX-UDD-SVL-S

Luminous Intensity Polar Plot

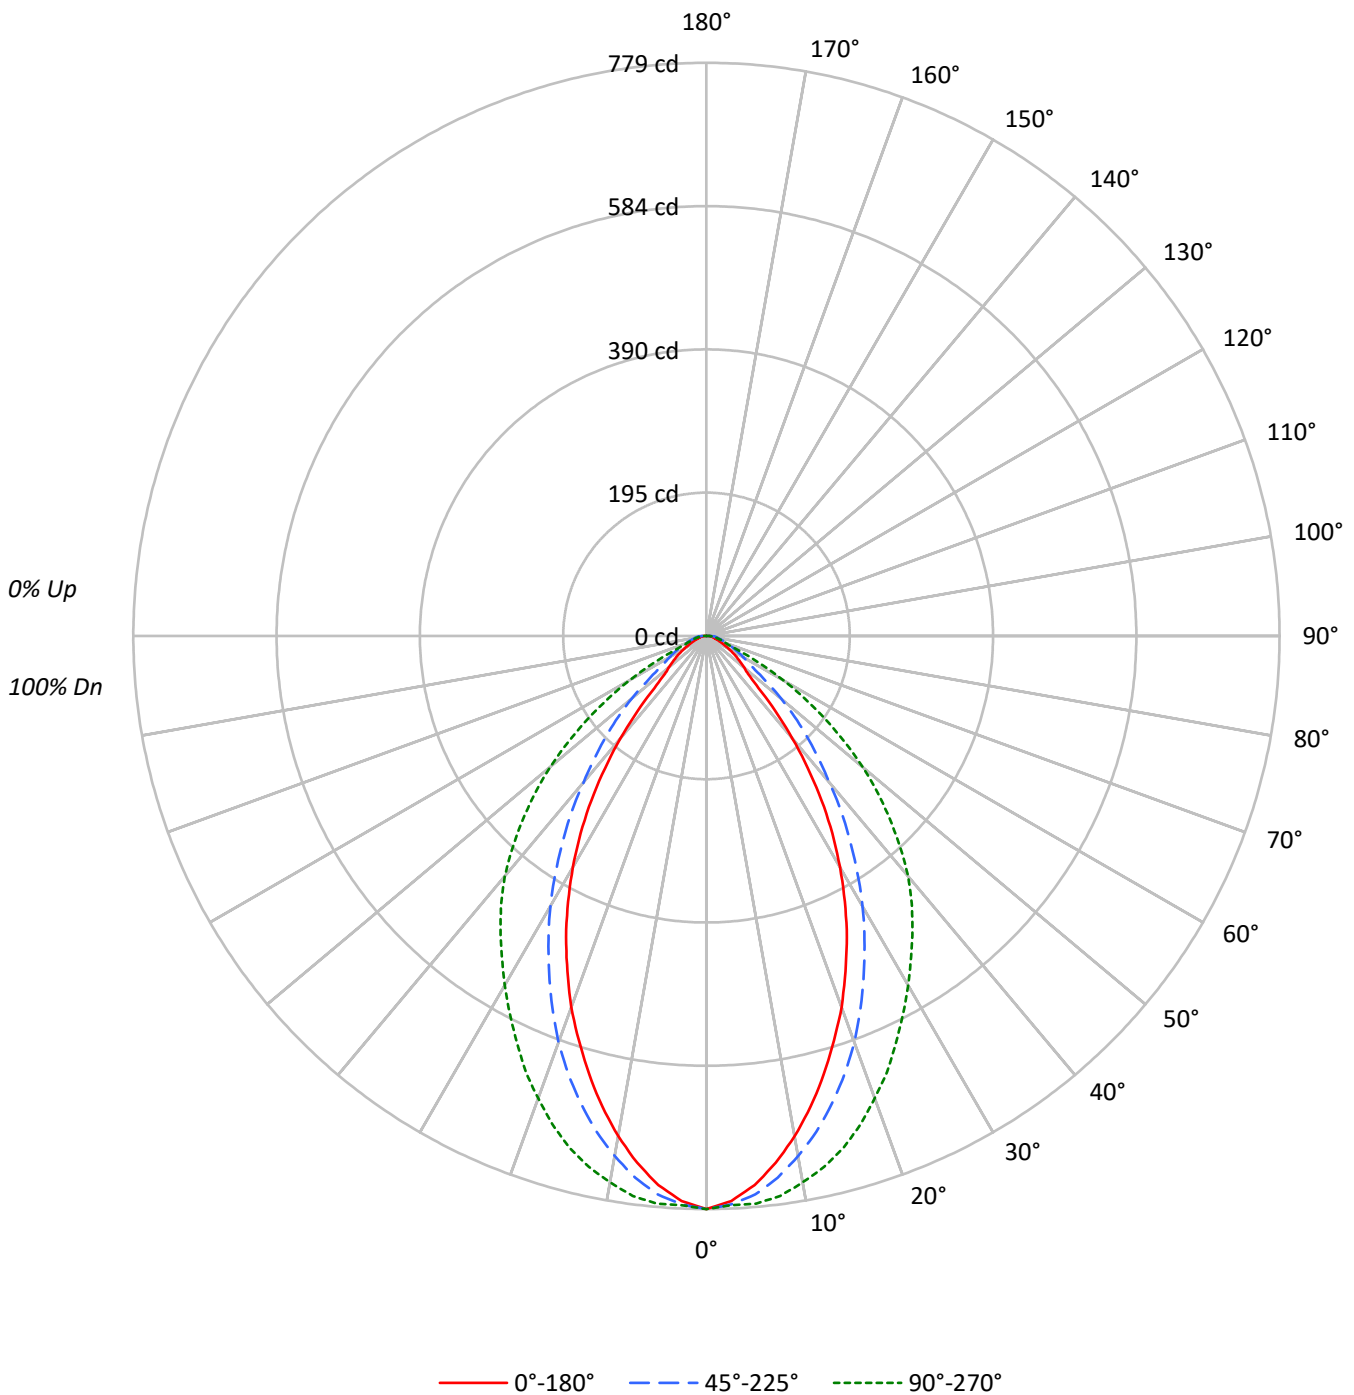

TEST NUMBER: P1059539

CATALOG NUMBER: S123RDRP-H1165D930-X4F0-XX-UDD-SVL-S

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	111	108	105	102	109	106	103	100	101	99	97	98	96	94	94	93	91	89					89			
2	104	98	92	88	102	96	91	87	92	88	85	89	86	83	86	84	81	79					79			
3	97	89	82	77	95	87	81	77	84	79	75	82	78	74	79	76	73	71					71			
4	91	81	74	69	88	80	73	68	77	72	67	75	70	66	73	69	66	64					64			
5	85	74	67	61	83	73	66	61	71	65	61	69	64	60	68	63	59	58					58			
6	79	68	61	56	78	67	60	55	66	60	55	64	59	54	63	58	54	52					52			
7	74	63	56	51	73	62	55	50	61	55	50	60	54	50	58	53	49	48					48			
8	70	58	51	46	69	58	51	46	57	50	46	56	50	46	54	49	45	44					44			
9	66	54	47	43	65	54	47	43	53	47	42	52	46	42	51	46	42	40					40			
10	62	51	44	39	61	50	44	39	50	43	39	49	43	39	48	43	39	37					37			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	9147	9147	9147
5°	8833	8981	9128
10°	8231	8556	8990
15°	7493	8004	8750
20°	6708	7346	8356
25°	5850	6557	7897
30°	4919	5752	7432
35°	3912	4874	6994
40°	2790	3975	6536
45°	1662	3192	5854
50°	1226	2431	5069
55°	1024	1652	4027
60°	829	1362	2830
65°	664	1170	1517
70°	546	1016	937
75°	517	980	876
80°	541	1075	845
85°	768	1536	1078

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 5854 cd/sqm



TEST NUMBER: P1059539

CATALOG NUMBER: S123RDRP-H1165D930-X4F0-XX-UDD-SVL-S

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	71.6	6.9
10°-20°	185.9	17.8
20°-30°	237.1	22.7
30°-40°	223.1	21.4
40°-50°	160.3	15.4
50°-60°	91.9	8.8
60°-70°	42.0	4.0
70°-80°	21.1	2.0
80°-90°	10.3	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	494.6	47.4
0°-40°	717.6	68.8
0°-60°	969.8	93.0
0°-90°	1043.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1043.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	779	779	779	779	779	
5°	749	764	762	768	774	70
15°	616	638	658	694	720	172
25°	452	472	506	561	610	206
35°	273	292	340	417	488	169
45°	100	122	192	283	352	84
55°	50	51	81	149	197	45
65°	24	33	42	47	55	24
75°	11	23	22	19	19	12
85°	6	11	11	10	8	6
90°	0	0	0	0	0	



TEST NUMBER: P1059539

CATALOG NUMBER: S123RDRP-H1165D930-X4F0-XX-UDD-SVL-S

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	779.0	779.0	779.0	779.0	779.0
2.5°	768.7	780.1	773.3	773.3	774.4
5°	749.4	764.2	761.9	767.6	774.4
7.5°	722.1	738.0	742.6	756.2	767.6
10°	690.3	708.5	717.6	739.2	754.0
12.5°	655.0	675.5	690.3	717.6	739.2
15°	616.4	638.0	658.4	693.7	719.8
17.5°	576.6	598.2	624.3	665.3	696.0
20°	536.8	558.4	587.9	631.1	668.7
22.5°	493.5	515.2	547.0	595.9	641.4
25°	451.5	471.9	506.1	560.6	609.5
27.5°	407.1	427.6	465.1	524.2	578.8
30°	362.8	383.2	424.2	487.9	548.1
32.5°	318.4	337.7	382.1	452.6	517.4
35°	272.9	292.3	340.0	417.4	487.9
37.5°	226.3	245.6	301.4	385.5	458.3
40°	182.0	203.6	259.3	353.7	426.4
42.5°	138.7	161.5	225.2	319.6	390.1
45°	100.1	121.7	192.2	283.2	352.5
47.5°	76.2	87.6	162.6	246.8	316.1
50°	67.1	68.2	133.1	213.8	277.5
52.5°	58.0	59.1	103.5	182.0	236.5
55°	50.0	51.2	80.7	149.0	196.7
57.5°	42.1	44.4	66.0	118.3	158.1
60°	35.3	39.8	58.0	89.8	120.5
62.5°	28.4	36.4	50.0	66.0	86.4
65°	23.9	33.0	42.1	46.6	54.6
67.5°	19.3	30.7	35.3	33.0	33.0
70°	15.9	27.3	29.6	27.3	27.3
72.5°	13.6	26.2	25.0	22.7	22.7
75°	11.4	22.7	21.6	19.3	19.3
77.5°	10.2	19.3	18.2	17.1	15.9
80°	8.0	15.9	15.9	14.8	12.5
82.5°	6.8	13.6	13.6	12.5	10.2
85°	5.7	11.4	11.4	10.2	8.0
87.5°	4.5	10.2	10.2	9.1	5.7
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1059539
 CATALOG NUMBER: S123RDRP-H1165D930-X4F0-XX-UDD-SVL-S

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.68	9.00	8.05	9.31	9.63	14.90	16.22	15.26	16.53	16.84
	3H	9.08	10.25	9.46	10.58	10.94	15.14	16.30	15.52	16.63	17.00
	4H	9.64	10.73	10.04	11.08	11.46	15.24	16.33	15.64	16.68	17.07
	6H	10.10	11.10	10.51	11.47	11.86	15.35	16.35	15.76	16.72	17.11
	8H	10.28	11.23	10.71	11.62	12.03	15.40	16.35	15.83	16.74	17.14
	12H	10.47	11.38	10.91	11.76	12.19	15.45	16.35	15.88	16.74	17.17
4H	2H	8.75	9.84	9.16	10.19	10.58	14.86	15.95	15.26	16.30	16.68
	3H	10.44	11.33	10.85	11.74	12.14	15.23	16.12	15.64	16.53	16.93
	4H	11.27	12.07	11.71	12.49	12.93	15.41	16.21	15.85	16.63	17.07
	6H	11.93	12.62	12.39	13.07	13.53	15.63	16.33	16.10	16.77	17.24
	8H	12.18	12.83	12.65	13.28	13.75	15.73	16.38	16.20	16.83	17.30
	12H	12.44	13.01	12.92	13.49	13.97	15.85	16.42	16.34	16.91	17.38
8H	4H	11.71	12.35	12.18	12.80	13.27	15.46	16.10	15.93	16.55	17.02
	6H	12.66	13.19	13.16	13.68	14.16	15.79	16.32	16.29	16.82	17.30
	8H	13.12	13.60	13.64	14.11	14.60	15.98	16.46	16.50	16.97	17.46
	12H	13.60	14.02	14.11	14.52	15.09	16.21	16.63	16.73	17.13	17.70
12H	4H	11.77	12.34	12.25	12.82	13.30	15.45	16.02	15.94	16.50	16.98
	6H	12.80	13.28	13.33	13.80	14.29	15.82	16.29	16.34	16.81	17.30
	8H	13.39	13.82	13.91	14.31	14.88	16.07	16.50	16.59	16.99	17.56