

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1059540

Luminaire Tested: S123RDRP-H1165D930-X4F0-XX-UDD-SVL-W

Issue Date: 8/7/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1059540  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-65)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/7/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123RDRP-H1165D930-X4F0-XX-UDD-SVL-W  
Description: DEFINE 3 WHITE REGRESSED DIRECT RECESSED HOUSING WITH SILVER STRAIGHT BLADE LOUVER WITH DIFFUSER  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 3000K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1229.2 lumens  
Efficiency: N/A  
Efficacy: 33.7 lumens/watt  
Spacing Criteria (0/90/45): 0.82 / 1.08 / 0.98  
Luminous Opening: Rectangular (W 0.23' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 36.5  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1059540

CATALOG NUMBER: S123RDRP-H1165D930-X4F0-XX-UDD-SVL-W

### Luminous Intensity Polar Plot

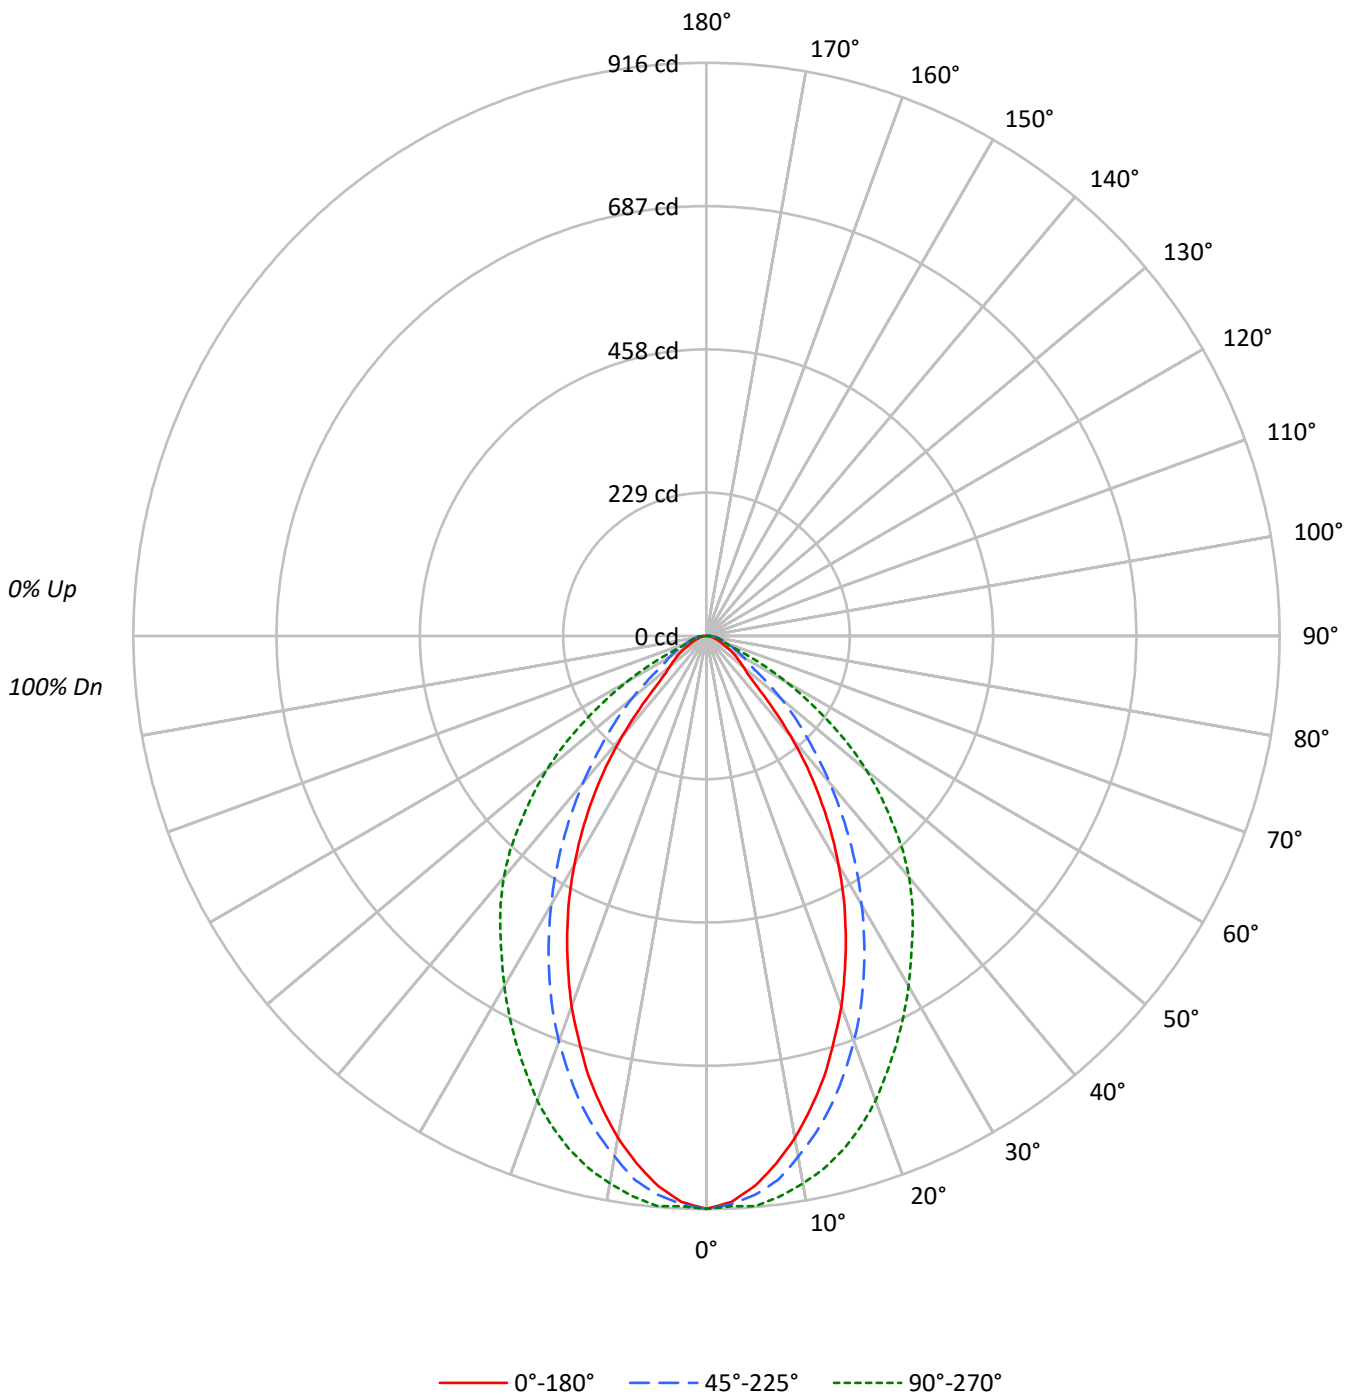



TEST NUMBER: P1059540

CATALOG NUMBER: S123RDRP-H1165D930-X4F0-XX-UDD-SVL-W

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	89
2	104	98	92	88	102	96	91	87	92	88	85	89	86	83	86	84	81	79
3	97	89	82	77	95	87	81	77	84	79	75	82	78	74	79	76	73	71
4	90	81	74	68	88	80	73	68	77	72	67	75	70	66	73	69	66	64
5	85	74	67	61	83	73	66	61	71	65	60	69	64	60	68	63	59	58
6	79	68	61	55	78	67	60	55	66	59	55	64	59	54	63	58	54	52
7	74	63	56	51	73	62	55	50	61	55	50	60	54	50	58	53	49	48
8	70	58	51	46	69	58	51	46	57	50	46	55	50	46	54	49	45	44
9	66	54	47	43	65	54	47	43	53	47	42	52	46	42	51	46	42	40
10	62	51	44	39	61	50	44	39	49	43	39	49	43	39	48	43	39	37

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	10753	10753	10753
5°	10405	10565	10779
10°	9711	10077	10593
15°	8850	9417	10316
20°	7875	8614	9878
25°	6824	7708	9314
30°	5722	6724	8760
35°	4533	5724	8234
40°	3208	4707	7724
45°	1888	3721	6951
50°	1412	2826	6089
55°	1187	1910	4891
60°	961	1630	3473
65°	759	1389	1834
70°	663	1212	1133
75°	617	1134	1084
80°	615	1231	1075
85°	768	1832	1374

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 6951 cd/sqm



TEST NUMBER: P1059540

CATALOG NUMBER: S123RDRP-H1165D930-X4F0-XX-UDD-SVL-W

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	84.3	6.9
10°-20°	219.0	17.8
20°-30°	278.9	22.7
30°-40°	262.4	21.3
40°-50°	189.0	15.4
50°-60°	109.1	8.9
60°-70°	49.9	4.1
70°-80°	24.9	2.0
80°-90°	11.8	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	582.2	47.4
0°-40°	844.6	68.7
0°-60°	1142.6	93.0
0°-90°	1229.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1229.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	916	916	916	916	916	
5°	883	898	896	905	914	82
15°	728	754	775	818	849	203
25°	527	554	595	661	719	241
35°	316	344	399	491	574	196
45°	114	142	224	337	419	96
55°	58	60	93	177	239	52
65°	27	39	50	56	66	28
75°	14	26	25	24	24	15
85°	6	12	14	12	10	6
90°	0	0	0	0	0	



TEST NUMBER: P1059540

CATALOG NUMBER: S123RDRP-H1165D930-X4F0-XX-UDD-SVL-W

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	915.7	915.7	915.7	915.7	915.7
2.5°	905.4	916.8	908.8	910.0	912.3
5°	882.7	897.5	896.3	905.4	914.5
7.5°	850.8	867.9	877.0	890.6	903.2
10°	814.4	833.8	845.1	870.2	888.4
12.5°	772.3	797.4	812.2	845.1	871.3
15°	728.0	754.1	774.6	817.8	848.6
17.5°	677.9	706.4	732.5	783.7	821.3
20°	630.2	657.5	689.3	745.0	790.5
22.5°	577.8	607.4	643.8	703.0	754.1
25°	526.7	553.9	594.9	660.9	718.9
27.5°	475.5	502.8	546.0	618.8	682.5
30°	422.0	450.4	495.9	576.7	646.1
32.5°	369.7	397.0	448.2	535.8	608.5
35°	316.2	343.5	399.3	491.4	574.4
37.5°	263.9	292.3	351.5	455.0	540.3
40°	209.3	240.0	307.1	417.5	503.9
42.5°	158.1	191.1	262.8	378.8	464.1
45°	113.7	142.2	224.1	336.7	418.6
47.5°	88.7	103.5	188.8	293.5	376.5
50°	77.3	79.6	154.7	253.7	333.3
52.5°	67.1	69.4	121.7	216.1	287.8
55°	58.0	60.3	93.3	177.4	238.9
57.5°	48.9	52.3	77.3	141.0	192.2
60°	40.9	45.5	69.4	108.1	147.9
62.5°	33.0	40.9	59.1	79.6	105.8
65°	27.3	38.7	50.0	55.7	66.0
67.5°	22.7	35.3	42.1	39.8	38.7
70°	19.3	31.8	35.3	31.8	33.0
72.5°	15.9	29.6	29.6	27.3	27.3
75°	13.6	26.2	25.0	23.9	23.9
77.5°	11.4	22.7	21.6	20.5	19.3
80°	9.1	18.2	18.2	17.1	15.9
82.5°	8.0	14.8	14.8	14.8	12.5
85°	5.7	12.5	13.6	12.5	10.2
87.5°	4.5	11.4	11.4	10.2	6.8
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1059540  
 CATALOG NUMBER: S123RDRP-H1165D930-X4F0-XX-UDD-SVL-W

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.22	9.54	8.58	9.85	10.17	15.58	16.90	15.95	17.22	17.53
	3H	9.61	10.78	9.99	11.11	11.47	15.81	16.98	16.19	17.31	17.68
	4H	10.16	11.25	10.56	11.60	11.98	15.93	17.02	16.33	17.37	17.75
	6H	10.60	11.60	11.01	11.97	12.36	16.04	17.05	16.46	17.42	17.81
	8H	10.77	11.72	11.20	12.11	12.52	16.09	17.04	16.52	17.44	17.84
	12H	10.93	11.84	11.36	12.22	12.65	16.15	17.06	16.59	17.44	17.87
4H	2H	9.32	10.41	9.72	10.76	11.14	15.54	16.63	15.94	16.98	17.37
	3H	10.98	11.87	11.39	12.28	12.68	15.90	16.80	16.31	17.20	17.60
	4H	11.79	12.59	12.23	13.01	13.45	16.10	16.90	16.53	17.32	17.76
	6H	12.43	13.12	12.89	13.57	14.03	16.33	17.02	16.79	17.46	17.93
	8H	12.66	13.31	13.13	13.76	14.23	16.43	17.08	16.90	17.52	17.99
	12H	12.88	13.45	13.37	13.93	14.41	16.56	17.13	17.04	17.61	18.09
8H	4H	12.23	12.88	12.70	13.33	13.80	16.14	16.78	16.61	17.23	17.70
	6H	13.15	13.68	13.65	14.17	14.65	16.47	17.00	16.97	17.49	17.97
	8H	13.57	14.04	14.09	14.56	15.05	16.66	17.13	17.18	17.65	18.14
	12H	13.98	14.41	14.50	14.90	15.47	16.90	17.33	17.42	17.82	18.39
12H	4H	12.29	12.86	12.78	13.35	13.82	16.13	16.70	16.61	17.18	17.65
	6H	13.28	13.76	13.80	14.27	14.76	16.48	16.96	17.00	17.47	17.97
	8H	13.82	14.24	14.34	14.74	15.31	16.74	17.16	17.25	17.66	18.23