

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1059619

Luminaire Tested: S123RDRP-H340D930-X4F0-XX-UDD-SVL-B

Issue Date: 8/7/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1059619  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2406-143-29)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/7/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123RDRP-H340D930-X4F0-XX-UDD-SVL-B  
Description: DEFINE 3 BLACK REGRESSED DIRECT RECESSED HOUSING WITH SILVER STRAIGHT BLADE LOUVER WITH DIFFUSER  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 3000K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 282.0 lumens  
Efficiency: N/A  
Efficacy: 24.1 lumens/watt  
Spacing Criteria (0/90/45): 1.08 / 0.85 / 0.98  
Luminous Opening: Rectangular (W 0.23' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 11.7  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1059619

CATALOG NUMBER: S123RDRP-H340D930-X4F0-XX-UDD-SVL-B

### Luminous Intensity Polar Plot

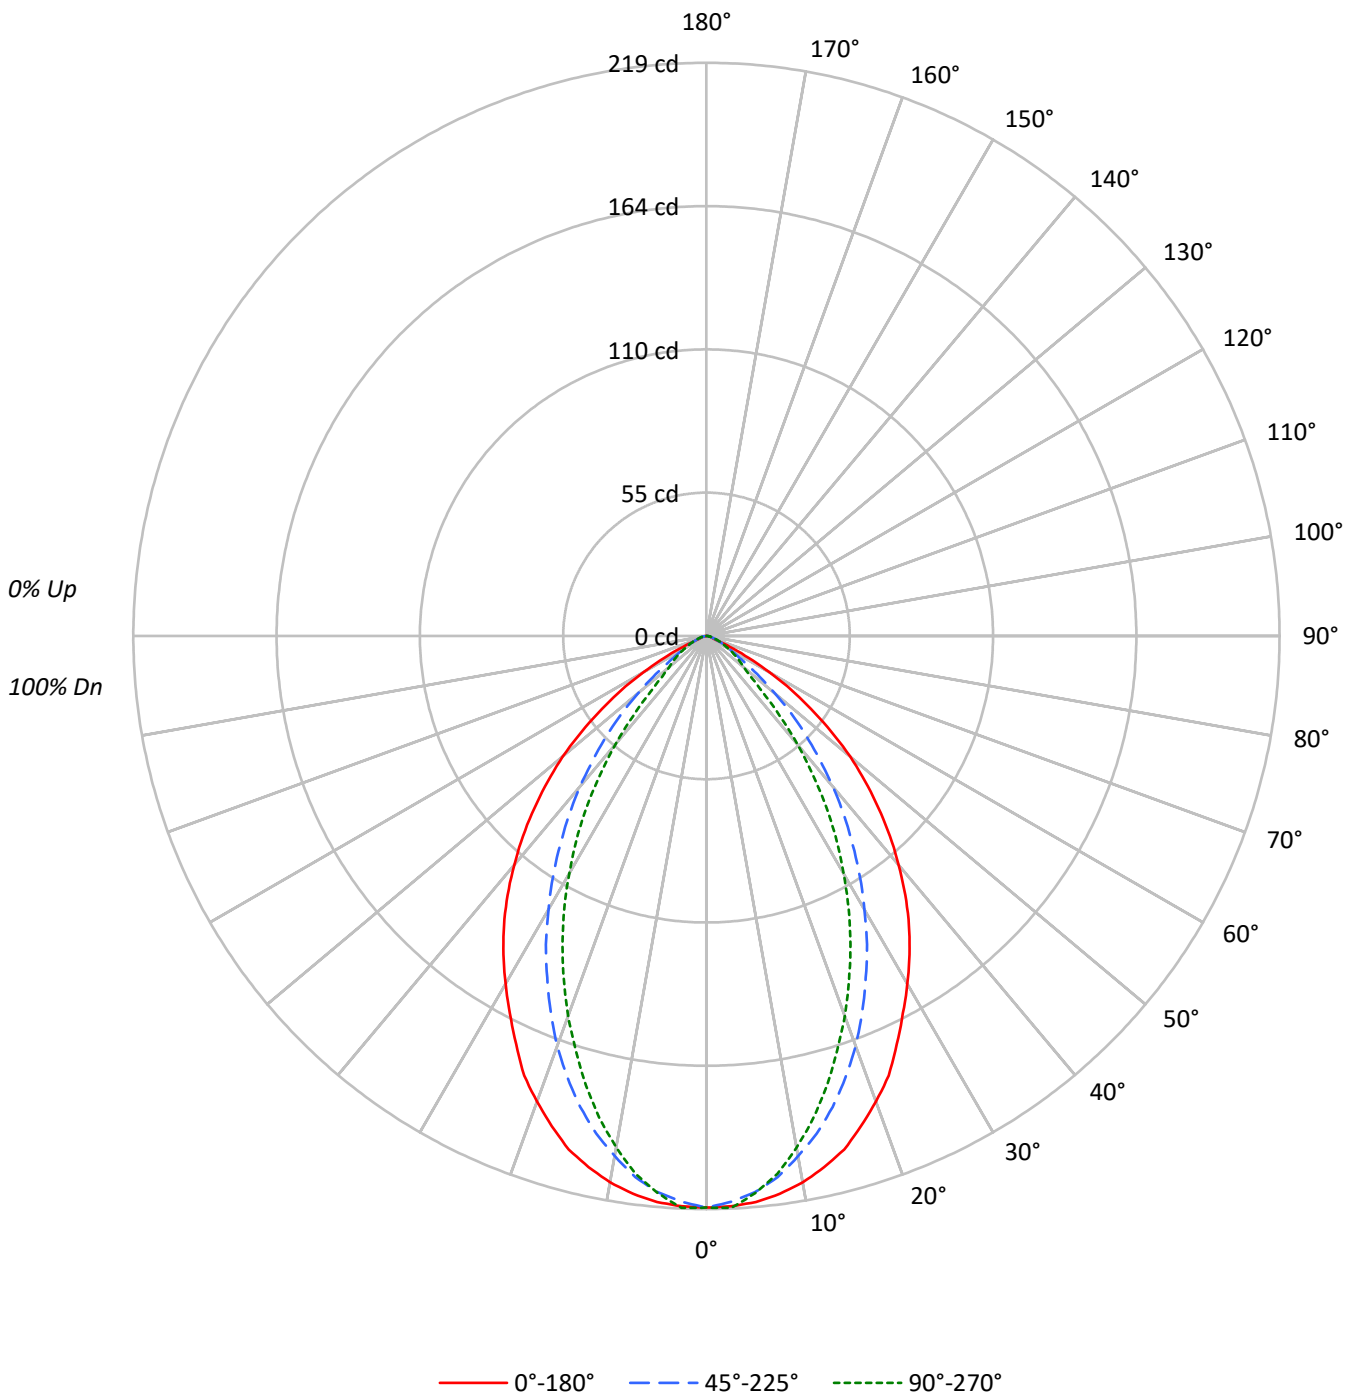



TEST NUMBER: P1059619

CATALOG NUMBER: S123RDRP-H340D930-X4F0-XX-UDD-SVL-B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	102	103	100	98	99	97	95	95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	86	83	82
3	98	90	84	80	96	89	83	79	86	82	78	84	80	76	81	78	75	73
4	92	83	76	71	90	82	75	70	79	74	70	77	73	69	75	71	68	66
5	86	76	69	64	84	75	68	63	73	67	63	71	66	62	70	65	62	60
6	81	70	63	58	79	69	62	58	68	62	57	66	61	57	65	60	56	55
7	76	65	58	53	74	64	57	53	63	57	52	61	56	52	60	55	52	50
8	71	60	53	48	70	60	53	48	58	52	48	57	52	48	56	51	48	46
9	67	56	49	45	66	56	49	44	55	48	44	54	48	44	53	48	44	42
10	64	52	46	41	63	52	46	41	51	45	41	50	45	41	49	44	41	39

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2565	2565	2565
5°	2559	2514	2519
10°	2528	2406	2367
15°	2470	2265	2161
20°	2366	2083	1931
25°	2230	1866	1687
30°	2081	1637	1421
35°	1934	1396	1144
40°	1752	1151	829
45°	1544	893	500
50°	1310	623	340
55°	997	375	285
60°	651	237	223
65°	272	178	178
70°	93	127	141
75°	77	91	109
80°	47	68	95
85°	40	40	94

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1544 cd/sqm



TEST NUMBER: P1059619

CATALOG NUMBER: S123RDRP-H340D930-X4F0-XX-UDD-SVL-B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	20.2	7.2
10°-20°	52.8	18.7
20°-30°	67.7	24.0
30°-40°	63.5	22.5
40°-50°	44.3	15.7
50°-60°	22.9	8.1
60°-70°	7.8	2.8
70°-80°	2.2	0.8
80°-90°	0.5	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	140.7	49.9
0°-40°	204.2	72.4
0°-60°	271.4	96.3
0°-90°	282.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	282.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	218	218	218	218	218	
5°	217	217	213	214	214	21
15°	203	198	186	180	178	57
25°	172	161	144	134	130	79
35°	135	118	97	85	80	84
45°	93	76	54	37	30	72
55°	49	36	18	14	14	44
65°	10	8	6	6	6	12
75°	2	2	2	2	2	2
85°	0	0	0	0	1	0
90°	0	0	0	0	0	



TEST NUMBER: P1059619

CATALOG NUMBER: S123RDRP-H340D930-X4F0-XX-UDD-SVL-B

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	218.4	218.4	218.4	218.4	218.4
2.5°	218.1	218.4	216.4	218.4	218.7
5°	217.1	216.7	213.3	214.4	213.7
7.5°	215.0	214.0	208.6	207.3	207.3
10°	212.0	210.0	201.8	199.5	198.5
12.5°	207.9	205.2	194.7	190.3	188.7
15°	203.2	198.1	186.3	180.2	177.8
17.5°	196.4	189.7	176.8	169.7	166.0
20°	189.3	180.9	166.7	158.2	154.5
22.5°	181.9	171.8	155.5	146.4	142.3
25°	172.1	161.3	144.0	134.2	130.2
27.5°	162.6	151.1	132.9	121.7	117.7
30°	153.5	140.0	120.7	109.9	104.8
32.5°	144.4	129.2	109.2	97.4	92.6
35°	134.9	118.3	97.4	84.9	79.8
37.5°	124.8	107.9	86.2	72.7	66.6
40°	114.3	96.7	75.1	59.8	54.1
42.5°	103.8	86.6	63.9	48.3	41.6
45°	93.0	76.1	53.8	37.2	30.1
47.5°	82.2	65.6	44.0	27.0	22.7
50°	71.7	55.8	34.1	19.9	18.6
52.5°	60.2	46.3	25.7	16.6	16.2
55°	48.7	36.5	18.3	14.2	13.9
57.5°	38.5	28.4	13.2	11.8	11.5
60°	27.7	20.3	10.1	9.8	9.5
62.5°	18.3	13.9	8.1	7.8	7.8
65°	9.8	8.5	6.4	6.1	6.4
67.5°	4.1	4.7	4.7	5.1	5.1
70°	2.7	3.0	3.7	4.1	4.1
72.5°	2.0	2.4	2.7	3.0	3.0
75°	1.7	1.7	2.0	2.4	2.4
77.5°	1.0	1.4	1.4	1.7	2.0
80°	0.7	1.0	1.0	1.4	1.4
82.5°	0.3	0.7	0.7	1.0	1.0
85°	0.3	0.3	0.3	0.3	0.7
87.5°	0.0	0.0	0.0	0.0	0.3
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1059619  
 CATALOG NUMBER: S123RDRP-H340D930-X4F0-XX-UDD-SVL-B

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.60	10.86	9.97	11.17	11.49	3.10	4.36	3.46	4.67	4.98
	3H	9.56	10.66	9.94	11.00	11.36	3.89	5.00	4.27	5.33	5.69
	4H	9.50	10.53	9.91	10.88	11.27	4.09	5.12	4.49	5.47	5.86
	6H	9.43	10.38	9.85	10.75	11.14	4.24	5.18	4.65	5.55	5.94
	8H	9.39	10.28	9.82	10.67	11.08	4.27	5.16	4.70	5.55	5.96
	12H	9.35	10.20	9.78	10.58	11.01	4.29	5.14	4.72	5.52	5.96
4H	2H	9.45	10.48	9.85	10.83	11.21	3.35	4.38	3.75	4.73	5.12
	3H	9.43	10.27	9.85	10.67	11.08	4.27	5.11	4.69	5.51	5.92
	4H	9.38	10.12	9.82	10.55	10.99	4.55	5.29	4.99	5.71	6.16
	6H	9.33	9.96	9.79	10.41	10.88	4.77	5.41	5.24	5.86	6.33
	8H	9.27	9.87	9.74	10.32	10.79	4.83	5.43	5.30	5.88	6.35
	12H	9.23	9.75	9.71	10.23	10.71	4.87	5.40	5.36	5.88	6.35
8H	4H	9.27	9.86	9.74	10.31	10.79	4.53	5.13	5.01	5.58	6.05
	6H	9.21	9.69	9.71	10.19	10.67	4.81	5.30	5.32	5.79	6.28
	8H	9.16	9.59	9.68	10.11	10.60	4.92	5.35	5.44	5.87	6.36
	12H	9.12	9.50	9.63	10.00	10.57	4.99	5.37	5.51	5.87	6.44
12H	4H	9.22	9.75	9.71	10.23	10.71	4.50	5.02	4.99	5.51	5.98
	6H	9.15	9.59	9.67	10.10	10.60	4.77	5.21	5.30	5.73	6.22
	8H	9.12	9.51	9.64	10.00	10.57	4.91	5.30	5.43	5.79	6.37