

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1059701

Luminaire Tested: S123RDRP-H560D930-X4F0-XX-UDD-SVL-S

Issue Date: 8/7/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1059701  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-68)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/7/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123RDRP-H560D930-X4F0-XX-UDD-SVL-S  
Description: DEFINE 3 SILVER REGRESSED DIRECT RECESSED HOUSING WITH SILVER STRAIGHT BLADE LOUVER WITH DIFFUSER  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 3000K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 494.5 lumens  
Efficiency: N/A  
Efficacy: 28.4 lumens/watt  
Spacing Criteria (0/90/45): 0.83 / 1.07 / 0.98  
Luminous Opening: Rectangular (W 0.23' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 17.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1059701

CATALOG NUMBER: S123RDRP-H560D930-X4F0-XX-UDD-SVL-S

### Luminous Intensity Polar Plot

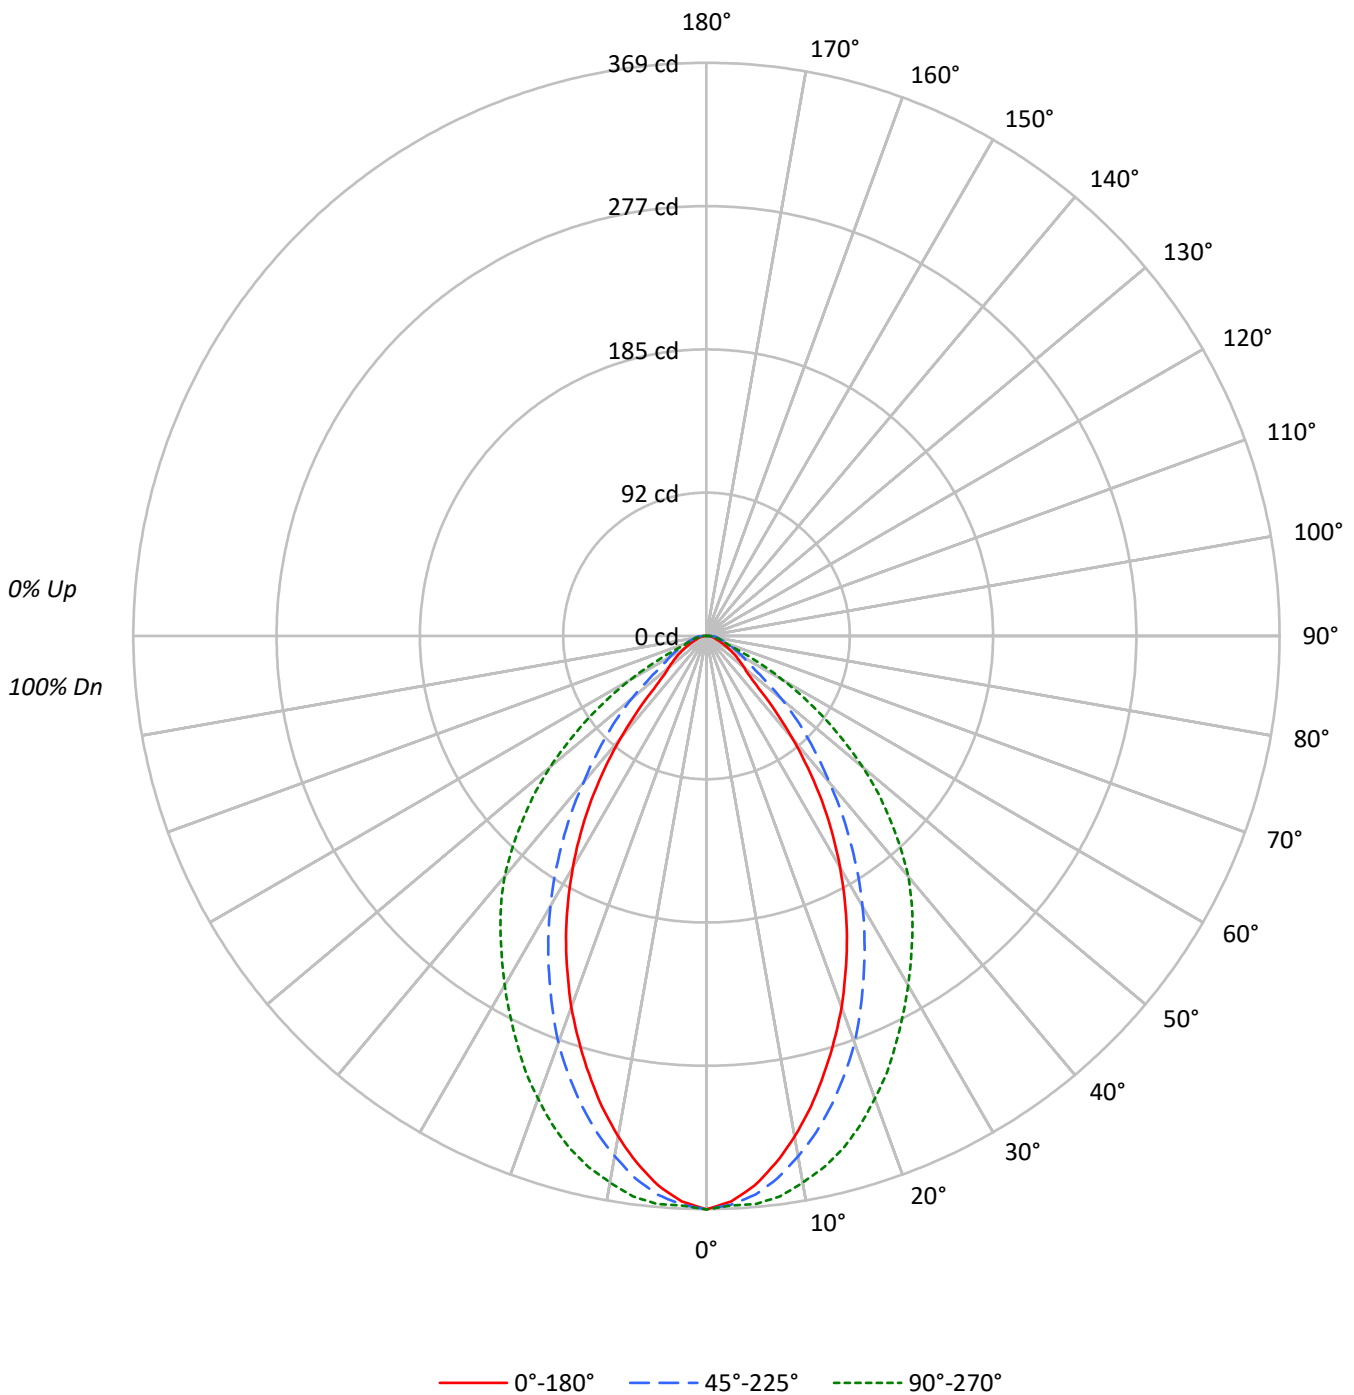



TEST NUMBER: P1059701

CATALOG NUMBER: S123RDRP-H560D930-X4F0-XX-UDD-SVL-S

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	111	108	105	102	109	106	103	100	101	99	97	98	96	94	94	93	91	89					89			
2	104	98	92	88	102	96	91	87	92	88	85	89	86	83	86	84	81	79					79			
3	97	89	82	77	95	87	81	77	84	79	75	82	78	74	79	76	73	71					71			
4	91	81	74	69	88	80	73	68	77	72	67	75	70	66	73	69	66	64					64			
5	85	74	67	61	83	73	66	61	71	65	61	69	64	60	68	63	59	58					58			
6	79	68	61	56	78	67	60	55	66	60	55	64	59	54	63	58	54	52					52			
7	74	63	56	51	73	62	55	50	61	55	50	60	54	50	58	53	49	48					48			
8	70	58	51	46	69	58	51	46	57	50	46	56	50	46	54	49	45	44					44			
9	66	54	47	43	65	54	47	43	53	47	42	52	46	42	51	46	42	40					40			
10	62	51	44	39	61	50	44	39	50	43	39	49	43	39	48	43	39	37					37			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	4335	4335	4335
5°	4187	4256	4326
10°	3901	4055	4260
15°	3551	3794	4148
20°	3179	3483	3960
25°	2773	3107	3743
30°	2331	2725	3523
35°	1855	2311	3314
40°	1321	1884	3098
45°	787	1513	2775
50°	581	1153	2402
55°	485	784	1908
60°	392	646	1341
65°	314	553	720
70°	257	481	443
75°	245	463	417
80°	257	507	399
85°	364	728	512

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 2775 cd/sqm



TEST NUMBER: P1059701

CATALOG NUMBER: S123RDRP-H560D930-X4F0-XX-UDD-SVL-S

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	33.9	6.9
10°-20°	88.1	17.8
20°-30°	112.4	22.7
30°-40°	105.7	21.4
40°-50°	76.0	15.4
50°-60°	43.6	8.8
60°-70°	19.9	4.0
70°-80°	10.0	2.0
80°-90°	4.9	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	234.4	47.4
0°-40°	340.1	68.8
0°-60°	459.7	93.0
0°-90°	494.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	494.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	369	369	369	369	369	
5°	355	362	361	364	367	33
15°	292	302	312	329	341	82
25°	214	224	240	266	289	98
35°	129	138	161	198	231	80
45°	47	58	91	134	167	40
55°	24	24	38	71	93	21
65°	11	16	20	22	26	11
75°	5	11	10	9	9	6
85°	3	5	5	5	4	3
90°	0	0	0	0	0	



TEST NUMBER: P1059701

CATALOG NUMBER: S123RDRP-H560D930-X4F0-XX-UDD-SVL-S

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	369.2	369.2	369.2	369.2	369.2
2.5°	364.4	369.7	366.5	366.5	367.0
5°	355.2	362.2	361.1	363.8	367.0
7.5°	342.3	349.8	352.0	358.4	363.8
10°	327.2	335.8	340.1	350.3	357.3
12.5°	310.5	320.2	327.2	340.1	350.3
15°	292.1	302.4	312.1	328.8	341.2
17.5°	273.3	283.5	295.9	315.3	329.9
20°	254.4	264.6	278.7	299.1	316.9
22.5°	233.9	244.2	259.3	282.4	304.0
25°	214.0	223.7	239.8	265.7	288.9
27.5°	193.0	202.7	220.4	248.5	274.3
30°	171.9	181.6	201.0	231.2	259.8
32.5°	150.9	160.1	181.1	214.5	245.2
35°	129.4	138.5	161.2	197.8	231.2
37.5°	107.3	116.4	142.8	182.7	217.2
40°	86.2	96.5	122.9	167.6	202.1
42.5°	65.8	76.5	106.7	151.5	184.9
45°	47.4	57.7	91.1	134.2	167.1
47.5°	36.1	41.5	77.1	117.0	149.8
50°	31.8	32.3	63.1	101.3	131.5
52.5°	27.5	28.0	49.0	86.2	112.1
55°	23.7	24.3	38.3	70.6	93.2
57.5°	19.9	21.0	31.3	56.1	74.9
60°	16.7	18.9	27.5	42.6	57.1
62.5°	13.5	17.2	23.7	31.3	41.0
65°	11.3	15.6	19.9	22.1	25.9
67.5°	9.2	14.6	16.7	15.6	15.6
70°	7.5	12.9	14.0	12.9	12.9
72.5°	6.5	12.4	11.9	10.8	10.8
75°	5.4	10.8	10.2	9.2	9.2
77.5°	4.9	9.2	8.6	8.1	7.5
80°	3.8	7.5	7.5	7.0	5.9
82.5°	3.2	6.5	6.5	5.9	4.9
85°	2.7	5.4	5.4	4.9	3.8
87.5°	2.2	4.9	4.9	4.3	2.7
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1059701

CATALOG NUMBER: S123RDRP-H560D930-X4F0-XX-UDD-SVL-S

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.07	6.39	5.44	6.70	7.02	12.31	13.63	12.67	13.94	14.25
	3H	6.48	7.65	6.86	7.98	8.34	12.54	13.71	12.92	14.04	14.41
	4H	7.04	8.13	7.44	8.48	8.87	12.65	13.74	13.05	14.09	14.47
	6H	7.51	8.51	7.92	8.88	9.27	12.75	13.76	13.17	14.13	14.52
	8H	7.69	8.64	8.12	9.03	9.44	12.80	13.75	13.23	14.14	14.55
	12H	7.88	8.79	8.31	9.17	9.60	12.86	13.76	13.29	14.15	14.58
4H	2H	6.15	7.24	6.55	7.59	7.97	12.27	13.36	12.67	13.71	14.09
	3H	7.84	8.73	8.25	9.14	9.54	12.63	13.53	13.05	13.93	14.33
	4H	8.68	9.48	9.11	9.89	10.34	12.82	13.62	13.25	14.04	14.48
	6H	9.34	10.03	9.80	10.48	10.94	13.04	13.73	13.50	14.18	14.64
	8H	9.59	10.24	10.06	10.69	11.16	13.14	13.79	13.61	14.23	14.71
	12H	9.85	10.42	10.33	10.90	11.38	13.26	13.83	13.75	14.31	14.79
8H	4H	9.11	9.76	9.58	10.20	10.67	12.86	13.51	13.33	13.96	14.43
	6H	10.06	10.59	10.57	11.09	11.57	13.19	13.72	13.70	14.22	14.70
	8H	10.53	11.01	11.05	11.52	12.01	13.38	13.86	13.91	14.38	14.87
	12H	11.01	11.43	11.52	11.93	12.50	13.62	14.04	14.13	14.54	15.11
12H	4H	9.17	9.74	9.66	10.22	10.70	12.86	13.43	13.34	13.91	14.38
	6H	10.21	10.69	10.73	11.20	11.70	13.22	13.70	13.74	14.21	14.70
	8H	10.81	11.23	11.32	11.72	12.29	13.48	13.90	14.00	14.40	14.97