

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1059785

Luminaire Tested: S123RDRP-H775D930-X4F0-XX-UDD-WVL-S

Issue Date: 8/7/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1059785  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-67 )  
Test Lab: INNOVATION CENTER  
Issue Date: 8/7/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123RDRP-H775D930-X4F0-XX-UDD-WVL-S  
Description: DEFINE 3 SILVER REGRESSED DIRECT RECESSED HOUSING WITH WHITE STRAIGHT BLADE  
LOUVER WITH DIFFUSER  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 3000K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1162.6 lumens  
Efficiency: N/A  
Efficacy: 49.5 lumens/watt  
Spacing Criteria (0/90/45): 0.93 / 1.12 / 1.1  
Luminous Opening: Rectangular (W 0.23' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 23.5  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1059785

CATALOG NUMBER: S123RDRP-H775D930-X4F0-XX-UDD-WVL-S

### Luminous Intensity Polar Plot

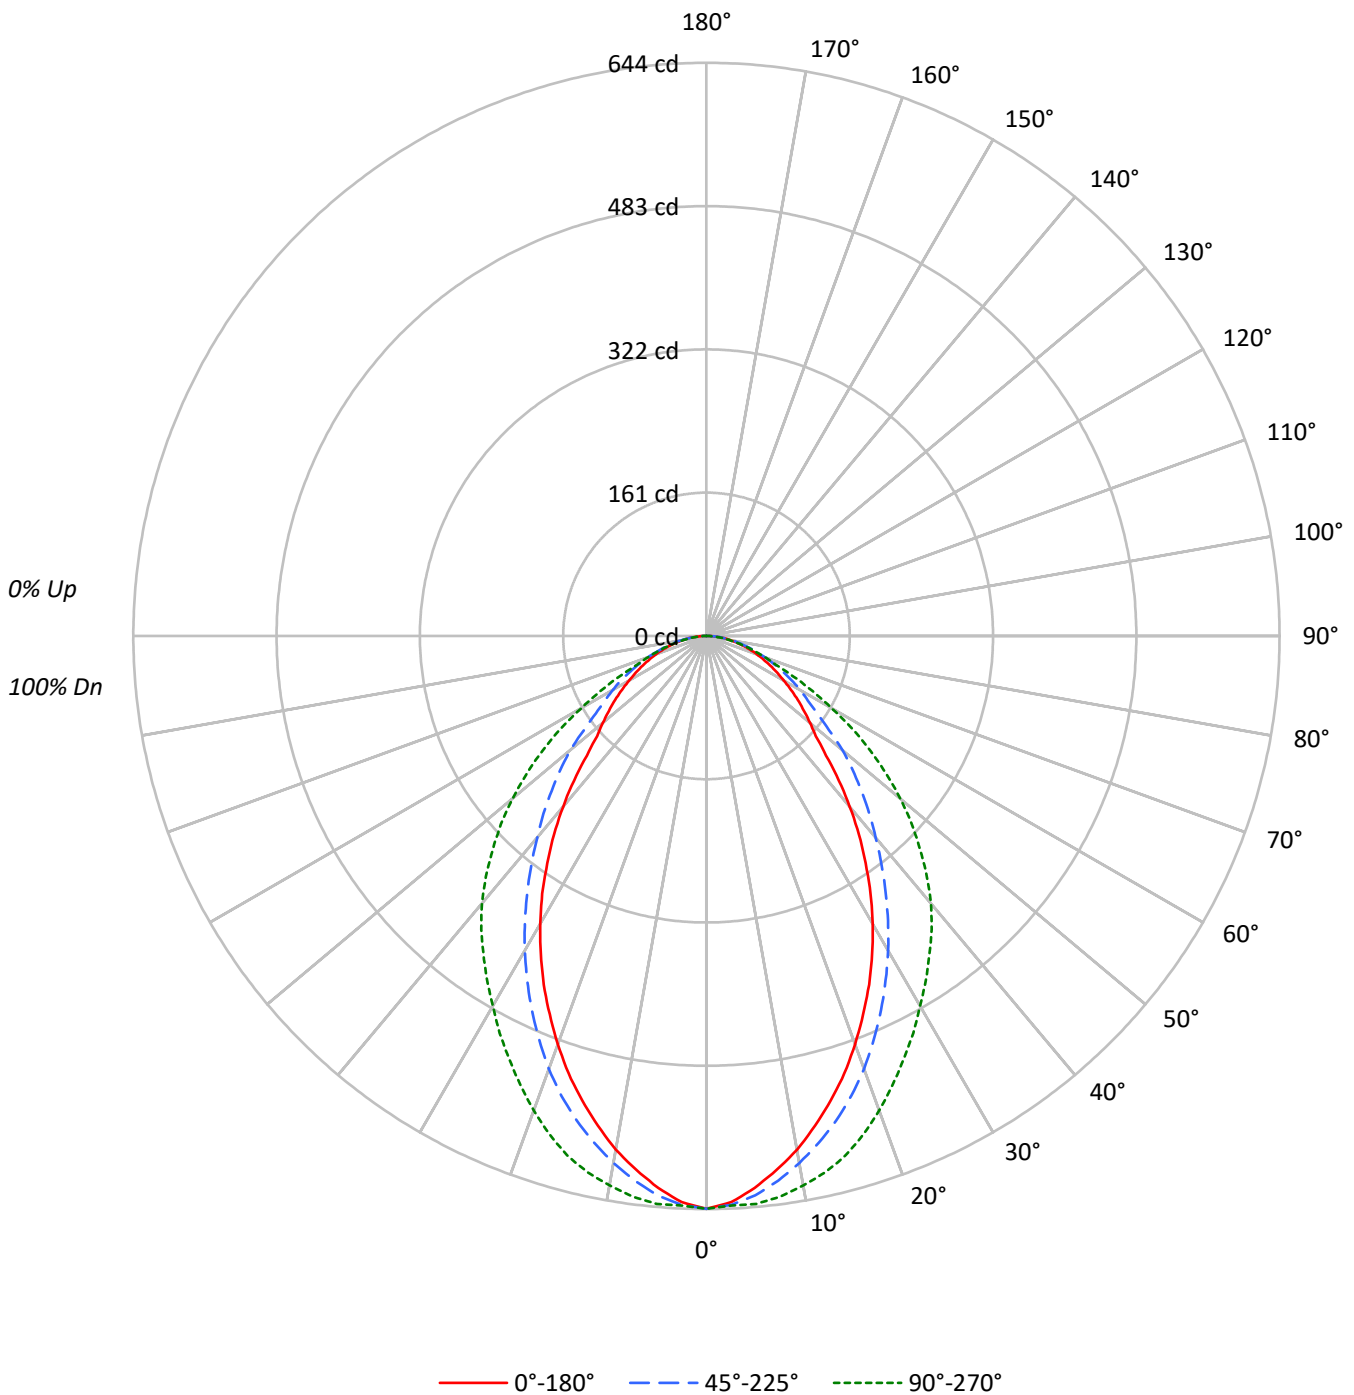

TEST NUMBER: P1059785

CATALOG NUMBER: S123RDRP-H775D930-X4F0-XX-UDD-WVL-S

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89					87				
2	102	94	88	83	99	92	87	82	89	84	80	86	82	78	83	80	77					75				
3	94	84	77	71	91	83	76	71	80	74	69	77	72	68	75	71	67					65				
4	87	76	68	62	84	74	67	61	72	66	61	70	64	60	68	63	59					57				
5	80	69	60	54	78	68	60	54	66	59	54	64	58	53	62	57	53					51				
6	75	63	54	48	73	62	54	48	60	53	48	58	52	47	57	51	47					45				
7	70	57	49	44	68	56	49	43	55	48	43	54	47	43	52	47	43					41				
8	65	53	45	39	64	52	45	39	51	44	39	50	43	39	48	43	39					37				
9	61	49	41	36	60	48	41	36	47	40	36	46	40	36	45	39	35					34				
10	58	45	38	33	56	45	38	33	44	37	33	43	37	33	42	37	33					31				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	7557	7557	7557
5°	7338	7435	7551
10°	6990	7170	7476
15°	6567	6851	7346
20°	6101	6468	7090
25°	5601	6012	6794
30°	5064	5535	6507
35°	4467	5029	6261
40°	3840	4534	6013
45°	3157	4085	5638
50°	2771	3639	5195
55°	2563	3106	4602
60°	2356	2853	3809
65°	2201	2620	2998
70°	2074	2383	2383
75°	1951	2191	2055
80°	1839	1988	1738
85°	1725	1927	1320

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 5638 cd/sqm



TEST NUMBER: P1059785

CATALOG NUMBER: S123RDRP-H775D930-X4F0-XX-UDD-WVL-S

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	59.5	5.1
10°-20°	159.5	13.7
20°-30°	216.3	18.6
30°-40°	226.2	19.5
40°-50°	196.2	16.9
50°-60°	145.9	12.6
60°-70°	93.6	8.1
70°-80°	50.2	4.3
80°-90°	15.2	1.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	435.3	37.4
0°-40°	661.5	56.9
0°-60°	1003.6	86.3
0°-90°	1162.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1162.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	644	644	644	644	644	
5°	622	633	631	635	641	58
15°	540	553	564	586	604	151
25°	432	446	464	495	524	198
35°	312	327	351	395	437	195
45°	190	204	246	299	340	150
55°	125	128	152	195	225	112
65°	79	86	94	100	108	79
75°	43	50	48	46	45	46
85°	13	16	14	12	10	15
90°	0	0	0	0	0	



TEST NUMBER: P1059785

CATALOG NUMBER: S123RDRP-H775D930-X4F0-XX-UDD-WVL-S

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	643.6	643.6	643.6	643.6	643.6
2.5°	636.8	645.8	639.8	639.8	640.6
5°	622.5	633.0	630.8	635.3	640.6
7.5°	605.1	616.4	617.2	627.7	635.3
10°	586.2	597.6	601.3	616.4	627.0
12.5°	563.6	576.4	583.2	602.1	617.2
15°	540.2	553.0	563.6	586.2	604.3
17.5°	515.3	528.1	541.7	567.4	587.0
20°	488.2	501.7	517.6	543.2	567.4
22.5°	460.2	474.6	491.2	519.1	546.2
25°	432.3	445.9	464.0	494.9	524.4
27.5°	402.9	417.2	436.1	470.0	503.2
30°	373.5	387.8	408.2	444.4	479.9
32.5°	343.3	357.6	379.5	420.3	458.7
35°	311.6	326.7	350.8	395.4	436.8
37.5°	281.4	295.8	322.9	372.0	415.7
40°	250.5	265.6	295.8	348.6	392.3
42.5°	220.3	235.4	270.9	323.7	366.7
45°	190.1	204.5	246.0	298.8	339.5
47.5°	166.7	177.3	222.6	272.4	313.1
50°	151.7	155.4	199.2	246.7	284.4
52.5°	138.1	141.1	173.5	221.1	255.0
55°	125.2	128.3	151.7	194.7	224.8
57.5°	112.4	116.2	135.1	167.5	194.7
60°	100.3	104.9	121.5	143.4	162.2
62.5°	89.8	95.1	107.9	121.5	134.3
65°	79.2	86.0	94.3	100.3	107.9
67.5°	69.4	77.0	81.5	83.0	83.7
70°	60.4	67.9	69.4	69.4	69.4
72.5°	51.3	59.6	58.1	57.3	56.6
75°	43.0	49.8	48.3	46.0	45.3
77.5°	34.7	40.7	38.5	37.0	34.7
80°	27.2	31.7	29.4	27.9	25.7
82.5°	20.4	23.4	21.1	19.6	17.4
85°	12.8	15.8	14.3	12.1	9.8
87.5°	6.8	9.1	7.5	6.8	3.8
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1059785  
 CATALOG NUMBER: S123RDRP-H775D930-X4F0-XX-UDD-WVL-S

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.81	15.30	14.18	15.61	15.92	16.57	18.05	16.93	18.37	18.68
	3H	15.52	16.85	15.90	17.18	17.54	17.59	18.92	17.97	19.25	19.61
	4H	16.18	17.43	16.58	17.78	18.16	17.96	19.20	18.36	19.55	19.93
	6H	16.68	17.83	17.10	18.20	18.59	18.21	19.36	18.62	19.73	20.12
	8H	16.86	17.96	17.29	18.35	18.75	18.28	19.38	18.71	19.77	20.17
	12H	16.99	18.04	17.42	18.42	18.85	18.32	19.36	18.75	19.75	20.18
4H	2H	14.59	15.83	14.99	16.18	16.56	16.84	18.09	17.24	18.43	18.81
	3H	16.51	17.55	16.93	17.95	18.35	18.09	19.13	18.50	19.53	19.93
	4H	17.32	18.25	17.76	18.67	19.11	18.58	19.51	19.01	19.93	20.37
	6H	17.97	18.77	18.42	19.22	19.68	18.96	19.77	19.42	20.21	20.67
	8H	18.19	18.95	18.66	19.39	19.86	19.07	19.83	19.54	20.27	20.74
	12H	18.37	19.04	18.85	19.52	19.99	19.14	19.82	19.63	20.30	20.77
8H	4H	17.64	18.40	18.11	18.84	19.31	18.77	19.53	19.24	19.97	20.44
	6H	18.44	19.06	18.93	19.55	20.03	19.26	19.88	19.76	20.38	20.85
	8H	18.76	19.32	19.28	19.84	20.32	19.44	20.00	19.95	20.51	21.00
	12H	19.04	19.54	19.55	20.03	20.60	19.57	20.07	20.08	20.56	21.12
12H	4H	17.67	18.34	18.15	18.82	19.29	18.79	19.46	19.27	19.94	20.41
	6H	18.49	19.05	19.01	19.56	20.05	19.30	19.86	19.81	20.37	20.86
	8H	18.88	19.38	19.39	19.87	20.44	19.53	20.02	20.04	20.52	21.08