

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1059520

Luminaire Tested: S123RDRP-H1165D850-X4F0-XX-UDD-SVL-B

Issue Date: 8/7/2025

Test Information

Test Method: LM-79-2024
Report Number: P1059520
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2406-143-29)
Test Lab: INNOVATION CENTER
Issue Date: 8/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123RDRP-H1165D850-X4F0-XX-UDD-SVL-B
Description: DEFINE 3 BLACK REGRESSED DIRECT RECESSED HOUSING WITH SILVER STRAIGHT BLADE
LOUVER WITH DIFFUSER
HIGH PERFORMANCE LIGHT ENGINE
Light Source: 5000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1288.6 lumens
Efficiency: N/A
Efficacy: 35.3 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 0.85 / 0.98
Luminous Opening: Rectangular (W 0.23' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 36.5
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1059520

CATALOG NUMBER: S123RDRP-H1165D850-X4F0-XX-UDD-SVL-B

Luminous Intensity Polar Plot

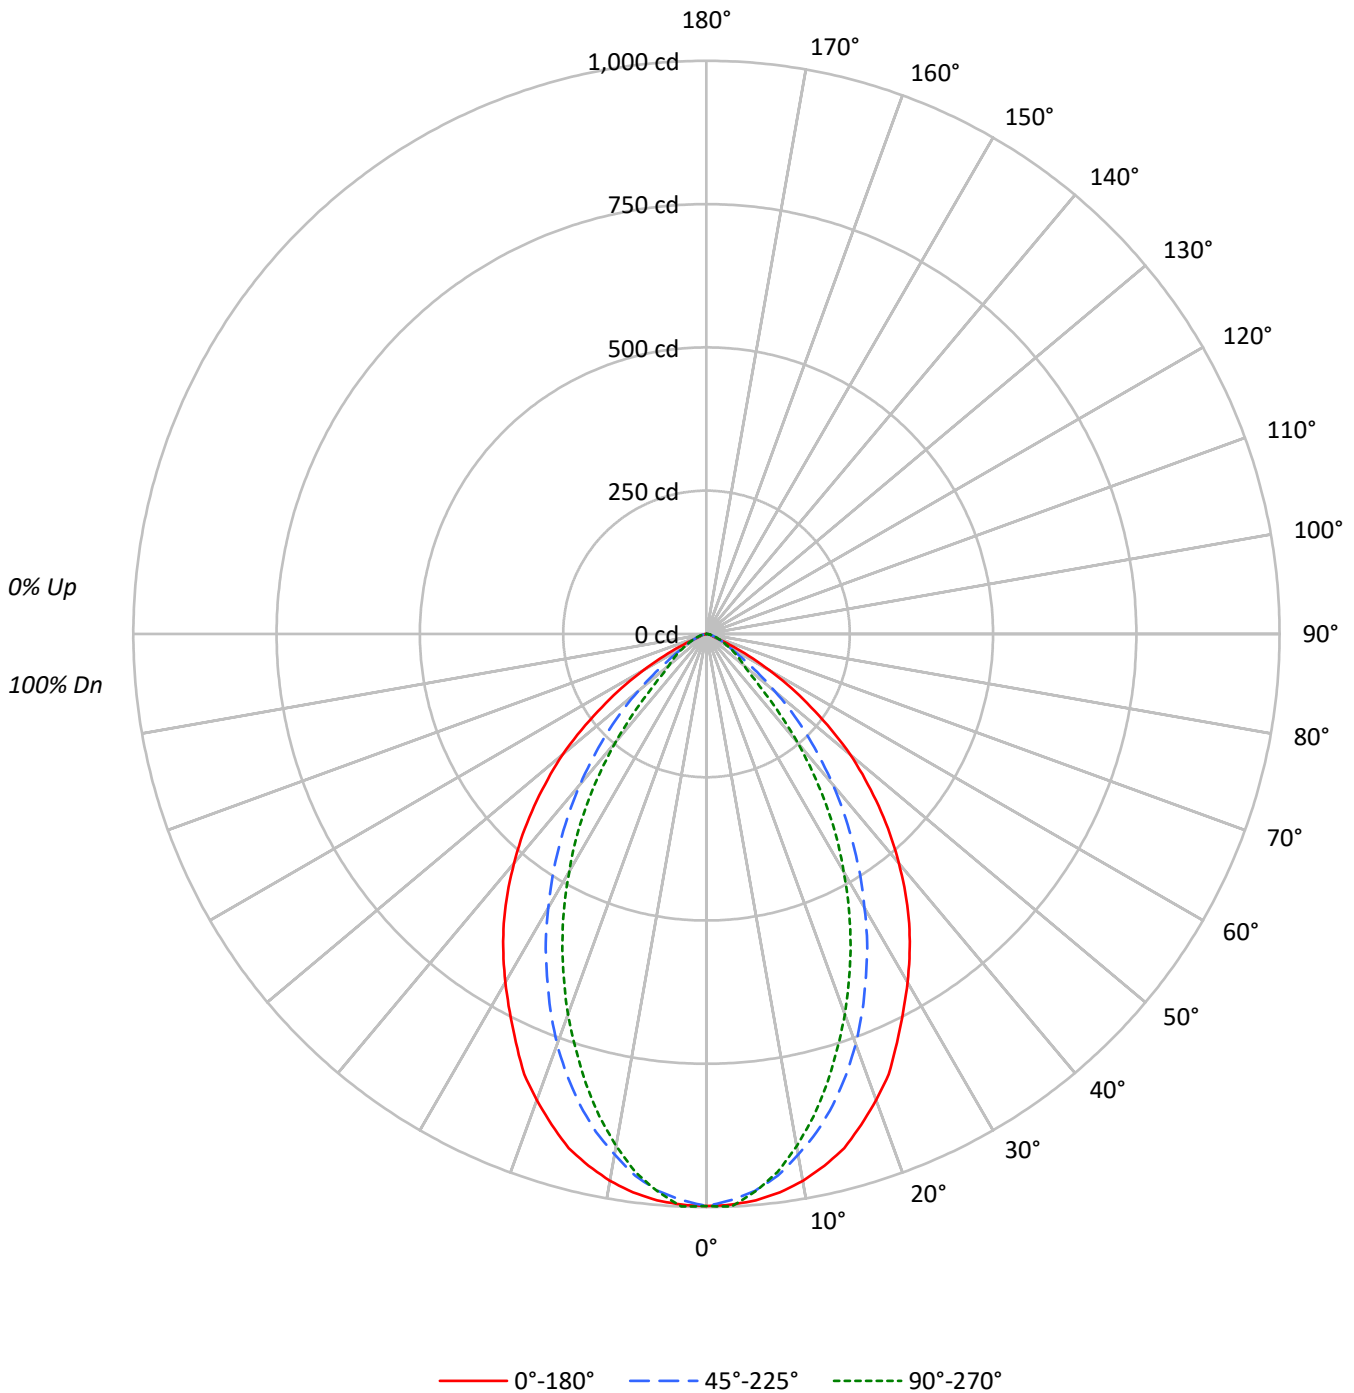



TEST NUMBER: P1059520

CATALOG NUMBER: S123RDRP-H1165D850-X4F0-XX-UDD-SVL-B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	112	109	106	103	110	107	104	102	103	100	98	99	97	95	95	94	93	91					91			
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	86	83	82					82			
3	98	90	84	80	96	89	83	79	86	82	78	84	80	76	81	78	75	73					73			
4	92	83	76	71	90	82	75	71	79	74	70	77	73	69	75	71	68	66					66			
5	86	76	69	64	84	75	68	63	73	67	63	71	66	62	70	65	62	60					60			
6	81	70	63	58	79	69	62	58	68	62	57	66	61	57	65	60	56	55					55			
7	76	65	58	53	74	64	57	53	63	57	52	61	56	52	60	55	52	50					50			
8	71	60	53	48	70	60	53	48	58	52	48	57	52	48	56	51	48	46					46			
9	67	56	49	45	66	56	49	44	55	48	44	54	48	44	53	48	44	42					42			
10	64	52	46	41	63	52	46	41	51	45	41	50	45	41	49	44	41	39					39			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11721	11721	11721
5°	11693	11493	11511
10°	11553	11000	10815
15°	11290	10350	9881
20°	10813	9519	8825
25°	10190	8529	7708
30°	9512	7479	6495
35°	8837	6379	5228
40°	8006	5258	3789
45°	7056	4080	2283
50°	5985	2852	1553
55°	4555	1707	1298
60°	2976	1090	1017
65°	1245	817	817
70°	426	584	635
75°	349	422	490
80°	210	311	419
85°	202	202	418

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 7056 cd/sqm



TEST NUMBER: P1059520

CATALOG NUMBER: S123RDRP-H1165D850-X4F0-XX-UDD-SVL-B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	92.2	7.2
10°-20°	241.3	18.7
20°-30°	309.4	24.0
30°-40°	290.3	22.5
40°-50°	202.5	15.7
50°-60°	104.7	8.1
60°-70°	35.8	2.8
70°-80°	10.2	0.8
80°-90°	2.1	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	642.9	49.9
0°-40°	933.2	72.4
0°-60°	1240.5	96.3
0°-90°	1288.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1288.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	998	998	998	998	998	
5°	992	990	975	980	977	94
15°	929	906	851	824	813	260
25°	786	737	658	614	595	362
35°	616	541	445	388	365	384
45°	425	348	246	170	138	327
55°	222	167	83	65	63	200
65°	45	39	29	28	29	53
75°	8	8	9	11	11	8
85°	2	2	2	2	3	1
90°	0	0	0	0	0	



TEST NUMBER: P1059520

CATALOG NUMBER: S123RDRP-H1165D850-X4F0-XX-UDD-SVL-B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	998.2	998.2	998.2	998.2	998.2
2.5°	996.7	998.2	988.9	998.2	999.8
5°	992.0	990.5	975.0	979.7	976.6
7.5°	982.8	978.1	953.4	947.2	947.2
10°	968.9	959.6	922.5	911.7	907.0
12.5°	950.3	937.9	890.0	870.0	862.2
15°	928.7	905.5	851.4	823.6	812.8
17.5°	897.8	866.9	808.2	775.7	758.7
20°	865.3	826.7	761.8	723.2	706.2
22.5°	831.3	785.0	710.8	669.1	650.5
25°	786.5	737.1	658.3	613.5	594.9
27.5°	743.3	690.7	607.3	556.3	537.7
30°	701.5	639.7	551.6	502.2	479.0
32.5°	659.8	590.3	499.1	445.0	423.4
35°	616.5	540.8	445.0	387.9	364.7
37.5°	570.2	492.9	394.0	332.2	304.4
40°	522.3	441.9	343.0	273.5	247.2
42.5°	474.4	395.6	292.0	221.0	190.1
45°	424.9	347.7	245.7	170.0	137.5
47.5°	375.5	299.8	200.9	123.6	103.5
50°	327.6	255.0	156.1	91.2	85.0
52.5°	275.0	211.7	117.4	75.7	74.2
55°	222.5	166.9	83.4	64.9	63.4
57.5°	176.2	129.8	60.3	54.1	52.5
60°	126.7	92.7	46.4	44.8	43.3
62.5°	83.4	63.4	37.1	35.5	35.5
65°	44.8	38.6	29.4	27.8	29.4
67.5°	18.5	21.6	21.6	23.2	23.2
70°	12.4	13.9	17.0	18.5	18.5
72.5°	9.3	10.8	12.4	13.9	13.9
75°	7.7	7.7	9.3	10.8	10.8
77.5°	4.6	6.2	6.2	7.7	9.3
80°	3.1	4.6	4.6	6.2	6.2
82.5°	1.5	3.1	3.1	4.6	4.6
85°	1.5	1.5	1.5	1.5	3.1
87.5°	0.0	0.0	0.0	0.0	1.5
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P1059520
 CATALOG NUMBER: S123RDRP-H1165D850-X4F0-XX-UDD-SVL-B

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.88	16.14	15.25	16.46	16.77	8.39	9.65	8.76	9.96	10.28
	3H	14.84	15.95	15.22	16.28	16.64	9.16	10.27	9.55	10.60	10.97
	4H	14.79	15.81	15.19	16.17	16.55	9.37	10.40	9.77	10.75	11.13
	6H	14.71	15.66	15.13	16.03	16.42	9.51	10.45	9.93	10.83	11.22
	8H	14.67	15.56	15.10	15.95	16.36	9.55	10.44	9.98	10.83	11.24
	12H	14.63	15.48	15.06	15.86	16.29	9.56	10.41	10.00	10.80	11.23
4H	2H	14.73	15.76	15.14	16.11	16.50	8.65	9.68	9.05	10.03	10.41
	3H	14.72	15.55	15.13	15.96	16.36	9.56	10.39	9.97	10.79	11.20
	4H	14.66	15.41	15.10	15.83	16.27	9.83	10.57	10.26	10.99	11.43
	6H	14.61	15.25	15.07	15.69	16.16	10.04	10.68	10.51	11.13	11.60
	8H	14.55	15.15	15.03	15.60	16.07	10.10	10.70	10.58	11.15	11.62
	12H	14.51	15.03	15.00	15.52	15.99	10.14	10.66	10.63	11.15	11.62
8H	4H	14.55	15.15	15.02	15.59	16.07	9.81	10.41	10.28	10.85	11.33
	6H	14.49	14.97	14.99	15.47	15.95	10.08	10.56	10.58	11.06	11.55
	8H	14.44	14.87	14.96	15.39	15.88	10.19	10.62	10.71	11.14	11.63
	12H	14.40	14.78	14.92	15.28	15.85	10.26	10.64	10.77	11.14	11.71
12H	4H	14.51	15.03	14.99	15.51	15.99	9.77	10.30	10.26	10.78	11.26
	6H	14.43	14.87	14.96	15.38	15.88	10.04	10.48	10.57	10.99	11.49
	8H	14.40	14.79	14.92	15.28	15.85	10.18	10.56	10.69	11.06	11.63