

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1059599

Luminaire Tested: S123RDRP-H340D850-X4F0-XX-UDD-BVL-S

Issue Date: 8/7/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1059599  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-69)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/7/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123RDRP-H340D850-X4F0-XX-UDD-BVL-S  
Description: DEFINE 3 SILVER REGRESSED DIRECT RECESSED HOUSING WITH BLACK STRAIGHT BLADE LOUVER WITH DIFFUSER  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 5000K CCT, 80 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 361.7 lumens  
Efficiency: N/A  
Efficacy: 30.9 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 1.06 / 0.94  
Luminous Opening: Rectangular (W 0.23' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 11.7  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1059599

CATALOG NUMBER: S123RDRP-H340D850-X4F0-XX-UDD-BVL-S

### Luminous Intensity Polar Plot

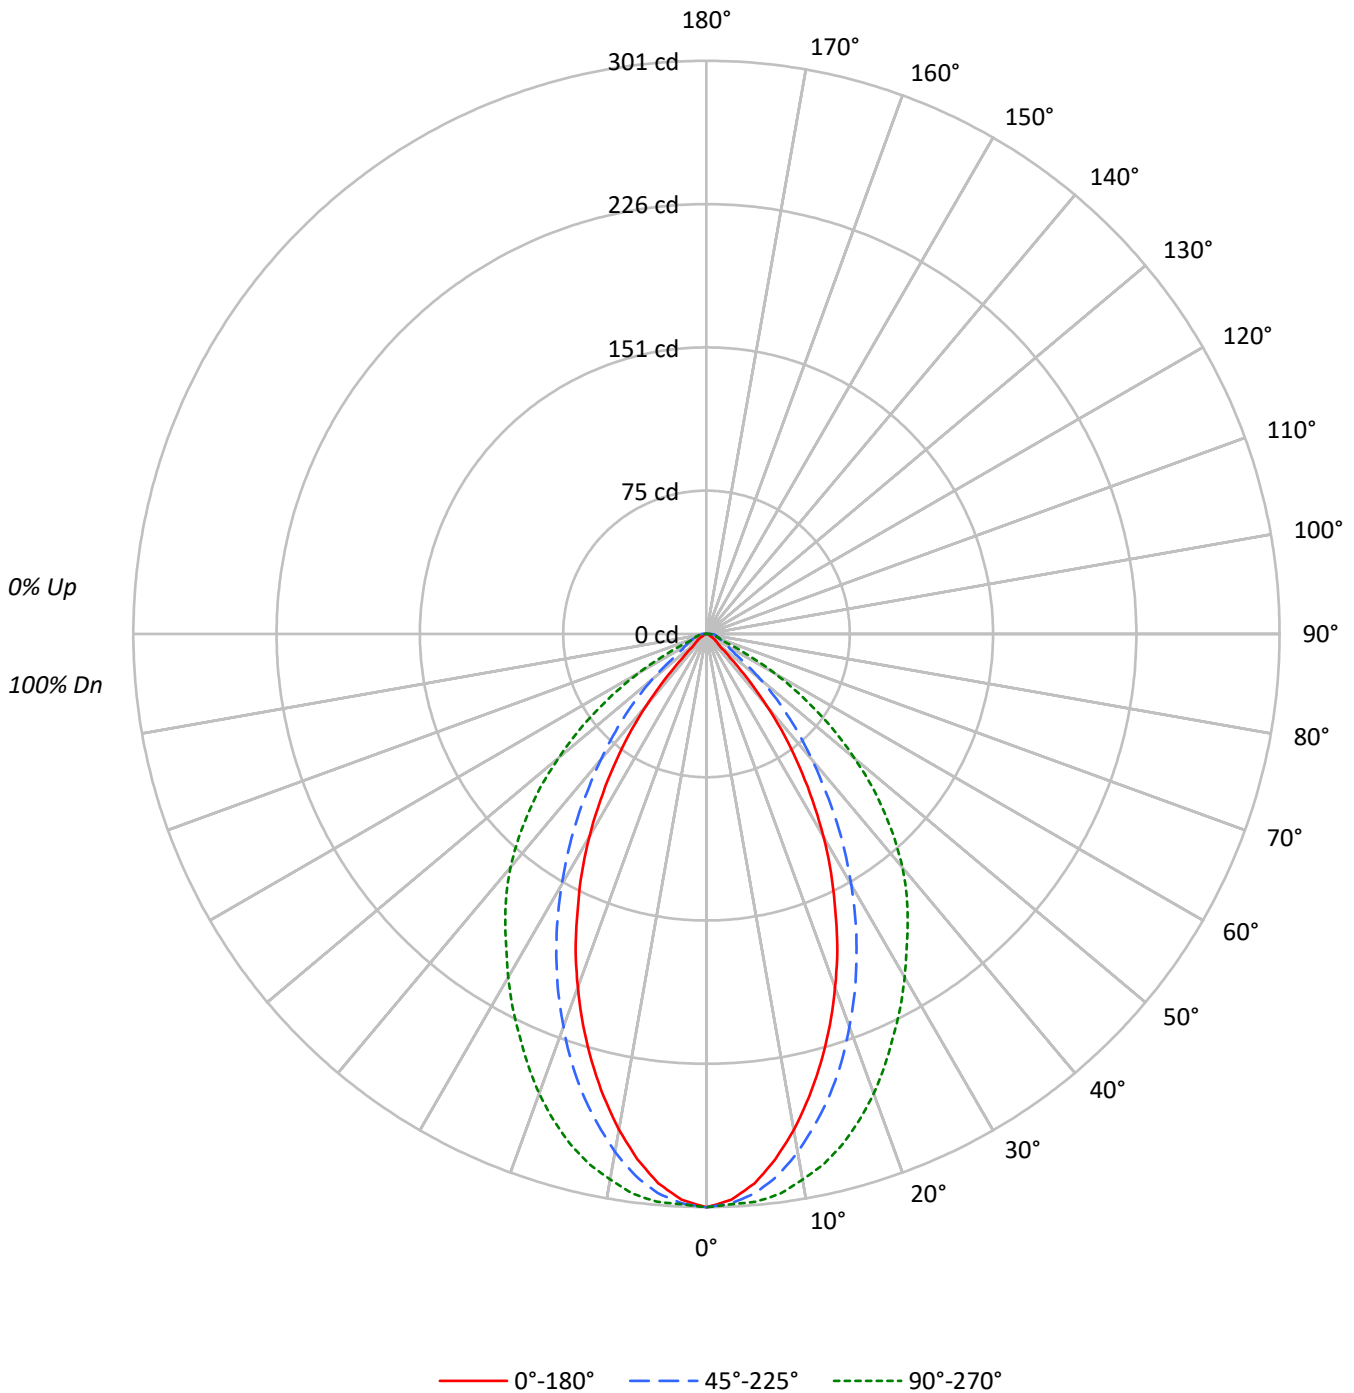



TEST NUMBER: P1059599

CATALOG NUMBER: S123RDRP-H340D850-X4F0-XX-UDD-BVL-S

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	98	98	96	95	95	93	92	90
2	105	99	94	89	102	97	92	88	94	90	86	90	87	85	88	85	83	81
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73
4	92	83	76	71	90	81	75	70	79	74	69	77	72	69	75	71	68	66
5	86	76	69	64	84	75	68	64	73	67	63	71	66	62	70	65	62	60
6	81	70	63	58	79	69	63	58	68	62	57	66	61	57	65	60	57	55
7	76	65	58	53	75	64	58	53	63	57	53	62	56	52	61	56	52	50
8	72	61	54	49	70	60	53	49	59	53	48	58	52	48	57	52	48	46
9	68	57	50	45	67	56	50	45	55	49	45	54	49	45	53	48	45	43
10	64	53	46	42	63	53	46	42	52	46	42	51	45	42	50	45	41	40

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3536	3536	3536
5°	3414	3474	3528
10°	3151	3294	3470
15°	2826	3045	3370
20°	2468	2744	3210
25°	2076	2416	3012
30°	1666	2061	2822
35°	1221	1696	2640
40°	756	1320	2456
45°	291	995	2187
50°	142	681	1851
55°	113	377	1451
60°	75	315	972
65°	64	281	436
70°	62	254	254
75°	82	272	250
80°	122	345	277
85°	189	552	377

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 2187 cd/sqm

TEST NUMBER: P1059599

CATALOG NUMBER: S123RDRP-H340D850-X4F0-XX-UDD-BVL-S

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	27.6	7.6
10°-20°	70.7	19.5
20°-30°	87.7	24.3
30°-40°	78.6	21.7
40°-50°	51.7	14.3
50°-60°	25.9	7.2
60°-70°	10.2	2.8
70°-80°	5.7	1.6
80°-90°	3.6	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	186.0	51.4
0°-40°	264.6	73.2
0°-60°	342.2	94.6
0°-90°	361.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	361.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	301	301	301	301	301	
5°	290	294	295	296	299	27
15°	232	240	250	268	277	65
25°	160	170	186	213	232	73
35°	85	97	118	155	184	53
45°	18	29	60	101	132	17
55°	6	6	18	50	71	5
65°	2	6	10	13	16	2
75°	2	6	6	6	6	2
85°	1	4	4	4	3	1
90°	0	0	0	0	0	



TEST NUMBER: P1059599

CATALOG NUMBER: S123RDRP-H340D850-X4F0-XX-UDD-BVL-S

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	301.1	301.1	301.1	301.1	301.1
2.5°	297.5	301.6	299.3	299.3	299.8
5°	289.6	294.2	294.7	296.5	299.3
7.5°	278.1	284.1	286.9	292.4	296.5
10°	264.3	270.8	276.3	286.0	291.0
12.5°	249.1	255.6	263.8	277.2	285.0
15°	232.5	239.9	250.5	267.5	277.2
17.5°	215.5	222.9	235.8	255.1	267.5
20°	197.5	205.8	219.6	241.7	256.9
22.5°	179.6	188.8	203.5	227.5	245.0
25°	160.2	170.4	186.5	212.7	232.5
27.5°	141.8	152.4	169.5	198.0	220.6
30°	122.9	133.5	152.0	182.8	208.1
32.5°	103.6	115.6	134.9	168.5	195.7
35°	85.2	96.7	118.3	154.7	184.2
37.5°	67.2	78.7	101.3	141.4	172.7
40°	49.3	61.2	86.1	128.5	160.2
42.5°	32.2	44.7	72.8	115.6	146.4
45°	17.5	29.0	59.9	100.8	131.7
47.5°	9.7	15.7	48.3	87.0	117.4
50°	7.8	8.7	37.3	74.1	101.3
52.5°	6.4	7.4	26.7	61.7	86.6
55°	5.5	6.4	18.4	49.7	70.9
57.5°	4.6	5.5	14.7	38.2	55.7
60°	3.2	5.5	13.4	28.1	41.4
62.5°	2.8	5.5	11.5	19.3	27.6
65°	2.3	6.4	10.1	12.9	15.7
67.5°	1.8	6.4	8.7	8.3	8.3
70°	1.8	6.4	7.4	6.9	7.4
72.5°	1.8	6.9	6.9	6.4	6.4
75°	1.8	6.0	6.0	5.5	5.5
77.5°	1.8	5.5	5.5	5.1	5.1
80°	1.8	5.1	5.1	4.6	4.1
82.5°	1.8	4.6	4.6	4.1	3.7
85°	1.4	4.1	4.1	4.1	2.8
87.5°	1.4	3.7	4.1	3.7	2.3
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1059599

CATALOG NUMBER: S123RDRP-H340D850-X4F0-XX-UDD-BVL-S

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.00	0.00	0.00	0.00	10.93	12.19	11.30	12.50	12.82
	3H	0.00	0.43	0.00	0.76	1.13	11.01	12.12	11.39	12.46	12.82
	4H	0.49	1.52	0.89	1.87	2.26	11.07	12.11	11.48	12.46	12.85
	6H	1.53	2.48	1.94	2.85	3.25	11.17	12.12	11.59	12.49	12.89
	8H	2.06	2.96	2.49	3.35	3.76	11.23	12.13	11.66	12.52	12.93
	12H	2.55	3.41	2.98	3.79	4.22	11.30	12.16	11.74	12.55	12.98
4H	2H	0.09	1.12	0.49	1.47	1.86	10.79	11.83	11.20	12.18	12.56
	3H	2.54	3.39	2.95	3.79	4.20	10.97	11.81	11.38	12.22	12.62
	4H	3.89	4.65	4.33	5.07	5.51	11.09	11.85	11.53	12.27	12.71
	6H	5.02	5.68	5.49	6.12	6.59	11.31	11.96	11.77	12.41	12.88
	8H	5.53	6.14	6.00	6.59	7.06	11.43	12.04	11.90	12.49	12.96
	12H	5.98	6.52	6.47	7.01	7.48	11.59	12.13	12.08	12.62	13.09
8H	4H	4.81	5.43	5.28	5.87	6.34	11.10	11.71	11.57	12.15	12.63
	6H	6.42	6.92	6.92	7.42	7.90	11.43	11.93	11.93	12.43	12.91
	8H	7.24	7.69	7.77	8.21	8.70	11.65	12.10	12.18	12.62	13.11
	12H	8.02	8.42	8.53	8.91	9.48	11.98	12.38	12.49	12.87	13.45
12H	4H	4.98	5.52	5.47	6.01	6.48	11.09	11.62	11.57	12.11	12.58
	6H	6.74	7.19	7.26	7.71	8.20	11.46	11.91	11.98	12.43	12.92
	8H	7.74	8.14	8.26	8.64	9.21	11.76	12.16	12.28	12.66	13.23