

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1059600

Luminaire Tested: S123RDRP-H340D850-X4F0-XX-UDD-BVL-W

Issue Date: 8/7/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1059600  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-66)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/7/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123RDRP-H340D850-X4F0-XX-UDD-BVL-W  
Description: DEFINE 3 WHITE REGRESSED DIRECT RECESSED HOUSING WITH BLACK STRAIGHT BLADE  
LOUVER WITH DIFFUSER  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 5000K CCT, 80 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 420.8 lumens  
Efficiency: N/A  
Efficacy: 36.0 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 1.06 / 0.94  
Luminous Opening: Rectangular (W 0.23' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 11.7  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1059600

CATALOG NUMBER: S123RDRP-H340D850-X4F0-XX-UDD-BVL-W

### Luminous Intensity Polar Plot

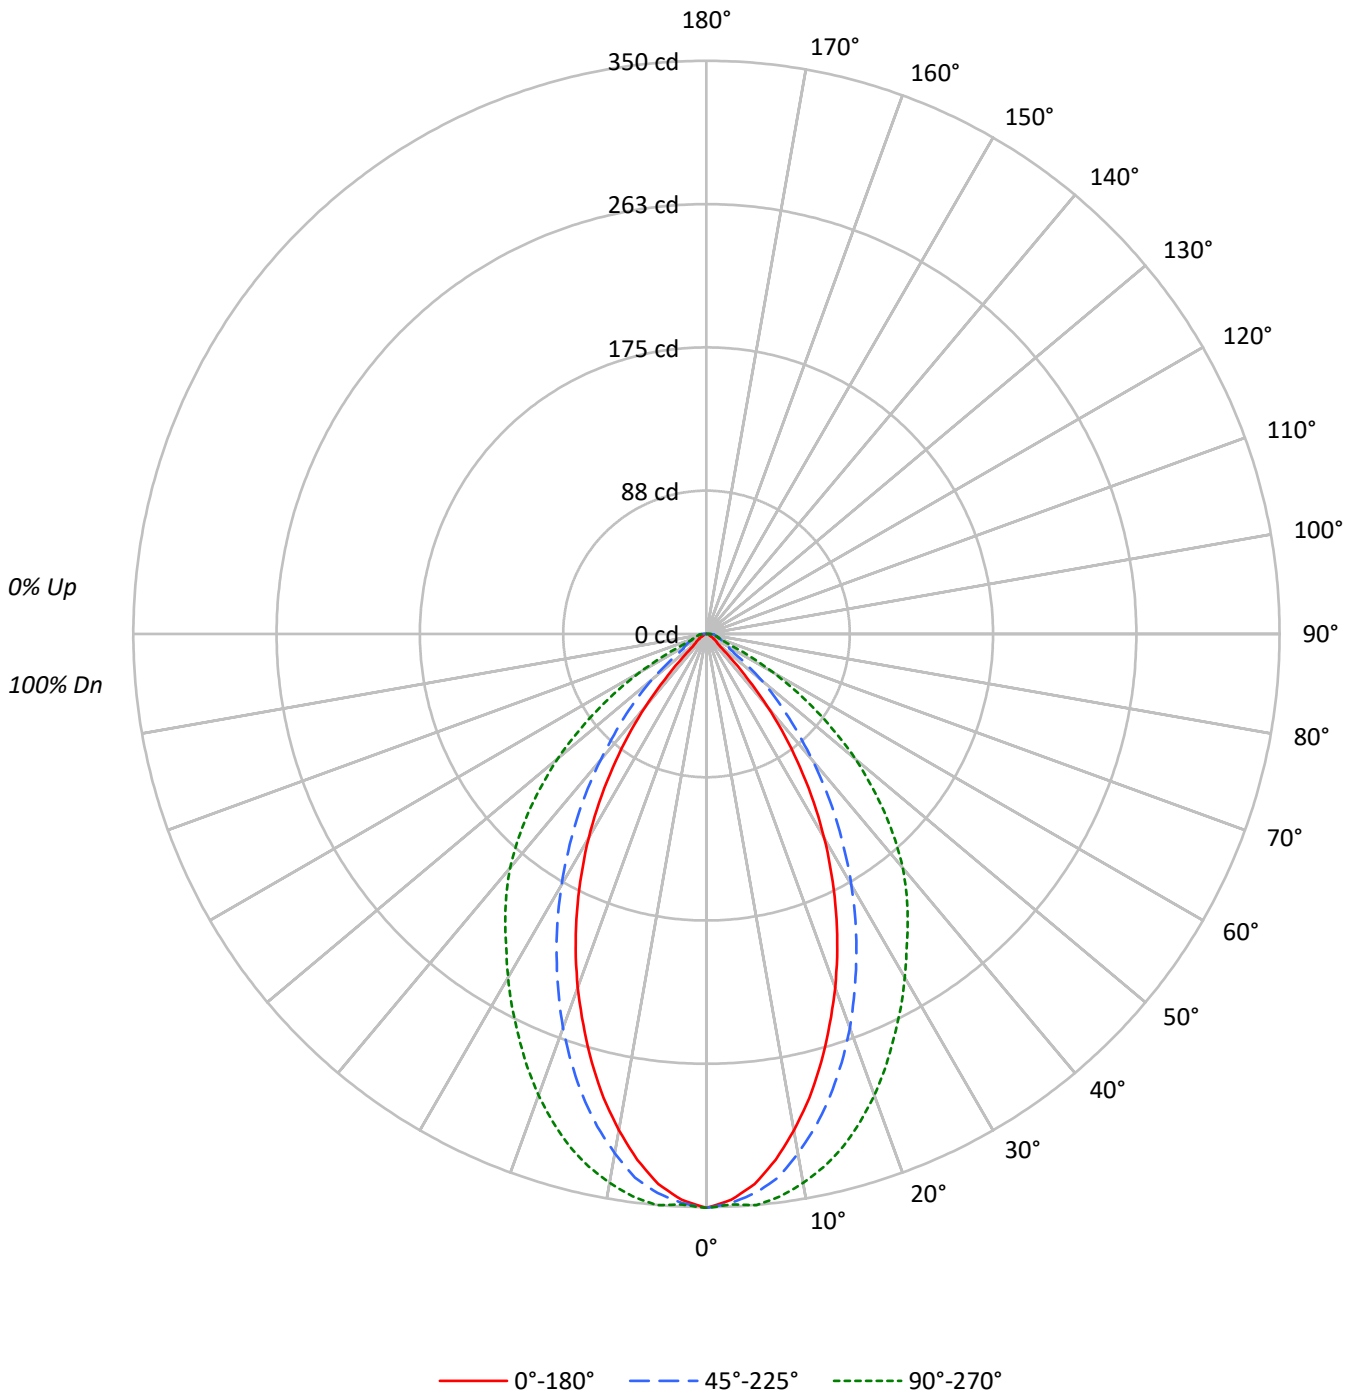



TEST NUMBER: P1059600

CATALOG NUMBER: S123RDRP-H340D850-X4F0-XX-UDD-BVL-W

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100													100															
1	112	108	105	102	109	106	103	101	102	100	98	98	96	95	95	93	92	90													90															
2	105	99	94	90	102	97	92	88	94	90	87	91	87	85	88	85	83	81													81															
3	98	90	84	79	96	89	83	79	86	81	77	83	79	76	81	78	75	73													73															
4	92	83	76	71	90	81	75	70	79	74	70	77	72	69	75	71	68	66													66															
5	86	76	69	64	84	75	69	64	73	67	63	71	66	62	70	65	62	60													60															
6	81	70	63	58	79	69	63	58	68	62	57	66	61	57	65	60	57	55													55															
7	76	65	58	53	75	65	58	53	63	57	53	62	56	52	61	56	52	50													50															
8	72	61	54	49	70	60	53	49	59	53	49	58	52	48	57	52	48	47													47															
9	68	57	50	45	67	56	50	45	55	49	45	54	49	45	53	48	45	43													43															
10	64	53	46	42	63	53	46	42	52	46	42	51	45	42	50	45	42	40													40															

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	4116	4116	4116
5°	3975	4040	4127
10°	3669	3839	4059
15°	3292	3550	3936
20°	2872	3200	3746
25°	2423	2805	3515
30°	1948	2399	3285
35°	1426	1974	3071
40°	889	1539	2859
45°	337	1147	2547
50°	161	791	2170
55°	123	434	1679
60°	87	369	1104
65°	64	320	461
70°	62	302	302
75°	82	313	313
80°	122	372	345
85°	243	620	498

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 2547 cd/sqm



TEST NUMBER: P1059600

CATALOG NUMBER: S123RDRP-H340D850-X4F0-XX-UDD-BVL-W

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	32.2	7.6
10°-20°	82.5	19.6
20°-30°	102.1	24.3
30°-40°	91.6	21.8
40°-50°	60.0	14.3
50°-60°	30.0	7.1
60°-70°	11.7	2.8
70°-80°	6.6	1.6
80°-90°	4.1	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	216.8	51.5
0°-40°	308.4	73.3
0°-60°	398.5	94.7
0°-90°	420.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	420.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	350	350	350	350	350	
5°	337	343	343	346	350	31
15°	271	282	292	311	324	75
25°	187	198	216	247	271	85
35°	100	113	138	179	214	62
45°	20	33	69	118	153	19
55°	6	7	21	58	82	6
65°	2	7	12	15	17	2
75°	2	7	7	7	7	2
85°	2	5	5	5	4	2
90°	0	0	0	0	0	



TEST NUMBER: P1059600

CATALOG NUMBER: S123RDRP-H340D850-X4F0-XX-UDD-BVL-W

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	350.5	350.5	350.5	350.5	350.5
2.5°	345.9	351.0	347.8	348.2	348.7
5°	337.2	342.7	342.7	346.4	350.1
7.5°	323.8	330.2	334.9	341.3	346.4
10°	307.7	315.5	322.0	333.5	340.4
12.5°	290.2	299.8	308.1	323.3	333.0
15°	270.8	281.9	292.0	311.4	323.8
17.5°	250.1	261.2	274.5	297.1	312.3
20°	229.8	240.9	256.1	281.4	299.8
22.5°	208.7	220.2	236.3	264.4	286.0
25°	187.0	198.5	216.5	247.3	271.3
27.5°	165.4	176.9	197.1	230.8	257.0
30°	143.7	155.2	176.9	212.8	242.3
32.5°	122.1	134.5	157.1	196.2	227.5
35°	99.5	112.8	137.7	179.2	214.2
37.5°	78.8	91.2	119.3	164.4	200.8
40°	58.0	71.4	100.4	150.2	186.5
42.5°	37.8	52.0	83.4	134.5	170.4
45°	20.3	32.7	69.1	118.4	153.4
47.5°	11.1	18.0	55.7	101.3	135.9
50°	8.8	10.1	43.3	86.6	118.8
52.5°	7.4	8.3	30.9	72.8	99.9
55°	6.0	7.4	21.2	58.0	82.0
57.5°	5.1	6.4	16.6	45.1	64.0
60°	3.7	5.5	15.7	33.2	47.0
62.5°	2.8	6.0	13.8	23.0	30.9
65°	2.3	6.9	11.5	15.2	16.6
67.5°	1.8	7.4	10.1	9.7	9.7
70°	1.8	6.9	8.8	8.3	8.8
72.5°	1.8	7.4	7.8	7.4	7.8
75°	1.8	6.9	6.9	6.9	6.9
77.5°	1.8	6.4	6.4	6.0	6.0
80°	1.8	5.5	5.5	5.5	5.1
82.5°	1.8	5.1	5.1	5.1	4.1
85°	1.8	4.6	4.6	4.6	3.7
87.5°	1.4	4.1	4.6	4.1	2.8
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1059600  
 CATALOG NUMBER: S123RDRP-H340D850-X4F0-XX-UDD-BVL-W

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.00	0.00	0.00	0.00	11.52	12.77	11.88	13.08	13.40
	3H	0.00	0.69	0.00	1.02	1.38	11.60	12.71	11.98	13.04	13.41
	4H	0.67	1.71	1.08	2.06	2.44	11.68	12.71	12.08	13.06	13.44
	6H	1.65	2.60	2.06	2.97	3.36	11.78	12.73	12.20	13.10	13.50
	8H	2.12	3.02	2.55	3.41	3.82	11.84	12.74	12.27	13.13	13.53
	12H	2.67	3.53	3.11	3.91	4.34	11.92	12.78	12.35	13.16	13.59
4H	2H	0.50	1.54	0.91	1.89	2.27	11.37	12.40	11.77	12.76	13.14
	3H	2.83	3.67	3.24	4.08	4.48	11.55	12.39	11.96	12.80	13.20
	4H	4.20	4.95	4.63	5.37	5.82	11.70	12.45	12.14	12.88	13.32
	6H	5.27	5.92	5.73	6.37	6.83	11.93	12.58	12.39	13.02	13.49
	8H	5.72	6.33	6.19	6.78	7.25	12.05	12.66	12.52	13.11	13.58
	12H	6.21	6.75	6.70	7.23	7.71	12.22	12.76	12.71	13.25	13.72
8H	4H	5.17	5.78	5.64	6.22	6.70	11.70	12.31	12.17	12.75	13.22
	6H	6.68	7.18	7.18	7.68	8.16	12.03	12.53	12.54	13.03	13.51
	8H	7.46	7.91	7.98	8.42	8.92	12.27	12.72	12.79	13.23	13.73
	12H	8.26	8.66	8.78	9.15	9.73	12.60	13.00	13.12	13.50	14.07
12H	4H	5.34	5.88	5.83	6.37	6.84	11.68	12.22	12.17	12.70	13.18
	6H	7.00	7.45	7.52	7.96	8.46	12.05	12.50	12.58	13.02	13.51
	8H	7.96	8.36	8.48	8.85	9.43	12.36	12.76	12.88	13.26	13.83