

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1059603

Luminaire Tested: S123RDRP-H340D850-X4F0-XX-UDD-SVL-W

Issue Date: 8/7/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1059603  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-65)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/7/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123RDRP-H340D850-X4F0-XX-UDD-SVL-W  
Description: DEFINE 3 WHITE REGRESSED DIRECT RECESSED HOUSING WITH SILVER STRAIGHT BLADE LOUVER WITH DIFFUSER  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 5000K CCT, 80 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 497.6 lumens  
Efficiency: N/A  
Efficacy: 42.5 lumens/watt  
Spacing Criteria (0/90/45): 0.82 / 1.08 / 0.98  
Luminous Opening: Rectangular (W 0.23' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 11.7  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1059603

CATALOG NUMBER: S123RDRP-H340D850-X4F0-XX-UDD-SVL-W

### Luminous Intensity Polar Plot

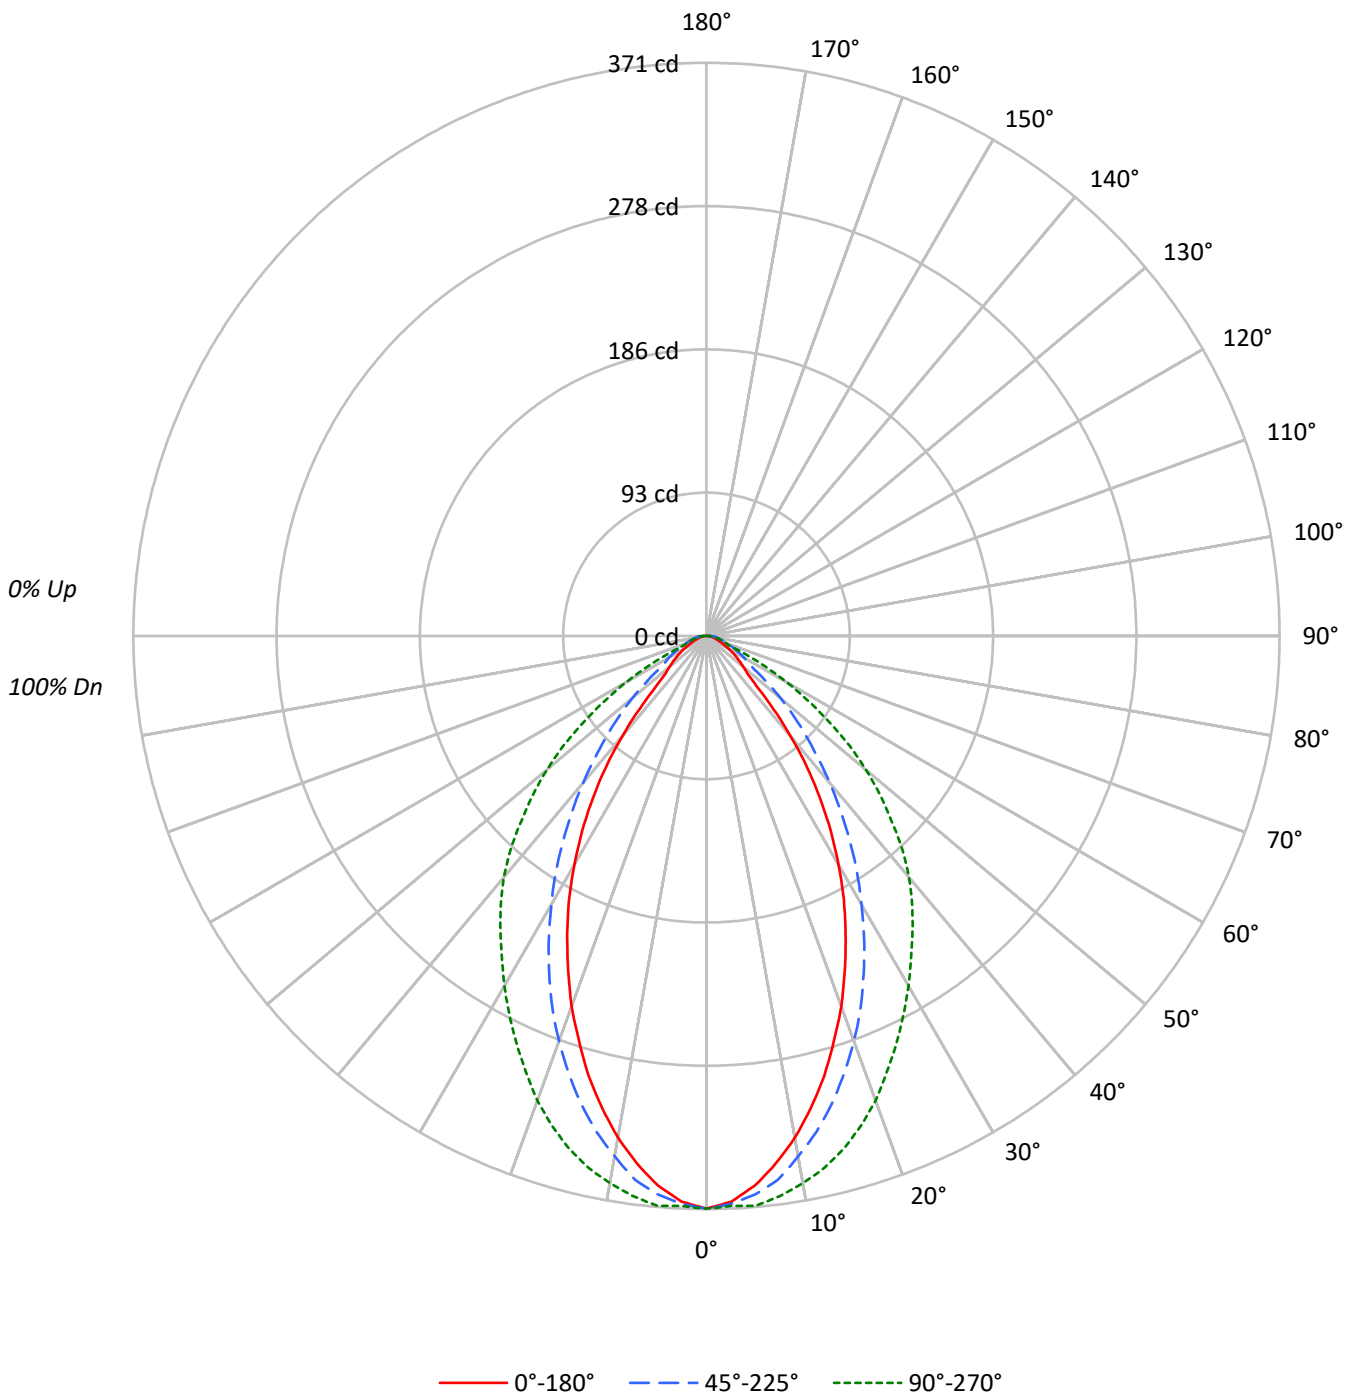

TEST NUMBER: P1059603

CATALOG NUMBER: S123RDRP-H340D850-X4F0-XX-UDD-SVL-W

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																			
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																												
1	111	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	89																												
2	104	98	92	88	102	96	91	87	92	88	85	89	86	83	86	84	81	79																												
3	97	89	82	77	95	87	81	77	84	79	75	82	78	74	79	76	73	71																												
4	90	81	74	68	88	80	73	68	77	72	67	75	70	66	73	69	66	64																												
5	85	74	67	61	83	73	66	61	71	65	60	69	64	60	68	63	59	58																												
6	79	68	61	55	78	67	60	55	66	59	55	64	59	54	63	58	54	52																												
7	74	63	56	51	73	62	55	50	61	55	50	60	54	50	58	53	49	48																												
8	70	58	51	46	69	58	51	46	57	50	46	55	50	46	54	49	45	44																												
9	66	54	47	43	65	54	47	43	53	47	42	52	46	42	51	46	42	40																												
10	62	51	44	39	61	50	44	39	49	43	39	49	43	39	48	43	39	37																												

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	4353	4353	4353
5°	4212	4278	4364
10°	3931	4079	4288
15°	3583	3812	4176
20°	3188	3488	3999
25°	2762	3120	3770
30°	2316	2723	3547
35°	1835	2317	3333
40°	1298	1905	3127
45°	764	1506	2815
50°	572	1144	2464
55°	481	774	1980
60°	390	660	1407
65°	308	564	742
70°	268	491	460
75°	250	458	440
80°	250	500	433
85°	310	741	552

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 2815 cd/sqm



TEST NUMBER: P1059603

CATALOG NUMBER: S123RDRP-H340D850-X4F0-XX-UDD-SVL-W

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	34.1	6.9
10°-20°	88.7	17.8
20°-30°	112.9	22.7
30°-40°	106.2	21.3
40°-50°	76.5	15.4
50°-60°	44.2	8.9
60°-70°	20.2	4.1
70°-80°	10.1	2.0
80°-90°	4.8	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	235.7	47.4
0°-40°	341.9	68.7
0°-60°	462.6	93.0
0°-90°	497.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	497.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	371	371	371	371	371	
5°	357	363	363	366	370	33
15°	295	305	314	331	344	82
25°	213	224	241	268	291	98
35°	128	139	162	199	232	79
45°	46	58	91	136	170	39
55°	24	24	38	72	97	21
65°	11	16	20	23	27	11
75°	6	11	10	10	10	6
85°	2	5	6	5	4	2
90°	0	0	0	0	0	



TEST NUMBER: P1059603

CATALOG NUMBER: S123RDRP-H340D850-X4F0-XX-UDD-SVL-W

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	370.7	370.7	370.7	370.7	370.7
2.5°	366.5	371.2	367.9	368.4	369.3
5°	357.3	363.3	362.9	366.5	370.2
7.5°	344.4	351.4	355.0	360.6	365.6
10°	329.7	337.5	342.1	352.3	359.6
12.5°	312.7	322.8	328.8	342.1	352.7
15°	294.7	305.3	313.6	331.1	343.5
17.5°	274.5	286.0	296.6	317.3	332.5
20°	255.1	266.2	279.1	301.6	320.0
22.5°	233.9	245.9	260.6	284.6	305.3
25°	213.2	224.3	240.8	267.5	291.0
27.5°	192.5	203.5	221.0	250.5	276.3
30°	170.8	182.4	200.8	233.5	261.6
32.5°	149.7	160.7	181.4	216.9	246.4
35°	128.0	139.1	161.6	198.9	232.5
37.5°	106.8	118.3	142.3	184.2	218.7
40°	84.7	97.2	124.3	169.0	204.0
42.5°	64.0	77.4	106.4	153.3	187.9
45°	46.0	57.6	90.7	136.3	169.5
47.5°	35.9	41.9	76.4	118.8	152.4
50°	31.3	32.2	62.6	102.7	134.9
52.5°	27.2	28.1	49.3	87.5	116.5
55°	23.5	24.4	37.8	71.8	96.7
57.5°	19.8	21.2	31.3	57.1	77.8
60°	16.6	18.4	28.1	43.7	59.9
62.5°	13.4	16.6	23.9	32.2	42.8
65°	11.1	15.7	20.3	22.6	26.7
67.5°	9.2	14.3	17.0	16.1	15.7
70°	7.8	12.9	14.3	12.9	13.4
72.5°	6.4	12.0	12.0	11.1	11.1
75°	5.5	10.6	10.1	9.7	9.7
77.5°	4.6	9.2	8.7	8.3	7.8
80°	3.7	7.4	7.4	6.9	6.4
82.5°	3.2	6.0	6.0	6.0	5.1
85°	2.3	5.1	5.5	5.1	4.1
87.5°	1.8	4.6	4.6	4.1	2.8
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1059603  
 CATALOG NUMBER: S123RDRP-H340D850-X4F0-XX-UDD-SVL-W

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.08	6.40	5.45	6.72	7.03	12.44	13.76	12.81	14.07	14.39
	3H	6.47	7.64	6.85	7.97	8.34	12.67	13.84	13.05	14.17	14.54
	4H	7.02	8.11	7.42	8.46	8.85	12.79	13.88	13.19	14.23	14.61
	6H	7.46	8.46	7.87	8.83	9.22	12.90	13.91	13.32	14.28	14.67
	8H	7.63	8.58	8.06	8.97	9.38	12.96	13.90	13.39	14.30	14.70
	12H	7.79	8.70	8.22	9.08	9.51	13.01	13.92	13.45	14.31	14.74
4H	2H	6.19	7.28	6.59	7.63	8.01	12.40	13.49	12.80	13.84	14.23
	3H	7.85	8.74	8.26	9.15	9.55	12.76	13.66	13.18	14.06	14.46
	4H	8.66	9.46	9.09	9.88	10.32	12.96	13.76	13.40	14.18	14.62
	6H	9.29	9.98	9.76	10.43	10.90	13.19	13.88	13.65	14.32	14.79
	8H	9.53	10.17	10.00	10.62	11.09	13.29	13.94	13.76	14.38	14.86
	12H	9.74	10.31	10.23	10.80	11.27	13.42	13.99	13.91	14.47	14.95
8H	4H	9.10	9.74	9.57	10.19	10.66	13.00	13.64	13.47	14.09	14.56
	6H	10.01	10.54	10.51	11.04	11.52	13.33	13.86	13.83	14.35	14.83
	8H	10.43	10.91	10.95	11.42	11.91	13.52	13.99	14.04	14.51	15.00
	12H	10.85	11.27	11.36	11.77	12.34	13.77	14.19	14.28	14.68	15.25
12H	4H	9.15	9.73	9.64	10.21	10.68	12.99	13.56	13.47	14.04	14.52
	6H	10.15	10.62	10.67	11.14	11.63	13.34	13.82	13.86	14.33	14.83
	8H	10.68	11.11	11.20	11.60	12.17	13.60	14.02	14.11	14.52	15.09