

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1059763

Luminaire Tested: S123RDRP-H775D850-X4F0-XX-UDD-SVL-B

Issue Date: 8/7/2025

Test Information

Test Method: LM-79-2024
Report Number: P1059763
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2406-143-29)
Test Lab: INNOVATION CENTER
Issue Date: 8/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123RDRP-H775D850-X4F0-XX-UDD-SVL-B
Description: DEFINE 3 BLACK REGRESSED DIRECT RECESSED HOUSING WITH SILVER STRAIGHT BLADE
LOUVER WITH DIFFUSER
HIGH PERFORMANCE LIGHT ENGINE
Light Source: 5000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 855.4 lumens
Efficiency: N/A
Efficacy: 36.4 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 0.85 / 0.98
Luminous Opening: Rectangular (W 0.23' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 23.5
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1059763

CATALOG NUMBER: S123RDRP-H775D850-X4F0-XX-UDD-SVL-B

Luminous Intensity Polar Plot

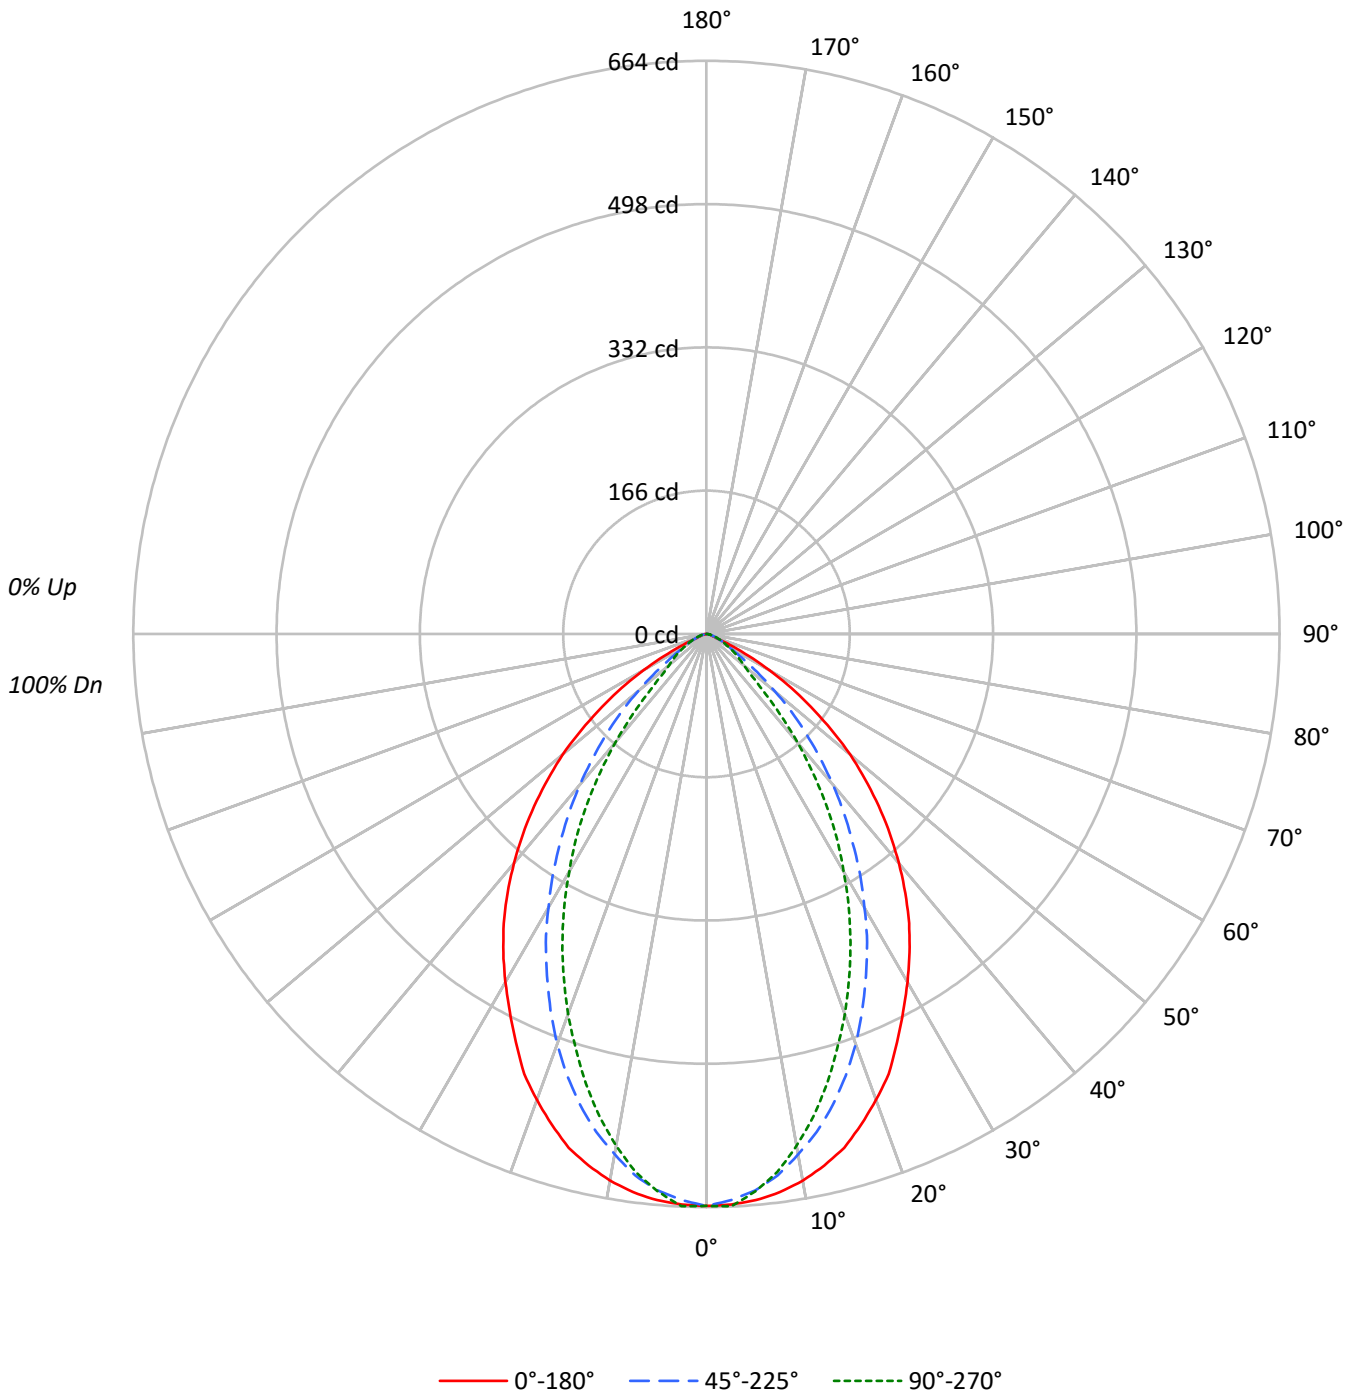



TEST NUMBER: P1059763

CATALOG NUMBER: S123RDRP-H775D850-X4F0-XX-UDD-SVL-B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	112	109	106	103	110	107	104	102	103	100	98	99	97	95	95	94	93	91				91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	86	83	82				82
3	98	90	84	80	96	89	83	79	86	82	78	84	80	76	81	78	75	73				73
4	92	83	76	71	90	82	75	70	79	74	70	77	73	69	75	71	68	66				66
5	86	76	69	64	84	75	68	63	73	67	63	71	66	62	70	65	62	60				60
6	81	70	63	58	79	69	62	58	68	62	57	66	61	57	65	60	56	55				55
7	76	65	58	53	74	64	57	53	63	57	52	61	56	52	60	55	52	50				50
8	71	60	53	48	70	60	53	48	58	52	48	57	52	48	56	51	48	46				46
9	67	56	49	45	66	56	49	44	55	48	44	54	48	44	53	48	44	42				42
10	64	52	46	41	63	52	46	41	51	45	41	50	45	41	49	44	41	39				39

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7781	7781	7781
5°	7762	7629	7641
10°	7668	7301	7179
15°	7493	6870	6559
20°	7178	6319	5857
25°	6765	5661	5116
30°	6314	4965	4312
35°	5866	4235	3470
40°	5314	3490	2515
45°	4685	2708	1516
50°	3971	1893	1030
55°	3024	1134	862
60°	1975	723	674
65°	825	542	542
70°	282	388	422
75°	231	281	327
80°	142	210	277
85°	135	135	283

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 4685 cd/sqm



TEST NUMBER: P1059763

CATALOG NUMBER: S123RDRP-H775D850-X4F0-XX-UDD-SVL-B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	61.2	7.2
10°-20°	160.1	18.7
20°-30°	205.4	24.0
30°-40°	192.7	22.5
40°-50°	134.4	15.7
50°-60°	69.5	8.1
60°-70°	23.8	2.8
70°-80°	6.8	0.8
80°-90°	1.4	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	426.7	49.9
0°-40°	619.4	72.4
0°-60°	823.4	96.3
0°-90°	855.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	855.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	663	663	663	663	663	
5°	658	658	647	650	648	62
15°	616	601	565	547	540	173
25°	522	489	437	407	395	240
35°	409	359	295	257	242	255
45°	282	231	163	113	91	217
55°	148	111	55	43	42	133
65°	30	26	20	18	20	35
75°	5	5	6	7	7	5
85°	1	1	1	1	2	1
90°	0	0	0	0	0	



TEST NUMBER: P1059763

CATALOG NUMBER: S123RDRP-H775D850-X4F0-XX-UDD-SVL-B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	662.6	662.6	662.6	662.6	662.6
2.5°	661.6	662.6	656.4	662.6	663.6
5°	658.5	657.5	647.2	650.3	648.2
7.5°	652.3	649.3	632.8	628.7	628.7
10°	643.1	636.9	612.3	605.2	602.1
12.5°	630.8	622.6	590.8	577.5	572.3
15°	616.4	601.0	565.1	546.7	539.5
17.5°	595.9	575.4	536.4	514.9	503.6
20°	574.4	548.7	505.7	480.0	468.7
22.5°	551.8	521.0	471.8	444.1	431.8
25°	522.1	489.2	436.9	407.2	394.9
27.5°	493.4	458.5	403.1	369.2	356.9
30°	465.7	424.6	366.2	333.3	318.0
32.5°	438.0	391.8	331.3	295.4	281.0
35°	409.2	359.0	295.4	257.4	242.1
37.5°	378.5	327.2	261.5	220.5	202.1
40°	346.7	293.3	227.7	181.5	164.1
42.5°	314.9	262.6	193.9	146.7	126.2
45°	282.1	230.8	163.1	112.8	91.3
47.5°	249.2	199.0	133.3	82.1	68.7
50°	217.4	169.2	103.6	60.5	56.4
52.5°	182.6	140.5	78.0	50.3	49.2
55°	147.7	110.8	55.4	43.1	42.1
57.5°	116.9	86.2	40.0	35.9	34.9
60°	84.1	61.5	30.8	29.7	28.7
62.5°	55.4	42.1	24.6	23.6	23.6
65°	29.7	25.6	19.5	18.5	19.5
67.5°	12.3	14.4	14.4	15.4	15.4
70°	8.2	9.2	11.3	12.3	12.3
72.5°	6.2	7.2	8.2	9.2	9.2
75°	5.1	5.1	6.2	7.2	7.2
77.5°	3.1	4.1	4.1	5.1	6.2
80°	2.1	3.1	3.1	4.1	4.1
82.5°	1.0	2.1	2.1	3.1	3.1
85°	1.0	1.0	1.0	1.0	2.1
87.5°	0.0	0.0	0.0	0.0	1.0
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P1059763

CATALOG NUMBER: S123RDRP-H775D850-X4F0-XX-UDD-SVL-B

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.46	14.72	13.83	15.03	15.35	6.97	8.23	7.33	8.54	8.85
	3H	13.41	14.52	13.80	14.85	15.22	7.74	8.85	8.12	9.18	9.55
	4H	13.36	14.39	13.77	14.74	15.13	7.94	8.97	8.35	9.33	9.71
	6H	13.29	14.24	13.71	14.61	15.00	8.09	9.03	8.50	9.40	9.80
	8H	13.25	14.14	13.68	14.53	14.94	8.13	9.02	8.56	9.41	9.81
	12H	13.21	14.06	13.64	14.44	14.87	8.14	9.00	8.58	9.38	9.81
4H	2H	13.31	14.34	13.71	14.69	15.07	7.22	8.25	7.63	8.60	8.99
	3H	13.29	14.13	13.71	14.53	14.94	8.13	8.97	8.54	9.37	9.77
	4H	13.24	13.98	13.68	14.41	14.85	8.40	9.15	8.84	9.57	10.01
	6H	13.19	13.82	13.65	14.27	14.74	8.62	9.26	9.09	9.71	10.18
	8H	13.13	13.73	13.60	14.18	14.65	8.68	9.28	9.15	9.73	10.20
	12H	13.09	13.61	13.58	14.10	14.57	8.72	9.25	9.21	9.73	10.21
8H	4H	13.13	13.72	13.60	14.17	14.64	8.39	8.98	8.86	9.43	9.90
	6H	13.07	13.55	13.57	14.05	14.53	8.66	9.14	9.16	9.64	10.12
	8H	13.02	13.45	13.54	13.97	14.46	8.77	9.20	9.29	9.72	10.21
	12H	12.98	13.36	13.50	13.86	14.43	8.84	9.23	9.36	9.72	10.30
12H	4H	13.08	13.61	13.57	14.09	14.57	8.35	8.87	8.84	9.36	9.83
	6H	13.01	13.44	13.53	13.96	14.46	8.62	9.06	9.14	9.57	10.07
	8H	12.98	13.36	13.50	13.86	14.43	8.76	9.15	9.28	9.64	10.21