

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1059644

Luminaire Tested: S123RDRP-H340D950-X4F0-XX-UDD-BVL-S

Issue Date: 8/7/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1059644  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-69)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/7/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123RDRP-H340D950-X4F0-XX-UDD-BVL-S  
Description: DEFINE 3 SILVER REGRESSED DIRECT RECESSED HOUSING WITH BLACK STRAIGHT BLADE  
LOUVER WITH DIFFUSER  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 5000K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 311.2 lumens  
Efficiency: N/A  
Efficacy: 26.6 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 1.06 / 0.94  
Luminous Opening: Rectangular (W 0.23' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 11.7  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1059644

CATALOG NUMBER: S123RDRP-H340D950-X4F0-XX-UDD-BVL-S

### Luminous Intensity Polar Plot

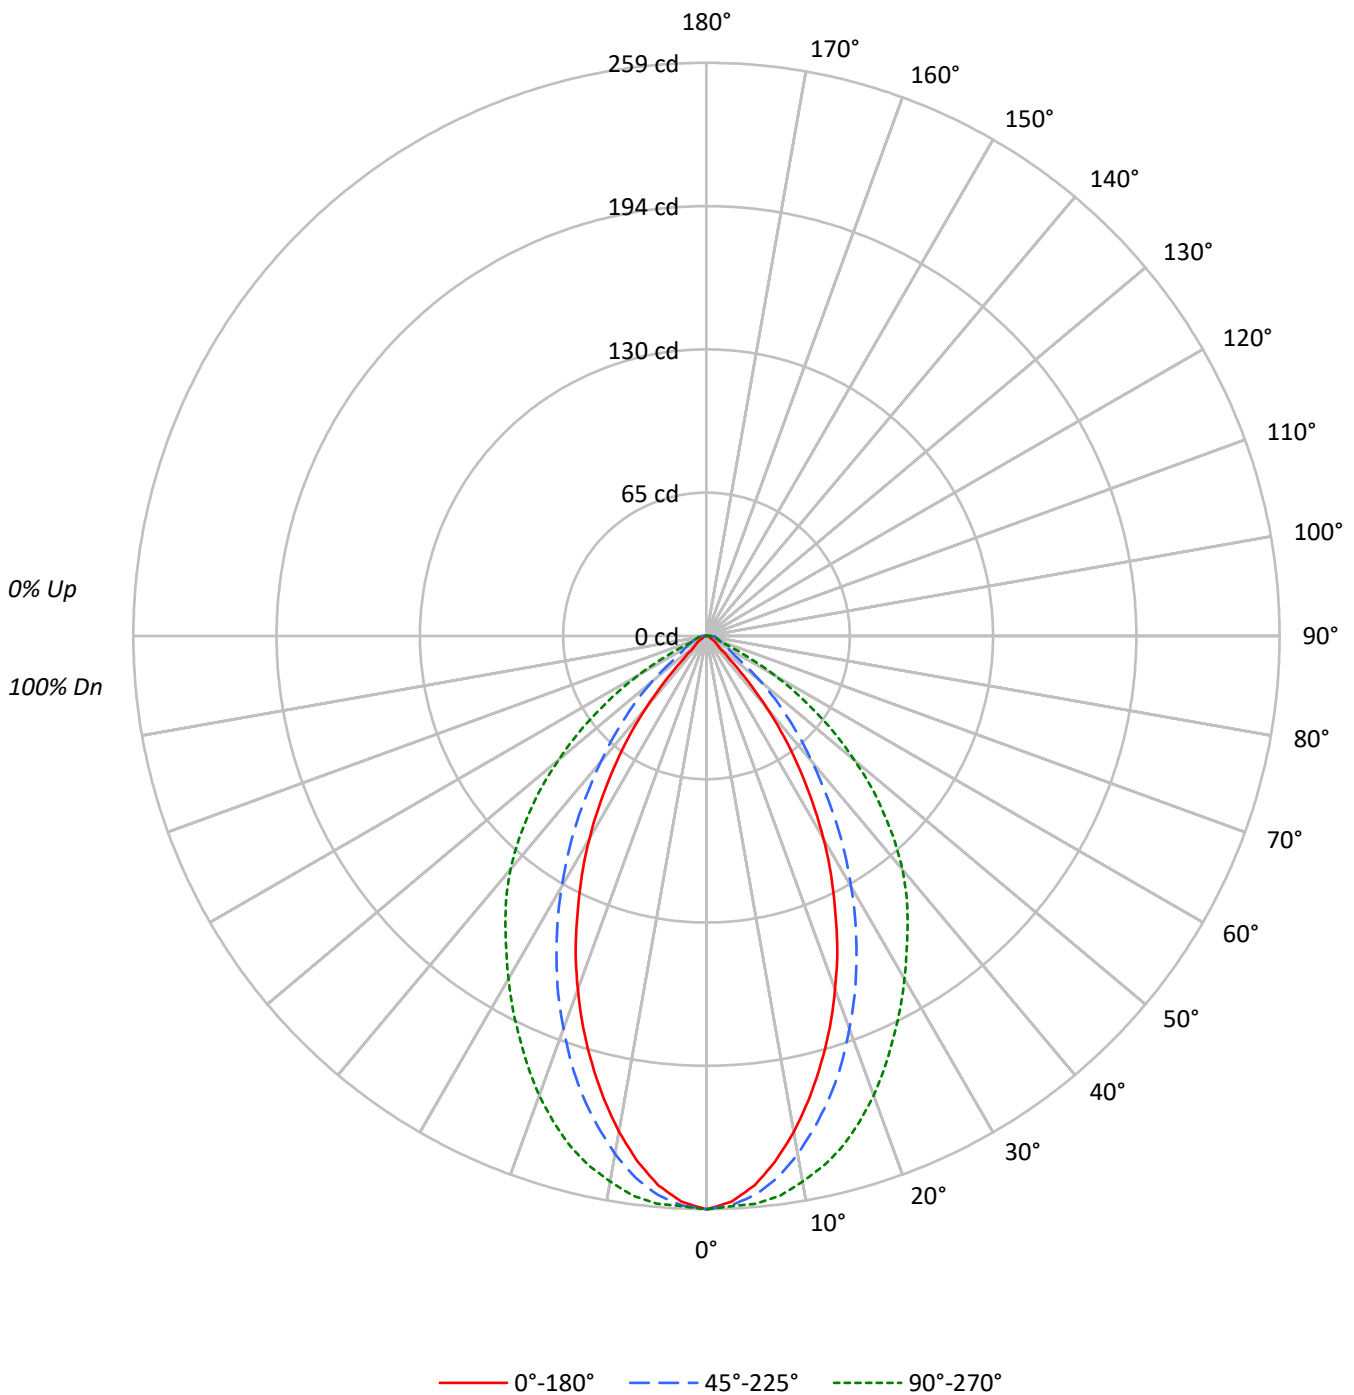



TEST NUMBER: P1059644

CATALOG NUMBER: S123RDRP-H340D950-X4F0-XX-UDD-BVL-S

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	98	98	96	95	95	93	92	90
2	105	99	94	89	102	97	92	88	94	90	86	90	87	85	88	85	83	81
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73
4	92	83	76	71	90	81	75	70	79	74	69	77	72	69	75	71	68	66
5	86	76	69	64	84	75	68	64	73	67	63	71	66	62	70	65	62	60
6	81	70	63	58	79	69	63	58	68	62	57	66	61	57	65	60	57	55
7	76	65	58	53	75	64	58	53	63	57	53	62	56	52	61	56	52	50
8	72	61	54	49	70	60	53	49	59	53	48	58	52	48	57	52	48	46
9	68	57	50	45	67	56	50	45	55	49	45	54	49	45	53	48	45	43
10	64	53	46	42	63	53	46	42	52	46	42	51	45	42	50	45	41	40

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3042	3042	3042
5°	2937	2988	3035
10°	2711	2834	2984
15°	2431	2620	2899
20°	2123	2361	2762
25°	1785	2078	2591
30°	1435	1772	2427
35°	1051	1459	2271
40°	650	1136	2112
45°	251	855	1881
50°	122	586	1591
55°	98	323	1249
60°	66	270	836
65°	56	242	375
70°	55	216	216
75°	73	231	218
80°	108	298	243
85°	162	485	323

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 1881 cd/sqm



TEST NUMBER: P1059644

CATALOG NUMBER: S123RDRP-H340D950-X4F0-XX-UDD-BVL-S

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	23.8	7.6
10°-20°	60.8	19.5
20°-30°	75.5	24.3
30°-40°	67.6	21.7
40°-50°	44.4	14.3
50°-60°	22.3	7.2
60°-70°	8.8	2.8
70°-80°	4.9	1.6
80°-90°	3.1	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	160.0	51.4
0°-40°	227.6	73.2
0°-60°	294.4	94.6
0°-90°	311.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	311.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	259	259	259	259	259	
5°	249	253	254	255	258	23
15°	200	206	216	230	238	56
25°	138	147	160	183	200	63
35°	73	83	102	133	158	45
45°	15	25	52	87	113	14
55°	5	6	16	43	61	4
65°	2	6	9	11	14	2
75°	2	5	5	5	5	2
85°	1	4	4	4	2	1
90°	0	0	0	0	0	



TEST NUMBER: P1059644

CATALOG NUMBER: S123RDRP-H340D950-X4F0-XX-UDD-BVL-S

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	259.1	259.1	259.1	259.1	259.1
2.5°	255.9	259.5	257.5	257.5	257.9
5°	249.2	253.1	253.5	255.1	257.5
7.5°	239.3	244.4	246.8	251.5	255.1
10°	227.4	232.9	237.7	246.0	250.3
12.5°	214.3	219.8	227.0	238.5	245.2
15°	200.0	206.4	215.5	230.1	238.5
17.5°	185.4	191.7	202.8	219.4	230.1
20°	169.9	177.1	188.9	208.0	221.0
22.5°	154.5	162.4	175.1	195.7	210.7
25°	137.8	146.6	160.4	183.0	200.0
27.5°	122.0	131.1	145.8	170.3	189.7
30°	105.8	114.9	130.7	157.3	179.0
32.5°	89.1	99.4	116.1	145.0	168.3
35°	73.3	83.2	101.8	133.1	158.4
37.5°	57.8	67.7	87.1	121.6	148.5
40°	42.4	52.7	74.1	110.5	137.8
42.5°	27.7	38.4	62.6	99.4	126.0
45°	15.1	25.0	51.5	86.7	113.3
47.5°	8.3	13.5	41.6	74.9	101.0
50°	6.7	7.5	32.1	63.8	87.1
52.5°	5.5	6.3	23.0	53.1	74.5
55°	4.8	5.5	15.8	42.8	61.0
57.5°	4.0	4.8	12.7	32.9	47.9
60°	2.8	4.8	11.5	24.2	35.6
62.5°	2.4	4.8	9.9	16.6	23.8
65°	2.0	5.5	8.7	11.1	13.5
67.5°	1.6	5.5	7.5	7.1	7.1
70°	1.6	5.5	6.3	5.9	6.3
72.5°	1.6	5.9	5.9	5.5	5.5
75°	1.6	5.1	5.1	4.8	4.8
77.5°	1.6	4.8	4.8	4.4	4.4
80°	1.6	4.4	4.4	4.0	3.6
82.5°	1.6	4.0	4.0	3.6	3.2
85°	1.2	3.6	3.6	3.6	2.4
87.5°	1.2	3.2	3.6	3.2	2.0
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1059644

CATALOG NUMBER: S123RDRP-H340D950-X4F0-XX-UDD-BVL-S

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.00	0.00	0.00	0.00	10.41	11.67	10.78	11.98	12.30
	3H	0.00	0.00	0.00	0.31	0.67	10.49	11.60	10.87	11.93	12.30
	4H	0.02	1.05	0.42	1.41	1.79	10.55	11.59	10.96	11.94	12.33
	6H	1.09	2.04	1.50	2.41	2.80	10.66	11.61	11.07	11.98	12.37
	8H	1.63	2.53	2.07	2.93	3.33	10.72	11.62	11.15	12.01	12.42
	12H	2.12	2.98	2.55	3.36	3.79	10.79	11.65	11.22	12.03	12.46
4H	2H	0.00	0.64	0.01	0.99	1.37	10.27	11.31	10.68	11.66	12.05
	3H	2.03	2.88	2.45	3.28	3.69	10.44	11.29	10.86	11.69	12.10
	4H	3.37	4.13	3.80	4.55	4.99	10.57	11.33	11.01	11.75	12.20
	6H	4.53	5.18	4.99	5.63	6.10	10.80	11.45	11.26	11.90	12.36
	8H	5.05	5.66	5.52	6.11	6.58	10.92	11.53	11.39	11.98	12.45
	12H	5.51	6.05	6.00	6.53	7.01	11.09	11.63	11.57	12.11	12.59
8H	4H	4.29	4.90	4.76	5.35	5.82	10.58	11.19	11.05	11.64	12.11
	6H	5.93	6.43	6.43	6.92	7.41	10.92	11.42	11.42	11.91	12.40
	8H	6.76	7.21	7.29	7.73	8.22	11.15	11.60	11.67	12.12	12.61
	12H	7.55	7.95	8.07	8.45	9.02	11.48	11.88	12.00	12.37	12.95
12H	4H	4.47	5.01	4.95	5.49	5.97	10.57	11.11	11.05	11.59	12.07
	6H	6.25	6.70	6.77	7.21	7.71	10.95	11.40	11.47	11.92	12.41
	8H	7.27	7.67	7.78	8.16	8.73	11.26	11.66	11.78	12.16	12.73