

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1059648

Luminaire Tested: S123RDRP-H340D950-X4F0-XX-UDD-SVL-W

Issue Date: 8/7/2025

Test Information

Test Method: LM-79-2024
Report Number: P1059648
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-65)
Test Lab: INNOVATION CENTER
Issue Date: 8/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123RDRP-H340D950-X4F0-XX-UDD-SVL-W
Description: DEFINE 3 WHITE REGRESSED DIRECT RECESSED HOUSING WITH SILVER STRAIGHT BLADE
LOUVER WITH DIFFUSER
HIGH PERFORMANCE LIGHT ENGINE
Light Source: 5000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 428.1 lumens
Efficiency: N/A
Efficacy: 36.6 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 1.08 / 0.98
Luminous Opening: Rectangular (W 0.23' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 11.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1059648

CATALOG NUMBER: S123RDRP-H340D950-X4F0-XX-UDD-SVL-W

Luminous Intensity Polar Plot

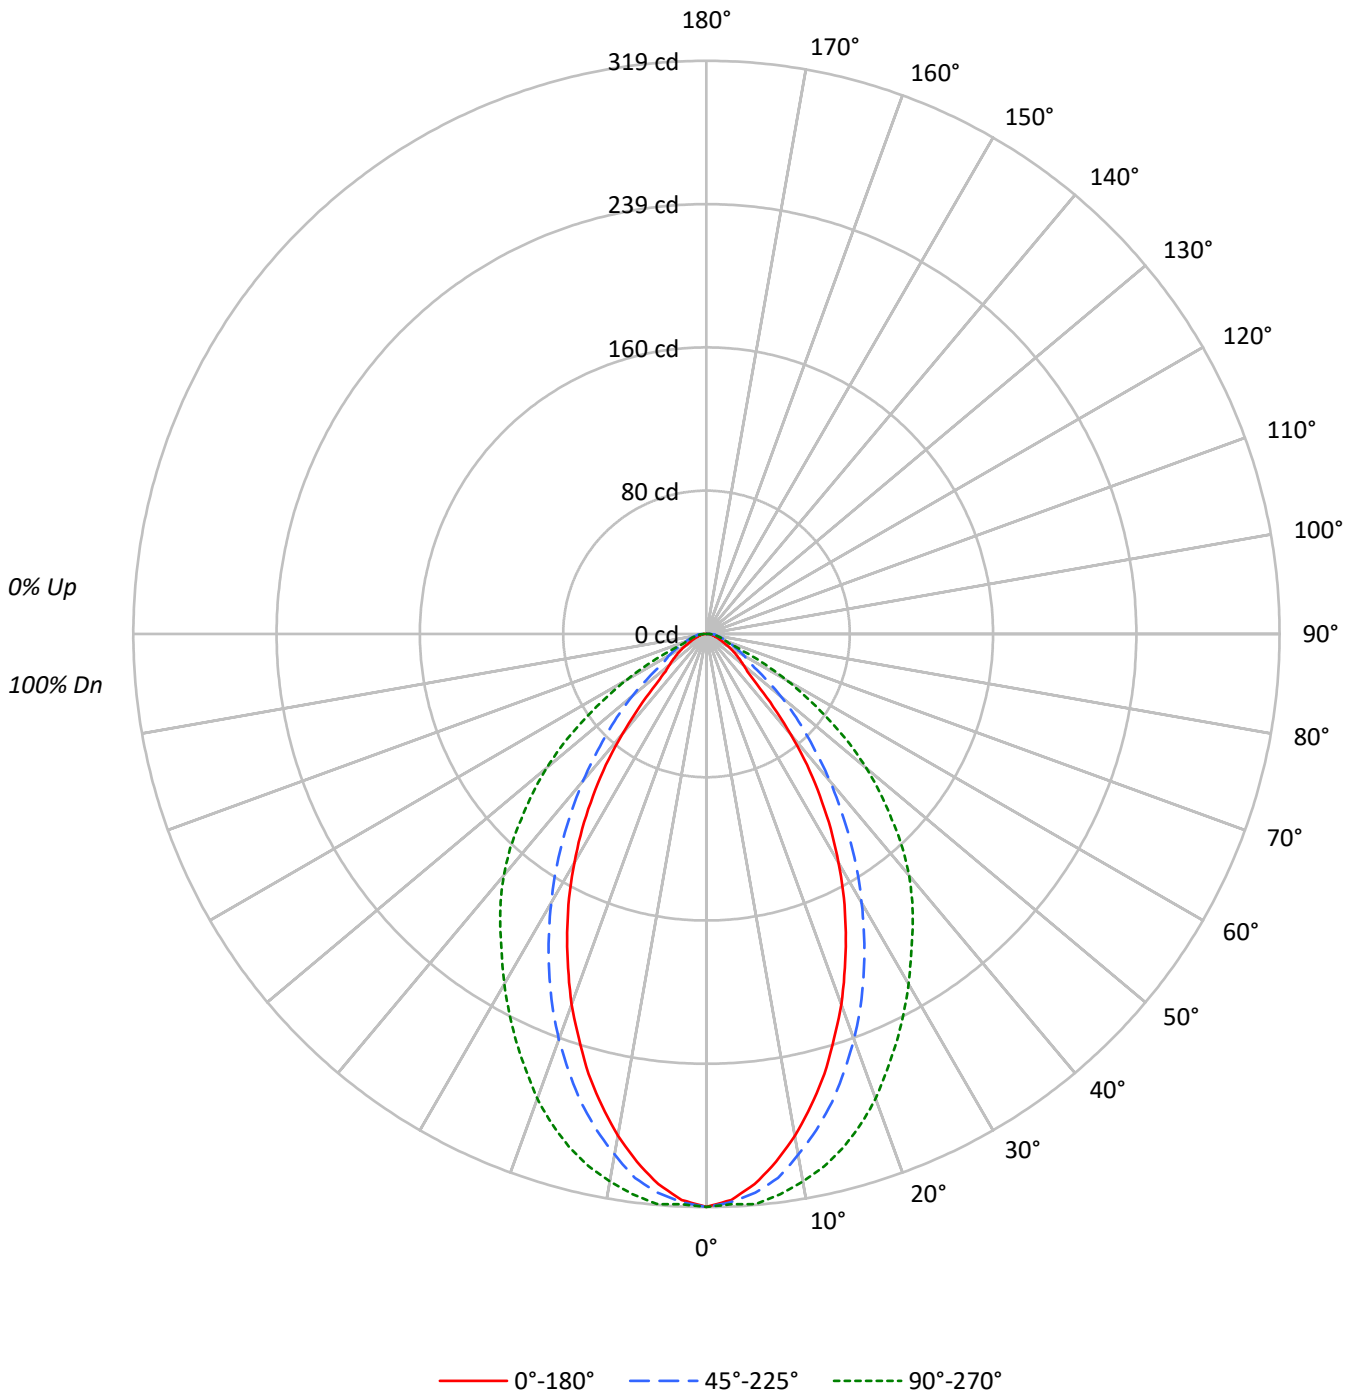



TEST NUMBER: P1059648

CATALOG NUMBER: S123RDRP-H340D950-X4F0-XX-UDD-SVL-W

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	111	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	89					89			
2	104	98	92	88	102	96	91	87	92	88	85	89	86	83	86	84	81	79					79			
3	97	89	82	77	95	87	81	77	84	79	75	82	78	74	79	76	73	71					71			
4	90	81	74	68	88	80	73	68	77	72	67	75	70	66	73	69	66	64					64			
5	85	74	67	61	83	73	66	61	71	65	60	69	64	60	68	63	59	58					58			
6	79	68	61	55	78	67	60	55	66	59	55	64	59	54	63	58	54	52					52			
7	74	63	56	51	73	62	55	50	61	55	50	60	54	50	58	53	49	48					48			
8	70	58	51	46	69	58	51	46	57	50	46	55	50	46	54	49	45	44					44			
9	66	54	47	43	65	54	47	43	53	47	42	52	46	42	51	46	42	40					40			
10	62	51	44	39	61	50	44	39	49	43	39	49	43	39	48	43	39	37					37			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3745	3745	3745
5°	3623	3679	3754
10°	3382	3509	3689
15°	3082	3280	3592
20°	2743	3000	3440
25°	2376	2685	3244
30°	1993	2342	3051
35°	1578	1993	2867
40°	1117	1640	2690
45°	658	1295	2421
50°	491	985	2121
55°	414	665	1703
60°	336	568	1209
65°	264	483	639
70°	230	422	395
75°	218	395	377
80°	216	426	372
85°	269	647	485

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 2421 cd/sqm



TEST NUMBER: P1059648

CATALOG NUMBER: S123RDRP-H340D950-X4F0-XX-UDD-SVL-W

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	29.3	6.9
10°-20°	76.3	17.8
20°-30°	97.1	22.7
30°-40°	91.4	21.3
40°-50°	65.8	15.4
50°-60°	38.0	8.9
60°-70°	17.4	4.1
70°-80°	8.7	2.0
80°-90°	4.1	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	202.8	47.4
0°-40°	294.1	68.7
0°-60°	397.9	93.0
0°-90°	428.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	428.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	319	319	319	319	319	
5°	307	312	312	315	318	29
15°	254	263	270	285	296	71
25°	183	193	207	230	250	84
35°	110	120	139	171	200	68
45°	40	50	78	117	146	33
55°	20	21	32	62	83	18
65°	10	14	17	19	23	10
75°	5	9	9	8	8	5
85°	2	4	5	4	4	2
90°	0	0	0	0	0	



TEST NUMBER: P1059648

CATALOG NUMBER: S123RDRP-H340D950-X4F0-XX-UDD-SVL-W

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	318.9	318.9	318.9	318.9	318.9
2.5°	315.3	319.3	316.5	316.9	317.7
5°	307.4	312.5	312.1	315.3	318.5
7.5°	296.3	302.2	305.4	310.2	314.5
10°	283.6	290.4	294.3	303.0	309.4
12.5°	269.0	277.7	282.8	294.3	303.4
15°	253.5	262.6	269.8	284.8	295.5
17.5°	236.1	246.0	255.1	272.9	286.0
20°	219.5	229.0	240.1	259.5	275.3
22.5°	201.2	211.5	224.2	244.8	262.6
25°	183.4	192.9	207.2	230.2	250.4
27.5°	165.6	175.1	190.1	215.5	237.7
30°	147.0	156.9	172.7	200.8	225.0
32.5°	128.7	138.2	156.1	186.6	211.9
35°	110.1	119.6	139.0	171.1	200.0
37.5°	91.9	101.8	122.4	158.5	188.2
40°	72.9	83.6	107.0	145.4	175.5
42.5°	55.1	66.5	91.5	131.9	161.6
45°	39.6	49.5	78.0	117.3	145.8
47.5°	30.9	36.0	65.8	102.2	131.1
50°	26.9	27.7	53.9	88.3	116.1
52.5°	23.4	24.2	42.4	75.3	100.2
55°	20.2	21.0	32.5	61.8	83.2
57.5°	17.0	18.2	26.9	49.1	66.9
60°	14.3	15.8	24.2	37.6	51.5
62.5°	11.5	14.3	20.6	27.7	36.8
65°	9.5	13.5	17.4	19.4	23.0
67.5°	7.9	12.3	14.7	13.9	13.5
70°	6.7	11.1	12.3	11.1	11.5
72.5°	5.5	10.3	10.3	9.5	9.5
75°	4.8	9.1	8.7	8.3	8.3
77.5°	4.0	7.9	7.5	7.1	6.7
80°	3.2	6.3	6.3	5.9	5.5
82.5°	2.8	5.1	5.1	5.1	4.4
85°	2.0	4.4	4.8	4.4	3.6
87.5°	1.6	4.0	4.0	3.6	2.4
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1059648
 CATALOG NUMBER: S123RDRP-H340D950-X4F0-XX-UDD-SVL-W

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.55	5.87	4.91	6.18	6.49	11.92	13.24	12.28	13.55	13.86
	3H	5.94	7.11	6.32	7.44	7.80	12.15	13.32	12.53	13.65	14.01
	4H	6.49	7.59	6.90	7.94	8.32	12.26	13.35	12.67	13.70	14.09
	6H	6.93	7.94	7.35	8.31	8.70	12.38	13.38	12.79	13.75	14.14
	8H	7.11	8.06	7.54	8.45	8.86	12.43	13.38	12.86	13.77	14.17
	12H	7.27	8.18	7.70	8.56	8.99	12.49	13.40	12.92	13.78	14.21
4H	2H	5.65	6.74	6.05	7.09	7.47	11.87	12.97	12.28	13.32	13.70
	3H	7.31	8.21	7.73	8.61	9.01	12.24	13.13	12.65	13.53	13.94
	4H	8.13	8.92	8.56	9.34	9.79	12.43	13.23	12.87	13.65	14.09
	6H	8.76	9.45	9.22	9.90	10.37	12.66	13.35	13.12	13.79	14.26
	8H	9.00	9.64	9.47	10.09	10.56	12.76	13.41	13.23	13.85	14.32
	12H	9.21	9.79	9.70	10.27	10.74	12.89	13.46	13.38	13.95	14.42
8H	4H	8.57	9.21	9.03	9.66	10.13	12.47	13.12	12.94	13.56	14.03
	6H	9.47	10.00	9.98	10.50	10.98	12.79	13.32	13.30	13.82	14.30
	8H	9.89	10.37	10.41	10.88	11.37	12.98	13.46	13.50	13.97	14.47
	12H	10.31	10.74	10.83	11.23	11.80	13.24	13.66	13.75	14.15	14.72
12H	4H	8.62	9.19	9.11	9.68	10.15	12.46	13.03	12.95	13.51	13.99
	6H	9.61	10.08	10.13	10.60	11.09	12.81	13.29	13.33	13.80	14.29
	8H	10.14	10.56	10.66	11.06	11.63	13.06	13.49	13.58	13.98	14.55