

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1056208

Luminaire Tested: S124R3DRP-H795D927-X4F0-XX-UDD-F-B

Issue Date: 7/25/2025

Test Information

Test Method: LM-79-2024
Report Number: P1056208
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2503-402-8)
Test Lab: INNOVATION CENTER
Issue Date: 7/25/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S124R3DRP-H795D927-X4F0-XX-UDD-F-B
Description: DEFINE 4, BLACK 3-INCH REGRESSED DIRECT RECESSED HOUSING WITH FROSTED LENS
HIGH PERFORMANCE LIGHT ENGINE
Light Source: 2700K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1093.6 lumens
Efficiency: N/A
Efficacy: 46.0 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 0.81 / 0.97
Luminous Opening: Rectangular (W 0.31' x L: 3.9' x H: 0')
CIE Type: Direct

Input Watts (W): 23.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1056208

CATALOG NUMBER: S124R3DRP-H795D927-X4F0-XX-UDD-F-B

Luminous Intensity Polar Plot

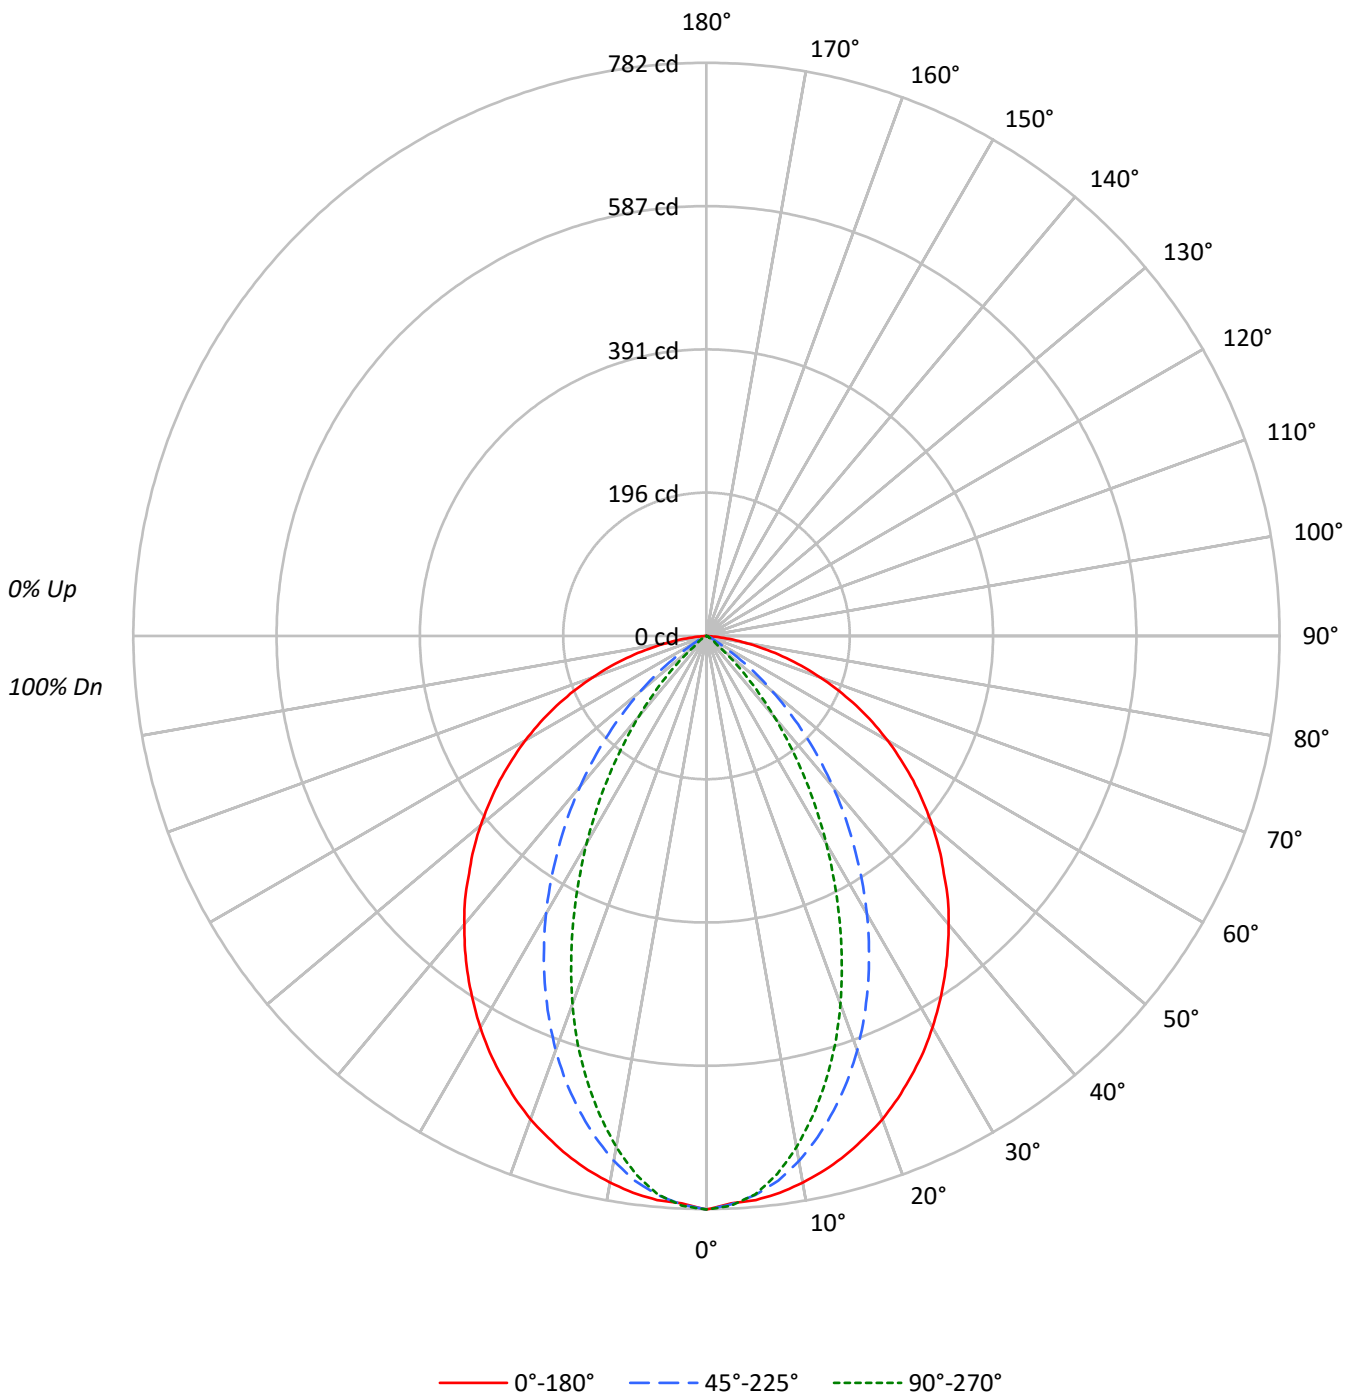



TEST NUMBER: P1056208

CATALOG NUMBER: S124R3DRP-H795D927-X4F0-XX-UDD-F-B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	95	93	92	90
2	104	98	93	88	102	96	91	87	93	89	85	90	86	83	87	84	82	80
3	97	89	82	77	95	87	81	77	84	79	75	82	78	74	79	76	73	71
4	90	81	74	68	88	80	73	68	77	72	67	75	70	66	73	69	65	64
5	84	74	66	61	83	73	66	61	71	65	60	69	64	60	67	63	59	57
6	79	68	60	55	77	67	60	55	65	59	54	64	58	54	62	57	54	52
7	74	63	55	50	73	62	55	50	60	54	50	59	53	49	58	53	49	47
8	70	58	51	46	68	57	50	46	56	50	45	55	49	45	54	49	45	43
9	66	54	47	42	64	53	47	42	52	46	42	51	46	42	50	45	41	40
10	62	50	43	39	61	50	43	39	49	43	39	48	42	39	47	42	38	37

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6918	6918	6918
5°	6856	6795	6788
10°	6798	6529	6357
15°	6713	6137	5757
20°	6604	5658	5031
25°	6458	5096	4199
30°	6297	4472	3336
35°	6119	3792	2484
40°	5932	3090	1656
45°	5727	2359	912
50°	5529	1615	253
55°	5309	876	165
60°	5047	271	95
65°	4718	176	48
70°	4263	80	21
75°	3669	27	0
80°	2775	0	0
85°	1167	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 5727 cd/sqm



TEST NUMBER: P1056208

CATALOG NUMBER: S124R3DRP-H795D927-X4F0-XX-UDD-F-B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	72.2	6.6
10°-20°	189.5	17.3
20°-30°	244.9	22.4
30°-40°	234.1	21.4
40°-50°	175.0	16.0
50°-60°	104.2	9.5
60°-70°	52.9	4.8
70°-80°	18.4	1.7
80°-90°	2.5	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	506.6	46.3
0°-40°	740.6	67.7
0°-60°	1019.8	93.3
0°-90°	1093.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1093.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	782	782	782	782	782	
5°	772	779	766	762	765	73
15°	733	718	670	639	629	207
25°	662	616	522	453	430	305
35°	567	489	351	262	230	355
45°	458	351	189	100	73	354
55°	344	214	57	13	11	307
65°	226	87	8	3	2	223
75°	107	12	1	1	0	114
85°	12	0	0	0	0	19
90°	0	0	0	0	0	



TEST NUMBER: P1056208

CATALOG NUMBER: S124R3DRP-H795D927-X4F0-XX-UDD-F-B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	782.5	782.5	782.5	782.5	782.5
2.5°	774.8	784.0	776.3	777.1	777.9
5°	772.5	778.6	765.6	761.8	764.8
7.5°	766.4	768.7	749.5	739.5	740.3
10°	757.2	754.9	727.2	710.4	708.1
12.5°	746.4	738.7	700.4	675.8	670.5
15°	733.4	718.0	670.5	639.0	629.0
17.5°	718.0	695.8	637.5	596.1	583.8
20°	701.9	671.2	601.4	550.0	534.7
22.5°	682.7	643.6	562.3	501.7	482.5
25°	662.0	616.0	522.4	453.4	430.4
27.5°	640.5	586.1	480.2	404.3	377.4
30°	616.8	554.6	438.0	354.4	326.8
32.5°	592.2	522.4	394.3	308.4	277.7
35°	566.9	488.7	351.3	261.6	230.1
37.5°	540.8	454.9	309.9	217.1	184.9
40°	514.0	420.4	267.7	174.9	143.5
42.5°	487.9	385.9	227.8	135.0	105.9
45°	458.0	351.3	188.7	100.5	72.9
47.5°	431.1	317.6	151.1	68.3	43.0
50°	402.0	281.5	117.4	39.9	18.4
52.5°	372.8	247.8	85.9	17.6	13.8
55°	344.4	214.0	56.8	13.0	10.7
57.5°	314.5	180.3	30.7	10.0	7.7
60°	285.4	147.3	15.3	7.7	5.4
62.5°	255.5	115.8	12.3	4.6	3.1
65°	225.5	86.7	8.4	3.1	2.3
67.5°	195.6	59.1	5.4	1.5	0.8
70°	164.9	36.1	3.1	0.8	0.8
72.5°	135.8	18.4	1.5	0.8	0.8
75°	107.4	11.5	0.8	0.8	0.0
77.5°	79.8	6.1	0.8	0.8	0.0
80°	54.5	2.3	0.0	0.0	0.0
82.5°	31.5	0.8	0.0	0.0	0.0
85°	11.5	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1056208
 CATALOG NUMBER: S124R3DRP-H795D927-X4F0-XX-UDD-F-B

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	17.18	18.50	17.54	18.82	19.13	0.00	0.00	0.00	0.00	0.00
	3H	18.72	19.89	19.10	20.22	20.59	0.00	0.00	0.00	0.00	0.00
	4H	19.31	20.41	19.71	20.76	21.14	0.00	0.00	0.00	0.00	0.00
	6H	19.73	20.73	20.14	21.11	21.50	0.00	0.00	0.00	0.00	0.00
	8H	19.83	20.78	20.26	21.17	21.58	0.00	0.00	0.00	0.00	0.00
	12H	19.85	20.76	20.28	21.14	21.57	0.00	0.00	0.00	0.00	0.00
4H	2H	16.95	18.05	17.36	18.40	18.78	0.00	0.00	0.00	0.00	0.00
	3H	18.52	19.41	18.93	19.81	20.22	0.00	0.00	0.00	0.00	0.00
	4H	19.10	19.90	19.53	20.32	20.76	0.00	0.00	0.00	0.00	0.00
	6H	19.56	20.25	20.02	20.69	21.16	0.00	0.00	0.00	0.00	0.00
	8H	19.68	20.32	20.15	20.77	21.24	0.00	0.00	0.00	0.00	0.00
	12H	19.72	20.29	20.21	20.77	21.24	0.00	0.00	0.00	0.00	0.00
8H	4H	18.96	19.60	19.43	20.05	20.52	0.00	0.00	0.00	0.00	0.04
	6H	19.40	19.93	19.91	20.42	20.90	0.00	0.00	0.00	0.00	0.00
	8H	19.52	19.99	20.04	20.51	21.00	0.00	0.00	0.00	0.00	0.00
	12H	19.57	19.98	20.09	20.48	21.05	0.00	0.00	0.00	0.00	0.00
12H	4H	18.92	19.48	19.40	19.97	20.44	0.00	0.00	0.00	0.00	0.41
	6H	19.34	19.81	19.86	20.33	20.82	0.00	0.00	0.00	0.00	0.26
	8H	19.48	19.89	19.99	20.39	20.96	0.00	0.00	0.00	0.00	0.22