

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1056200

Luminaire Tested: S124R3DRP-H795D835-X4F0-XX-UDD-F-S

Issue Date: 7/25/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1056200  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2503-402-9)  
Test Lab: INNOVATION CENTER  
Issue Date: 7/25/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S124R3DRP-H795D835-X4F0-XX-UDD-F-S  
Description: DEFINE 4, SILVER 3-INCH REGRESSED DIRECT RECESSED HOUSING WITH FROSTED LENS  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 3500K CCT, 80 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1681.7 lumens  
Efficiency: N/A  
Efficacy: 70.7 lumens/watt  
Spacing Criteria (0/90/45): 1.19 / 0.87 / 1.03  
Luminous Opening: Rectangular (W 0.31' x L: 3.9' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 23.8  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1056200

CATALOG NUMBER: S124R3DRP-H795D835-X4F0-XX-UDD-F-S

### Luminous Intensity Polar Plot

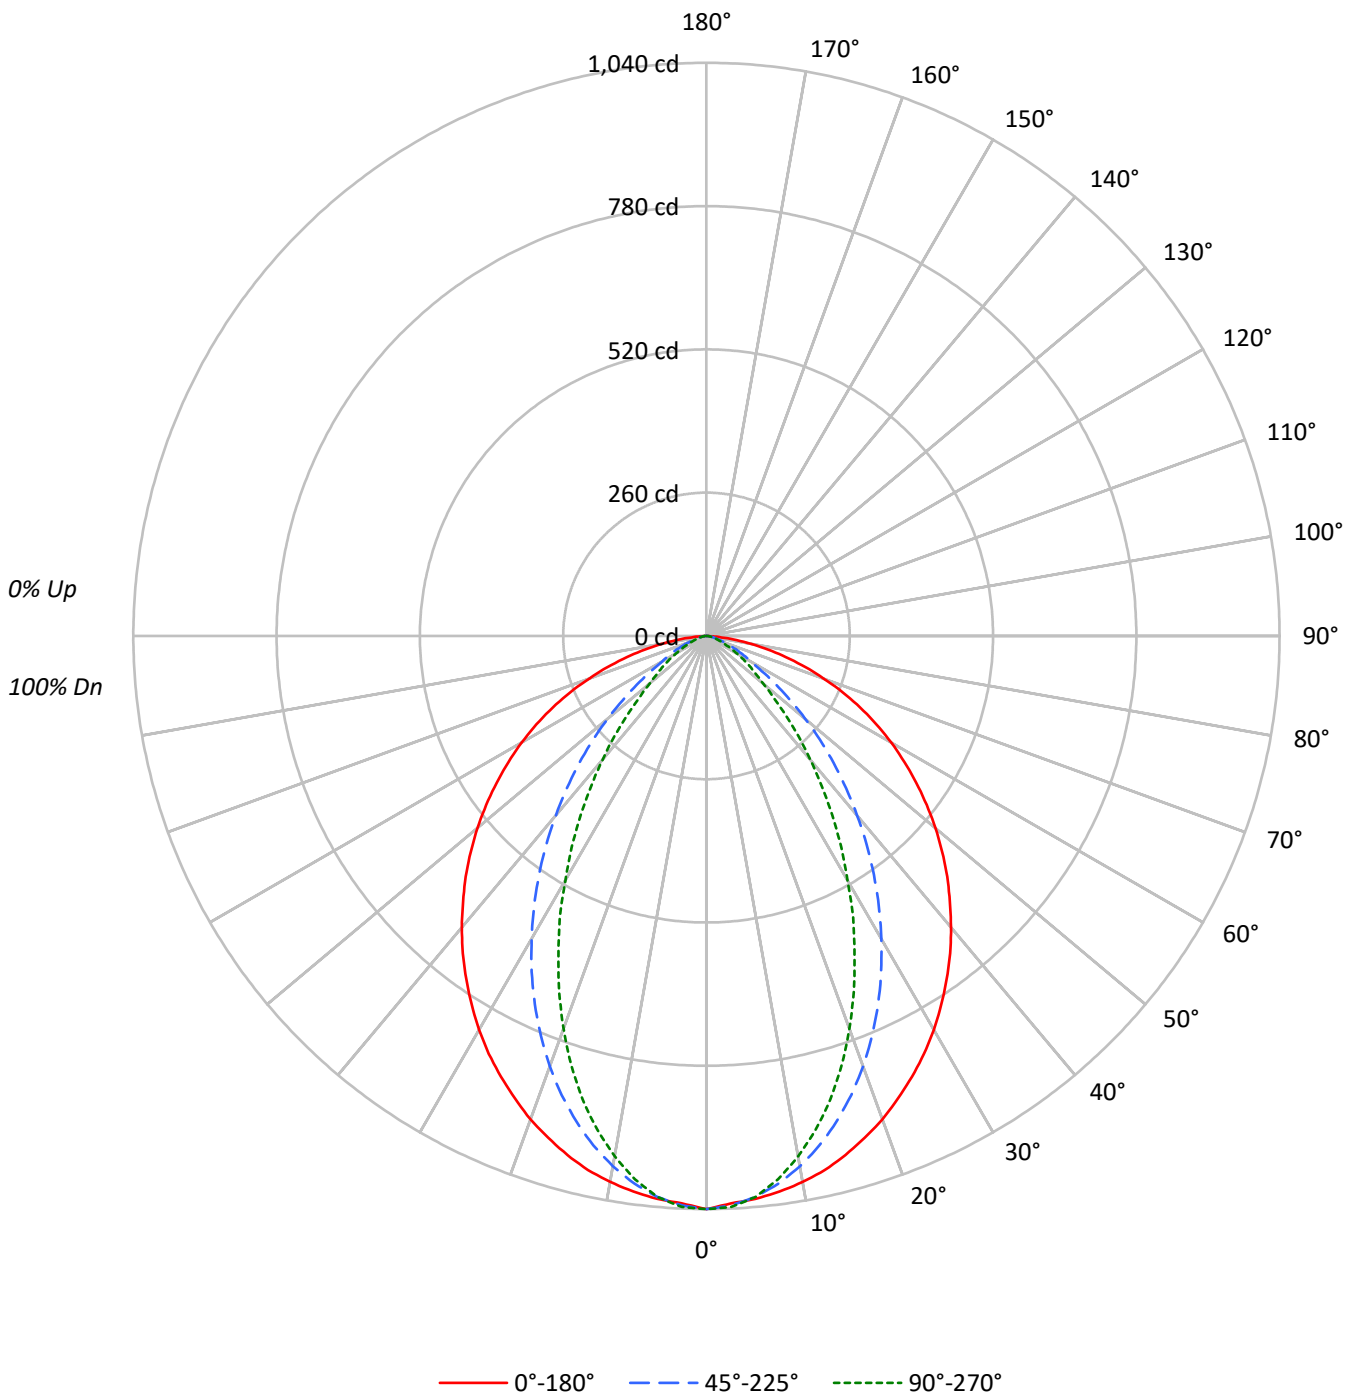

TEST NUMBER: P1056200

CATALOG NUMBER: S124R3DRP-H795D835-X4F0-XX-UDD-F-S

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	94	92	90	89					89			
2	103	96	91	86	101	94	89	85	91	87	83	88	84	81	85	82	79	78					78			
3	95	87	80	74	93	85	79	74	82	77	73	80	75	71	77	73	70	68					68			
4	89	78	71	65	86	77	70	65	75	69	64	73	67	63	71	66	62	60					60			
5	82	71	64	58	80	70	63	58	68	62	57	66	61	56	65	60	56	54					54			
6	77	65	57	52	75	64	57	52	63	56	51	61	55	51	60	54	50	48					48			
7	72	60	52	47	70	59	52	47	58	51	46	56	50	46	55	50	46	44					44			
8	67	55	48	42	66	55	47	42	53	47	42	52	46	42	51	46	42	40					40			
9	63	51	44	39	62	51	44	39	50	43	39	49	43	38	48	42	38	37					37			
10	60	48	41	36	59	47	40	36	46	40	36	45	40	35	45	39	35	34					34			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	9195	9195	9195
5°	9101	9067	9067
10°	9033	8772	8607
15°	8925	8350	7960
20°	8783	7818	7134
25°	8606	7189	6198
30°	8424	6476	5220
35°	8205	5717	4296
40°	7968	4906	3386
45°	7725	4080	2531
50°	7459	3210	1851
55°	7165	2374	1478
60°	6849	1644	1130
65°	6441	1276	831
70°	5832	902	651
75°	5093	629	495
80°	4094	494	443
85°	2262	396	396

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 7725 cd/sqm



TEST NUMBER: P1056200

CATALOG NUMBER: S124R3DRP-H795D835-X4F0-XX-UDD-F-S

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	96.5	5.7
10°-20°	257.8	15.3
20°-30°	343.8	20.4
30°-40°	346.2	20.6
40°-50°	283.9	16.9
50°-60°	194.0	11.5
60°-70°	108.4	6.4
70°-80°	43.0	2.6
80°-90°	8.2	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	698.0	41.5
0°-40°	1044.2	62.1
0°-60°	1522.1	90.5
0°-90°	1681.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1681.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1040	1040	1040	1040	1040	
5°	1026	1037	1022	1017	1022	97
15°	975	964	912	880	870	275
25°	882	839	737	662	635	406
35°	760	680	530	429	398	475
45°	618	504	326	230	202	476
55°	465	326	154	103	96	416
65°	308	155	61	44	40	304
75°	149	41	18	16	14	160
85°	22	4	4	4	4	31
90°	0	0	0	0	0	

TEST NUMBER: P1056200

CATALOG NUMBER: S124R3DRP-H795D835-X4F0-XX-UDD-F-S

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1040.0	1040.0	1040.0	1040.0	1040.0
2.5°	1030.3	1042.9	1034.2	1035.2	1037.1
5°	1025.5	1037.1	1021.6	1016.8	1021.6
7.5°	1016.8	1025.5	1002.3	992.6	994.5
10°	1006.1	1009.0	977.1	960.6	958.7
12.5°	992.6	988.7	947.1	922.9	917.0
15°	975.1	964.5	912.2	880.2	869.6
17.5°	954.8	936.4	873.5	831.8	816.3
20°	933.5	906.4	830.9	777.6	758.2
22.5°	908.3	874.4	785.3	720.5	698.2
25°	882.2	838.6	736.9	662.4	635.3
27.5°	855.1	801.8	686.6	603.3	576.2
30°	825.1	762.1	634.3	544.2	511.3
32.5°	793.1	721.4	582.0	486.1	455.1
35°	760.2	679.8	529.7	429.0	398.0
37.5°	726.3	637.2	477.4	374.8	343.8
40°	690.4	593.6	425.1	323.4	293.4
42.5°	653.7	549.1	374.8	275.0	246.9
45°	617.8	504.5	326.3	229.5	202.4
47.5°	580.1	460.0	278.9	186.9	163.7
50°	542.3	415.4	233.4	150.1	134.6
52.5°	503.6	370.9	191.7	123.0	112.3
55°	464.8	326.3	154.0	102.6	95.9
57.5°	426.1	281.8	119.1	87.2	79.4
60°	387.3	238.2	93.0	70.7	63.9
62.5°	347.6	194.6	76.5	56.2	50.4
65°	307.9	154.9	61.0	43.6	39.7
67.5°	268.2	118.1	46.5	33.9	31.0
70°	225.6	84.2	34.9	26.1	25.2
72.5°	188.8	57.1	25.2	20.3	19.4
75°	149.1	40.7	18.4	15.5	14.5
77.5°	115.2	26.1	13.6	12.6	11.6
80°	80.4	14.5	9.7	8.7	8.7
82.5°	49.4	7.7	6.8	5.8	5.8
85°	22.3	3.9	3.9	3.9	3.9
87.5°	3.9	1.9	1.9	1.9	1.9
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1056200  
 CATALOG NUMBER: S124R3DRP-H795D835-X4F0-XX-UDD-F-S

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	18.43	19.84	18.80	20.15	20.47	9.53	10.93	9.89	11.25	11.56
	3H	20.02	21.27	20.40	21.60	21.96	10.12	11.37	10.50	11.70	12.06
	4H	20.61	21.78	21.01	22.13	22.51	10.27	11.44	10.68	11.79	12.17
	6H	21.04	22.12	21.46	22.49	22.88	10.38	11.46	10.79	11.82	12.22
	8H	21.16	22.18	21.59	22.57	22.97	10.40	11.42	10.83	11.81	12.21
	12H	21.20	22.18	21.63	22.56	22.99	10.41	11.38	10.84	11.77	12.20
4H	2H	18.29	19.46	18.69	19.81	20.19	10.11	11.28	10.51	11.63	12.01
	3H	19.93	20.89	20.35	21.29	21.70	10.82	11.78	11.23	12.18	12.58
	4H	20.54	21.40	20.97	21.82	22.26	11.02	11.88	11.46	12.30	12.74
	6H	21.03	21.77	21.49	22.22	22.68	11.19	11.93	11.65	12.38	12.84
	8H	21.17	21.87	21.64	22.31	22.78	11.22	11.91	11.69	12.36	12.83
	12H	21.25	21.86	21.73	22.34	22.82	11.25	11.86	11.73	12.34	12.82
8H	4H	20.43	21.12	20.90	21.57	22.04	11.29	11.99	11.76	12.43	12.90
	6H	20.91	21.48	21.41	21.97	22.45	11.50	12.06	12.00	12.56	13.04
	8H	21.06	21.57	21.58	22.08	22.57	11.56	12.06	12.07	12.58	13.07
	12H	21.15	21.60	21.66	22.09	22.66	11.62	12.06	12.13	12.56	13.13
12H	4H	20.39	21.01	20.88	21.49	21.96	11.32	11.94	11.81	12.42	12.89
	6H	20.86	21.37	21.38	21.88	22.37	11.53	12.04	12.05	12.55	13.04
	8H	21.02	21.47	21.54	21.97	22.53	11.62	12.07	12.13	12.56	13.13