

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1060873

Luminaire Tested: S124RDRP-H575D830-X4F0-XX-UDD-WVL-B

Issue Date: 8/7/2025

Test Information

Test Method: LM-79-2024
Report Number: P1060873
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2406-143-37)
Test Lab: INNOVATION CENTER
Issue Date: 8/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S124RDRP-H575D830-X4F0-XX-UDD-WVL-B
Description: DEFINE 4 BLACK REGRESSED DIRECT RECESSED HOUSING WITH WHITE STRAIGHT BLADE
LOUVER WITH DIFFUSER
HIGH PERFORMANCE LIGHT ENGINE
Light Source: 3000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1005.4 lumens
Efficiency: N/A
Efficacy: 57.8 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 0.96 / 1.12
Luminous Opening: Rectangular (W 0.31' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 17.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1060873

CATALOG NUMBER: S124RDRP-H575D830-X4F0-XX-UDD-WVL-B

Luminous Intensity Polar Plot

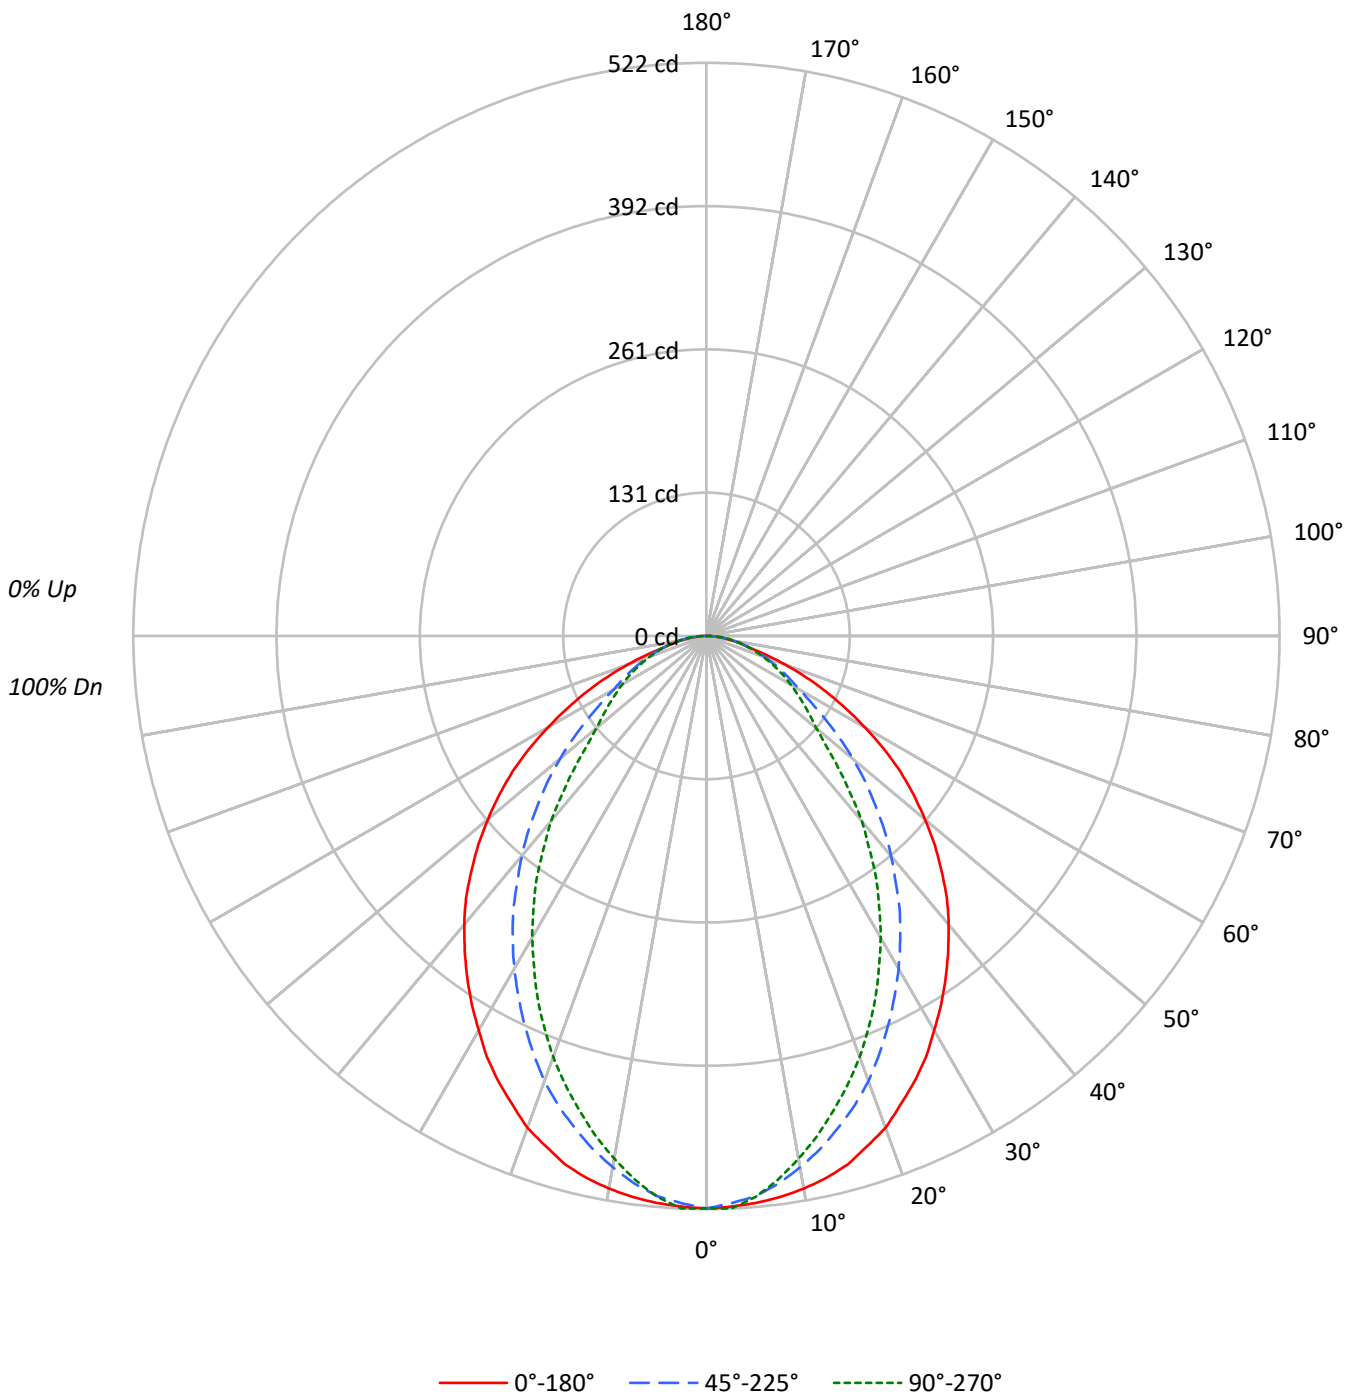



TEST NUMBER: P1060873

CATALOG NUMBER: S124RDRP-H575D830-X4F0-XX-UDD-WVL-B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	88					86				
2	101	94	88	83	99	92	86	82	89	84	80	85	82	78	82	79	76					74				
3	93	84	76	71	91	82	75	70	79	74	69	77	72	68	74	70	66					64				
4	86	75	67	61	84	74	67	61	72	65	60	69	64	59	67	62	58					56				
5	80	68	60	54	78	67	59	53	65	58	53	63	57	52	61	56	52					50				
6	74	62	54	48	72	61	53	47	59	52	47	58	51	47	56	51	46					44				
7	69	57	48	43	68	56	48	43	54	47	42	53	47	42	52	46	42					40				
8	65	52	44	39	63	51	44	39	50	43	38	49	43	38	48	42	38					36				
9	61	48	40	35	59	48	40	35	46	40	35	45	39	35	44	39	35					33				
10	57	45	37	32	56	44	37	32	43	37	32	42	36	32	41	36	32					30				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4490	4490	4490
5°	4481	4427	4433
10°	4468	4297	4227
15°	4441	4135	3988
20°	4368	3953	3740
25°	4256	3720	3458
30°	4124	3479	3156
35°	3994	3227	2834
40°	3857	2941	2473
45°	3686	2641	2067
50°	3480	2331	1748
55°	3238	1977	1618
60°	2871	1677	1529
65°	2447	1549	1449
70°	1913	1435	1372
75°	1304	1324	1324
80°	1126	1245	1274
85°	968	1215	1334

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 3686 cd/sqm



TEST NUMBER: P1060873

CATALOG NUMBER: S124RDRP-H575D830-X4F0-XX-UDD-WVL-B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	48.5	4.8
10°-20°	131.7	13.1
20°-30°	182.9	18.2
30°-40°	196.1	19.5
40°-50°	173.7	17.3
50°-60°	130.9	13.0
60°-70°	84.8	8.4
70°-80°	43.5	4.3
80°-90°	13.4	1.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	363.2	36.1
0°-40°	559.2	55.6
0°-60°	863.8	85.9
0°-90°	1005.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1005.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	521	521	521	521	521	
5°	518	519	512	513	513	49
15°	498	487	464	452	447	140
25°	448	424	392	371	364	206
35°	380	346	307	279	270	238
45°	303	264	217	183	170	233
55°	216	180	132	111	108	192
65°	120	97	76	72	71	119
75°	39	41	40	40	40	46
85°	10	10	12	14	14	11
90°	0	0	0	0	0	



TEST NUMBER: P1060873

CATALOG NUMBER: S124RDRP-H575D830-X4F0-XX-UDD-WVL-B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	521.4	521.4	521.4	521.4	521.4
2.5°	520.2	522.0	517.1	520.8	522.0
5°	518.4	519.0	512.2	512.8	512.8
7.5°	515.3	514.1	503.0	500.0	499.4
10°	511.0	507.3	491.4	485.3	483.4
12.5°	505.5	498.8	478.5	470.0	466.3
15°	498.1	487.1	463.8	452.2	447.3
17.5°	487.1	473.0	448.5	433.8	428.3
20°	476.7	457.7	431.4	413.0	408.1
22.5°	462.0	441.8	411.7	392.1	386.0
25°	447.9	424.0	391.5	370.7	364.0
27.5°	432.6	405.6	370.7	348.6	340.1
30°	414.8	386.0	349.9	326.6	317.4
32.5°	397.7	367.0	328.4	302.7	292.9
35°	379.9	345.6	307.0	279.4	269.6
37.5°	361.5	325.4	283.1	256.1	243.2
40°	343.1	305.1	261.6	231.0	220.0
42.5°	324.1	284.3	239.6	207.7	193.6
45°	302.7	263.5	216.9	183.2	169.7
47.5°	281.9	243.2	196.1	159.3	147.1
50°	259.8	221.8	174.0	138.5	130.5
52.5°	237.7	199.7	152.6	122.5	118.9
55°	215.7	179.5	131.7	110.9	107.8
57.5°	191.2	158.7	113.4	100.5	98.0
60°	166.7	136.0	97.4	90.7	88.8
62.5°	142.8	116.4	86.4	80.9	79.7
65°	120.1	96.8	76.0	71.7	71.1
67.5°	98.0	79.7	66.2	63.7	62.5
70°	76.0	63.7	57.0	55.8	54.5
72.5°	56.4	51.5	48.4	47.8	47.2
75°	39.2	41.1	39.8	39.8	39.8
77.5°	31.2	31.9	32.5	33.1	32.5
80°	22.7	24.5	25.1	26.3	25.7
82.5°	15.9	17.2	19.0	19.6	20.2
85°	9.8	10.4	12.3	13.5	13.5
87.5°	4.3	4.9	6.1	7.4	8.0
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1060873
 CATALOG NUMBER: S124RDRP-H575D830-X4F0-XX-UDD-WVL-B

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.66	17.16	16.02	17.47	17.78	12.22	13.72	12.59	14.03	14.35
	3H	16.86	18.21	17.24	18.53	18.90	13.92	15.26	14.30	15.59	15.95
	4H	17.17	18.43	17.57	18.78	19.16	14.59	15.85	14.99	16.20	16.58
	6H	17.37	18.54	17.78	18.90	19.29	15.14	16.31	15.56	16.67	17.07
	8H	17.43	18.54	17.86	18.93	19.33	15.36	16.47	15.79	16.86	17.26
	12H	17.46	18.52	17.89	18.90	19.33	15.53	16.59	15.96	16.98	17.40
4H	2H	15.80	17.06	16.20	17.41	17.79	12.88	14.14	13.28	14.49	14.87
	3H	17.20	18.25	17.61	18.65	19.05	14.79	15.84	15.20	16.24	16.64
	4H	17.63	18.57	18.06	18.98	19.42	15.59	16.53	16.03	16.95	17.39
	6H	17.95	18.77	18.41	19.21	19.67	16.28	17.10	16.74	17.54	18.00
	8H	18.05	18.81	18.51	19.26	19.73	16.55	17.32	17.02	17.76	18.23
	12H	18.12	18.80	18.60	19.28	19.75	16.78	17.47	17.27	17.95	18.42
8H	4H	17.76	18.52	18.22	18.96	19.43	15.91	16.67	16.37	17.12	17.59
	6H	18.18	18.81	18.67	19.30	19.78	16.74	17.37	17.24	17.86	18.34
	8H	18.33	18.90	18.85	19.41	19.90	17.10	17.67	17.62	18.18	18.67
	12H	18.46	18.96	18.97	19.46	20.02	17.44	17.94	17.95	18.43	19.00
12H	4H	17.76	18.44	18.24	18.92	19.39	15.94	16.62	16.42	17.10	17.57
	6H	18.20	18.77	18.72	19.28	19.77	16.80	17.37	17.31	17.88	18.36
	8H	18.41	18.91	18.92	19.40	19.97	17.23	17.73	17.74	18.22	18.79