

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1060952

Luminaire Tested: S124RDRP-H795D830-X4F0-XX-UDD-SVL-S

Issue Date: 8/7/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1060952  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-77)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/7/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S124RDRP-H795D830-X4F0-XX-UDD-SVL-S  
Description: DEFINE 4 SILVER REGRESSED DIRECT RECESSED HOUSING WITH SILVER STRAIGHT BLADE  
LOUVER WITH DIFFUSER  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 3000K CCT, 80 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 949.2 lumens  
Efficiency: N/A  
Efficacy: 40.4 lumens/watt  
Spacing Criteria (0/90/45): 0.83 / 1.12 / 1.01  
Luminous Opening: Rectangular (W 0.31' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 23.5  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1060952

CATALOG NUMBER: S124RDRP-H795D830-X4F0-XX-UDD-SVL-S

### Luminous Intensity Polar Plot

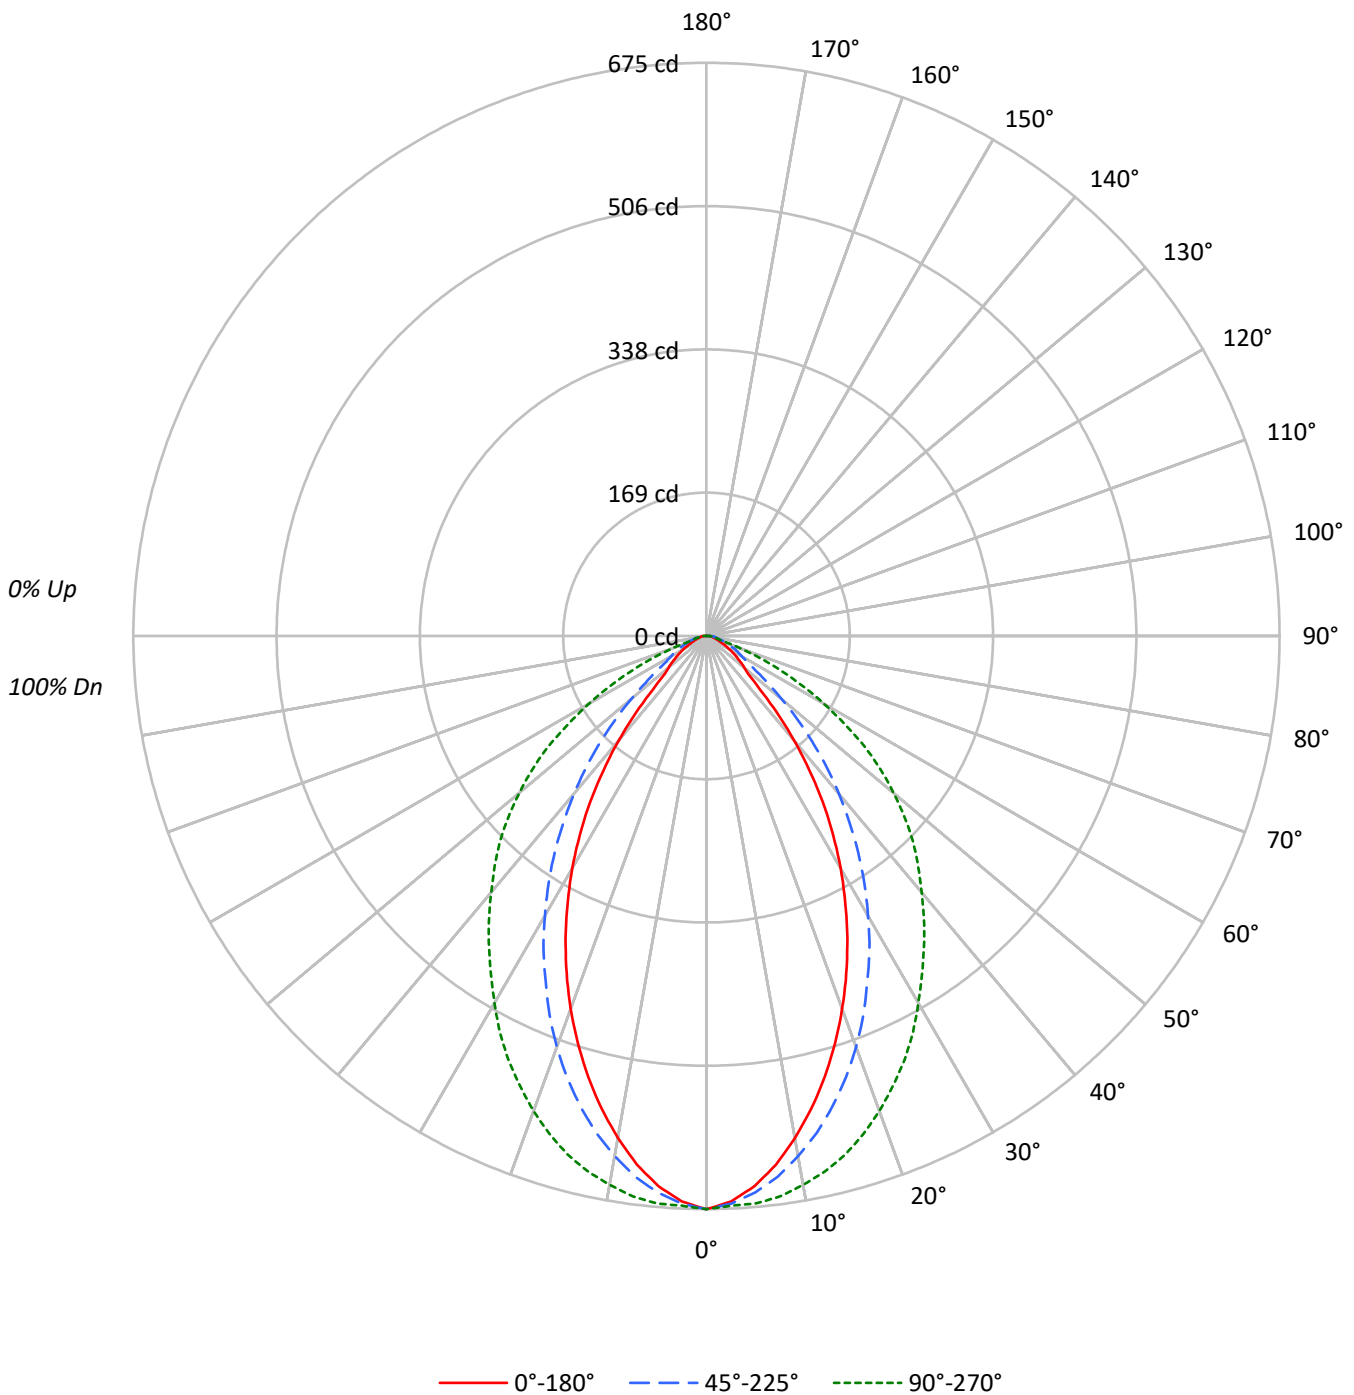



TEST NUMBER: P1060952

CATALOG NUMBER: S124RDRP-H795D830-X4F0-XX-UDD-SVL-S

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	108	105	102	109	106	103	100	101	99	97	98	96	94	94	93	91	89
2	104	97	92	88	101	96	91	87	92	88	85	89	86	83	86	83	81	79
3	97	88	82	77	94	87	81	76	84	79	75	81	77	73	79	75	72	70
4	90	80	73	68	88	79	72	67	77	71	67	75	70	66	73	68	65	63
5	84	73	66	61	82	72	65	60	70	64	60	69	63	59	67	62	59	57
6	79	68	60	55	77	67	60	54	65	59	54	63	58	54	62	57	53	51
7	74	62	55	50	72	62	54	49	60	54	49	59	53	49	58	52	49	47
8	69	58	50	45	68	57	50	45	56	50	45	55	49	45	54	48	45	43
9	65	54	47	42	64	53	46	42	52	46	41	51	45	41	50	45	41	39
10	62	50	43	39	61	50	43	38	49	43	38	48	42	38	47	42	38	36

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	5813	5813	5813
5°	5620	5687	5798
10°	5249	5437	5738
15°	4794	5114	5635
20°	4281	4722	5454
25°	3729	4259	5239
30°	3143	3783	4962
35°	2510	3278	4695
40°	1805	2723	4431
45°	1087	2145	4194
50°	782	1553	3854
55°	658	1045	3417
60°	532	828	2750
65°	420	752	1978
70°	368	627	1060
75°	343	572	516
80°	342	595	466
85°	514	850	593

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 4194 cd/sqm



TEST NUMBER: P1060952

CATALOG NUMBER: S124RDRP-H795D830-X4F0-XX-UDD-SVL-S

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	62.0	6.5
10°-20°	162.4	17.1
20°-30°	210.7	22.2
30°-40°	202.5	21.3
40°-50°	150.3	15.8
50°-60°	92.0	9.7
60°-70°	44.7	4.7
70°-80°	17.0	1.8
80°-90°	7.6	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	435.0	45.8
0°-40°	637.6	67.2
0°-60°	879.9	92.7
0°-90°	949.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	949.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	675	675	675	675	675	
5°	650	660	658	664	671	60
15°	538	553	574	608	632	150
25°	392	412	448	506	551	179
35°	239	260	312	386	447	148
45°	89	112	176	269	344	74
55°	44	46	70	157	228	39
65°	21	22	37	58	97	21
75°	10	16	17	16	16	11
85°	5	9	9	8	6	5
90°	0	0	0	0	0	



TEST NUMBER: P1060952

CATALOG NUMBER: S124RDRP-H795D830-X4F0-XX-UDD-SVL-S

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	675.1	675.1	675.1	675.1	675.1
2.5°	666.5	674.2	669.1	670.8	671.6
5°	650.2	659.6	657.9	663.9	670.8
7.5°	627.8	639.0	642.4	654.5	665.6
10°	600.3	614.1	621.8	641.6	656.2
12.5°	570.3	584.9	599.5	626.1	645.9
15°	537.7	553.1	573.7	608.1	632.1
17.5°	503.3	520.5	545.4	586.6	614.9
20°	467.2	485.3	515.3	560.8	595.2
22.5°	430.3	449.2	482.7	533.4	573.7
25°	392.5	412.3	448.3	505.9	551.4
27.5°	353.9	374.5	415.7	476.7	526.5
30°	316.1	335.8	380.5	446.6	499.0
32.5°	277.4	298.0	346.1	415.7	472.4
35°	238.8	260.2	311.8	385.6	446.6
37.5°	199.3	222.4	276.6	356.4	420.8
40°	160.6	182.9	242.2	326.4	394.2
42.5°	122.8	146.9	209.6	296.3	369.3
45°	89.3	111.7	176.1	268.8	344.4
47.5°	67.0	80.7	145.1	243.1	316.9
50°	58.4	61.0	115.9	214.7	287.7
52.5°	50.7	52.4	90.2	183.8	258.5
55°	43.8	45.5	69.6	157.2	227.6
57.5°	36.9	38.6	55.8	131.4	192.4
60°	30.9	32.6	48.1	104.8	159.7
62.5°	25.8	26.6	42.9	79.9	128.0
65°	20.6	22.3	36.9	58.4	97.1
67.5°	17.2	18.9	30.1	40.4	67.9
70°	14.6	18.9	24.9	28.3	42.1
72.5°	12.0	17.2	20.6	19.8	19.8
75°	10.3	16.3	17.2	15.5	15.5
77.5°	8.6	14.6	13.7	12.9	12.0
80°	6.9	12.0	12.0	10.3	9.4
82.5°	6.0	9.4	9.4	9.4	7.7
85°	5.2	8.6	8.6	7.7	6.0
87.5°	3.4	6.9	7.7	6.9	4.3
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1060952  
 CATALOG NUMBER: S124RDRP-H795D830-X4F0-XX-UDD-SVL-S

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.92	7.26	6.29	7.57	7.89	15.03	16.37	15.39	16.68	16.99
	3H	6.97	8.16	7.35	8.49	8.85	15.53	16.72	15.91	17.05	17.41
	4H	7.48	8.59	7.89	8.94	9.32	15.54	16.65	15.95	17.00	17.38
	6H	7.94	8.95	8.35	9.32	9.72	15.54	16.56	15.96	16.93	17.32
	8H	8.13	9.09	8.56	9.48	9.88	15.54	16.50	15.97	16.89	17.30
	12H	8.34	9.26	8.77	9.65	10.08	15.54	16.46	15.97	16.84	17.27
4H	2H	7.02	8.12	7.42	8.47	8.86	14.92	16.02	15.32	16.37	16.76
	3H	8.29	9.20	8.70	9.60	10.00	15.50	16.40	15.91	16.80	17.21
	4H	8.99	9.80	9.43	10.22	10.67	15.54	16.35	15.98	16.77	17.21
	6H	9.63	10.33	10.09	10.77	11.24	15.60	16.29	16.06	16.74	17.21
	8H	9.87	10.52	10.34	10.97	11.44	15.61	16.26	16.08	16.71	17.18
	12H	10.15	10.73	10.63	11.21	11.68	15.64	16.22	16.13	16.70	17.18
8H	4H	9.42	10.07	9.89	10.52	10.99	15.49	16.15	15.96	16.59	17.06
	6H	10.30	10.83	10.80	11.33	11.81	15.59	16.12	16.09	16.62	17.10
	8H	10.70	11.18	11.22	11.70	12.19	15.64	16.13	16.17	16.64	17.13
	12H	11.18	11.61	11.70	12.10	12.67	15.74	16.17	16.26	16.66	17.23
12H	4H	9.46	10.04	9.95	10.52	11.00	15.46	16.04	15.95	16.52	17.00
	6H	10.41	10.89	10.93	11.41	11.90	15.56	16.04	16.08	16.56	17.05
	8H	10.92	11.35	11.44	11.84	12.42	15.67	16.09	16.18	16.59	17.16