

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1060888

Luminaire Tested: S124RDRP-H575D840-X4F0-XX-UDD-SVL-B

Issue Date: 8/7/2025

Test Information

Test Method: LM-79-2024
Report Number: P1060888
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2406-143-38)
Test Lab: INNOVATION CENTER
Issue Date: 8/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S124RDRP-H575D840-X4F0-XX-UDD-SVL-B
Description: DEFINE 4 BLACK REGRESSED DIRECT RECESSED HOUSING WITH SILVER STRAIGHT BLADE
LOUVER WITH DIFFUSER
HIGH PERFORMANCE LIGHT ENGINE
Light Source: 4000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 687.2 lumens
Efficiency: N/A
Efficacy: 39.5 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 0.87 / 1.02
Luminous Opening: Rectangular (W 0.31' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 17.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1060888

CATALOG NUMBER: S124RDRP-H575D840-X4F0-XX-UDD-SVL-B

Luminous Intensity Polar Plot

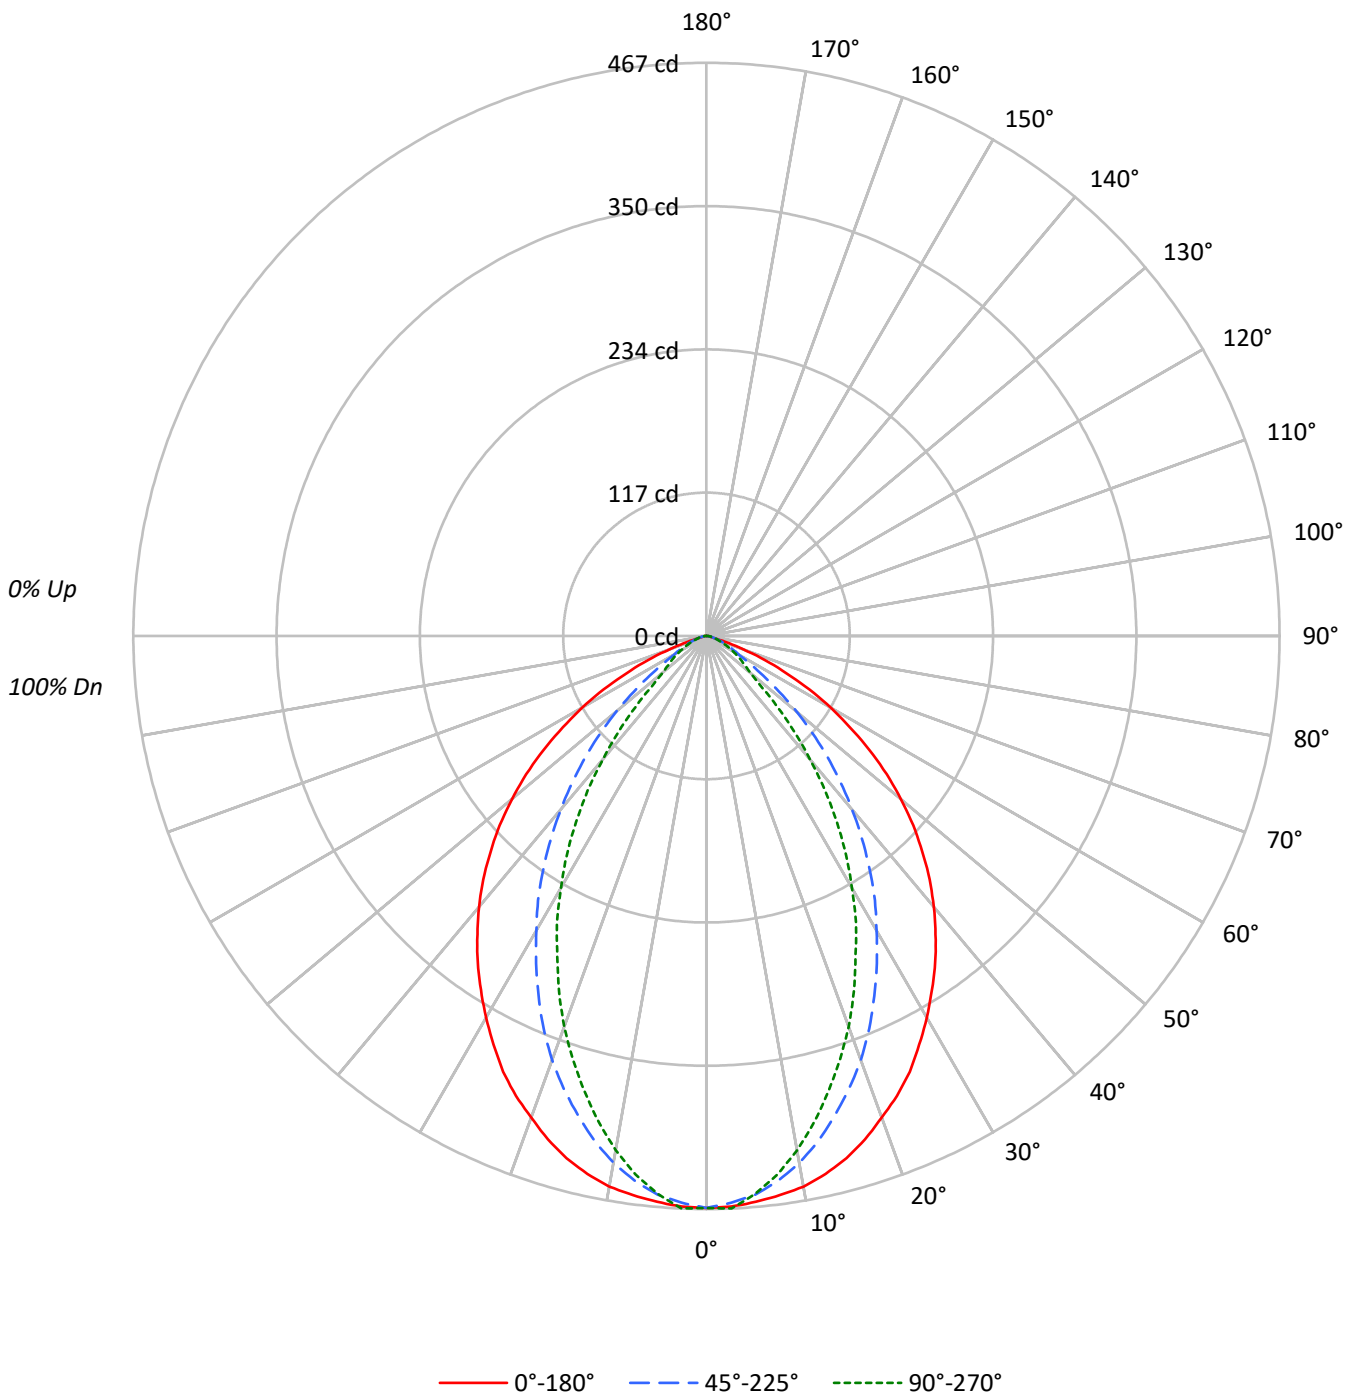



TEST NUMBER: P1060888

CATALOG NUMBER: S124RDRP-H575D840-X4F0-XX-UDD-SVL-B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	97	98	96	94	95	93	92	90
2	104	98	93	88	102	96	91	87	93	89	85	90	86	83	87	84	82	80
3	97	89	82	77	95	87	81	76	84	79	75	82	78	74	79	76	73	71
4	90	81	74	68	88	79	73	68	77	71	67	75	70	66	73	69	65	63
5	84	74	66	61	82	73	66	60	71	65	60	69	63	59	67	62	59	57
6	79	68	60	55	77	67	60	54	65	59	54	63	58	54	62	57	53	51
7	74	62	55	50	72	62	54	49	60	54	49	59	53	49	58	52	48	47
8	69	58	50	45	68	57	50	45	56	49	45	55	49	45	54	48	44	43
9	65	53	46	41	64	53	46	41	52	46	41	51	45	41	50	45	41	39
10	62	50	43	38	60	49	43	38	48	42	38	48	42	38	47	42	38	36

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4014	4014	4014
5°	4000	3949	3944
10°	3984	3811	3720
15°	3927	3605	3423
20°	3826	3369	3104
25°	3724	3075	2732
30°	3571	2754	2357
35°	3416	2436	1946
40°	3240	2074	1476
45°	3030	1695	991
50°	2770	1283	616
55°	2435	848	522
60°	2013	520	429
65°	1459	401	348
70°	793	297	264
75°	176	220	240
80°	129	164	193
85°	128	128	198

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 3030 cd/sqm



TEST NUMBER: P1060888

CATALOG NUMBER: S124RDRP-H575D840-X4F0-XX-UDD-SVL-B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	43.2	6.3
10°-20°	114.7	16.7
20°-30°	151.9	22.1
30°-40°	150.8	21.9
40°-50°	116.1	16.9
50°-60°	69.2	10.1
60°-70°	31.5	4.6
70°-80°	8.1	1.2
80°-90°	1.8	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	309.8	45.1
0°-40°	460.6	67.0
0°-60°	645.8	94.0
0°-90°	687.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	687.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	466	466	466	466	466	
5°	463	464	457	457	456	44
15°	440	429	404	391	384	124
25°	392	364	324	297	288	180
35°	325	284	232	196	185	203
45°	249	200	139	97	81	192
55°	162	116	56	35	35	144
65°	72	43	20	17	17	72
75°	5	7	7	7	7	11
85°	1	1	1	2	2	1
90°	0	0	0	0	0	



TEST NUMBER: P1060888

CATALOG NUMBER: S124RDRP-H575D840-X4F0-XX-UDD-SVL-B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	466.1	466.1	466.1	466.1	466.1
2.5°	465.4	466.1	462.2	465.4	466.8
5°	462.8	463.5	456.9	456.9	456.3
7.5°	459.5	458.2	447.7	443.8	442.5
10°	455.6	451.0	435.9	428.0	425.4
12.5°	449.0	441.8	421.5	410.3	405.7
15°	440.5	429.3	404.4	390.6	384.0
17.5°	430.0	416.2	386.7	368.9	361.7
20°	417.5	399.1	367.6	345.3	338.7
22.5°	405.7	382.7	346.6	321.0	313.8
25°	391.9	363.7	323.6	296.7	287.5
27.5°	375.5	345.3	300.7	273.1	263.9
30°	359.1	325.6	277.0	248.1	237.0
32.5°	342.0	305.3	255.4	222.5	212.0
35°	325.0	284.3	231.7	196.3	185.1
37.5°	306.6	263.2	208.1	171.3	158.9
40°	288.2	242.9	184.5	147.1	131.3
42.5°	269.2	221.9	161.5	122.1	106.3
45°	248.8	200.2	139.2	97.2	81.4
47.5°	228.5	179.9	116.9	72.9	58.4
50°	206.8	158.2	95.8	53.2	46.0
52.5°	185.1	137.2	74.8	41.4	39.4
55°	162.2	115.5	56.5	35.4	34.8
57.5°	138.5	95.8	40.7	30.9	29.5
60°	116.9	77.5	30.2	26.3	24.9
62.5°	94.5	58.4	24.9	21.7	20.4
65°	71.6	42.7	19.7	17.1	17.1
67.5°	51.9	28.9	15.8	13.8	13.1
70°	31.5	17.7	11.8	11.2	10.5
72.5°	15.8	10.5	9.2	8.5	8.5
75°	5.3	6.6	6.6	7.2	7.2
77.5°	3.9	4.6	4.6	5.3	5.3
80°	2.6	3.3	3.3	3.9	3.9
82.5°	2.0	2.0	2.6	2.6	3.3
85°	1.3	1.3	1.3	2.0	2.0
87.5°	0.7	0.7	0.7	1.3	1.3
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1060888
 CATALOG NUMBER: S124RDRP-H575D840-X4F0-XX-UDD-SVL-B

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.94	15.28	14.31	15.59	15.91	5.50	6.84	5.87	7.15	7.47
	3H	14.45	15.63	14.83	15.96	16.33	6.32	7.50	6.70	7.83	8.19
	4H	14.42	15.52	14.82	15.87	16.25	6.60	7.70	7.00	8.05	8.43
	6H	14.36	15.36	14.77	15.73	16.13	6.77	7.78	7.19	8.15	8.54
	8H	14.32	15.27	14.75	15.66	16.07	6.84	7.79	7.27	8.18	8.59
	12H	14.28	15.19	14.71	15.57	16.00	6.88	7.79	7.31	8.18	8.61
4H	2H	13.79	14.89	14.19	15.24	15.62	5.94	7.04	6.35	7.39	7.78
	3H	14.34	15.24	14.75	15.64	16.04	6.91	7.80	7.32	8.20	8.61
	4H	14.31	15.11	14.75	15.53	15.97	7.27	8.06	7.70	8.48	8.93
	6H	14.26	14.94	14.72	15.39	15.86	7.52	8.21	7.98	8.65	9.12
	8H	14.21	14.85	14.68	15.30	15.77	7.61	8.25	8.08	8.69	9.17
	12H	14.17	14.74	14.66	15.22	15.70	7.69	8.25	8.17	8.73	9.21
8H	4H	14.20	14.84	14.67	15.29	15.76	7.36	8.00	7.83	8.44	8.91
	6H	14.14	14.66	14.64	15.16	15.64	7.67	8.19	8.17	8.69	9.17
	8H	14.09	14.56	14.61	15.08	15.57	7.80	8.27	8.32	8.78	9.27
	12H	14.06	14.47	14.58	14.97	15.54	7.94	8.35	8.45	8.85	9.42
12H	4H	14.16	14.72	14.64	15.21	15.68	7.33	7.90	7.82	8.38	8.85
	6H	14.08	14.55	14.61	15.07	15.56	7.65	8.12	8.17	8.63	9.12
	8H	14.06	14.47	14.57	14.97	15.54	7.82	8.23	8.33	8.72	9.30