

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1060851

Luminaire Tested: S124RDRP-H350D940-X4F0-XX-UDD-BVL-W

Issue Date: 8/7/2025

Test Information

Test Method: LM-79-2024
Report Number: P1060851
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-75)
Test Lab: INNOVATION CENTER
Issue Date: 8/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S124RDRP-H350D940-X4F0-XX-UDD-BVL-W
Description: DEFINE 4 WHITE REGRESSED DIRECT RECESSED HOUSING WITH BLACK STRAIGHT BLADE LOUVER WITH DIFFUSER
HIGH PERFORMANCE LIGHT ENGINE
Light Source: 4000K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 391.4 lumens
Efficiency: N/A
Efficacy: 33.5 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 1.11 / 0.97
Luminous Opening: Rectangular (W 0.31' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 11.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1060851

CATALOG NUMBER: S124RDRP-H350D940-X4F0-XX-UDD-BVL-W

Luminous Intensity Polar Plot

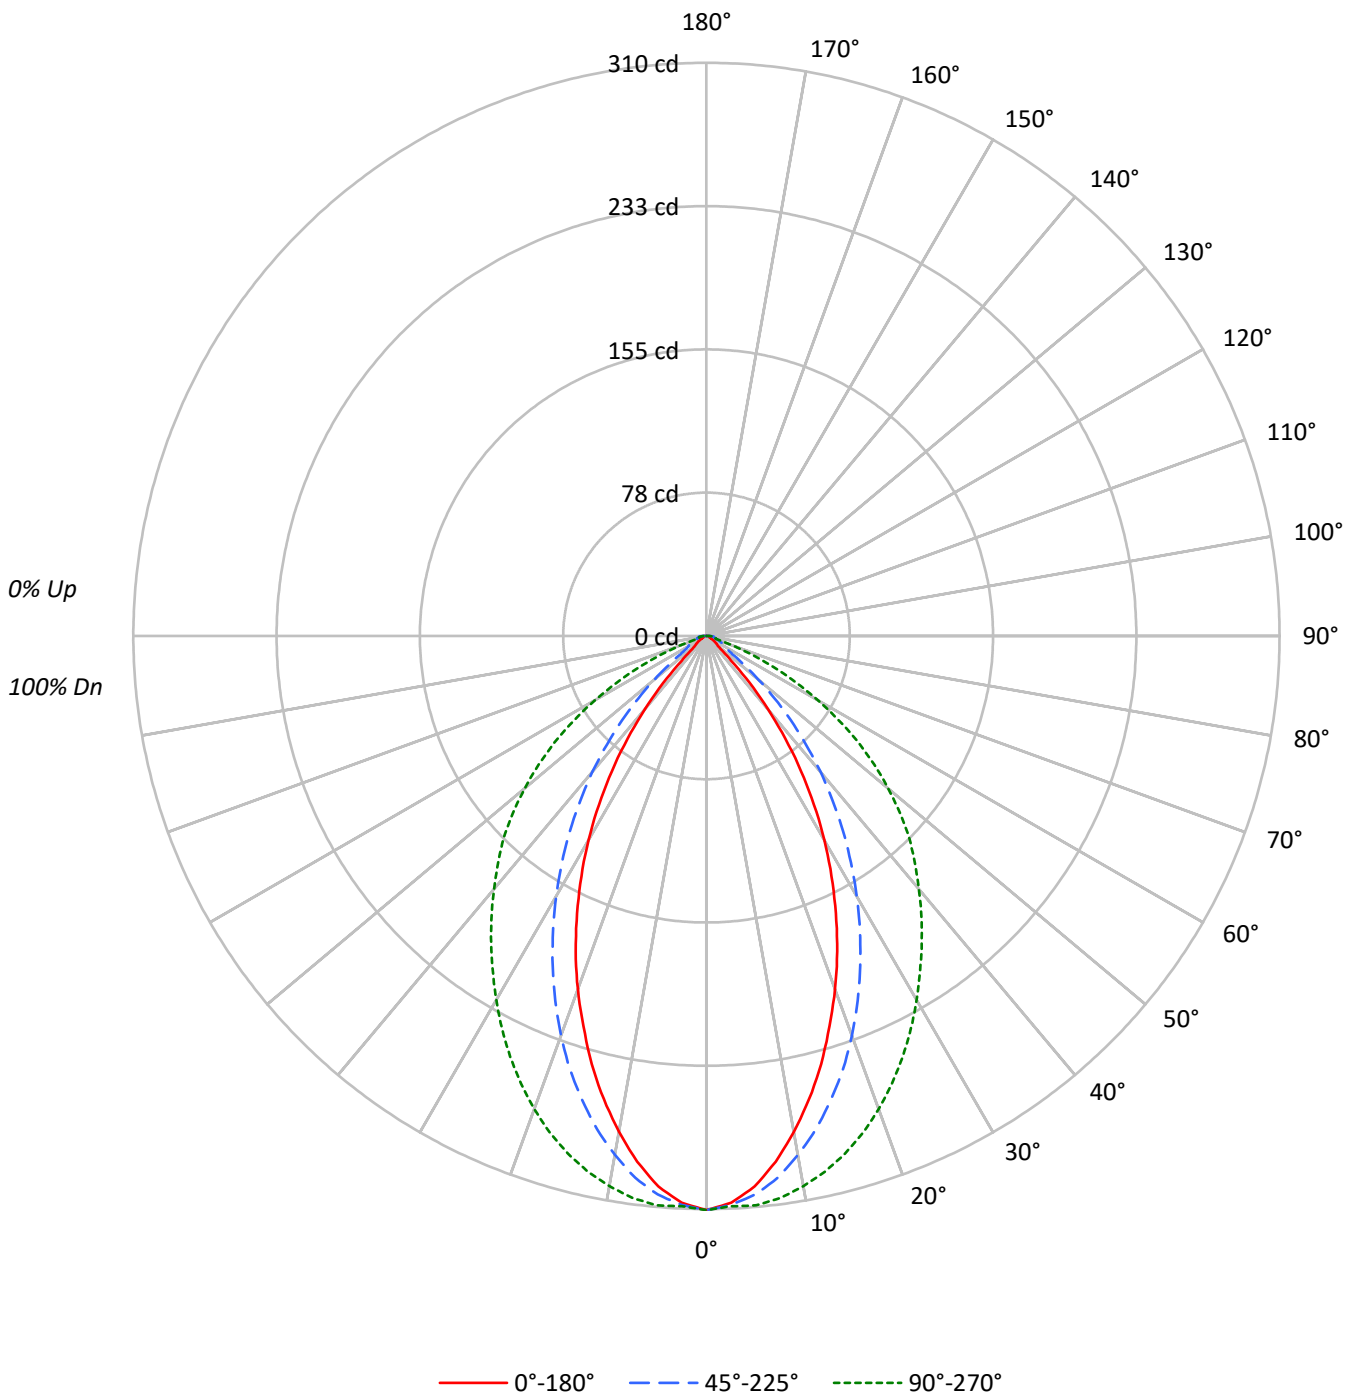



TEST NUMBER: P1060851

CATALOG NUMBER: S124RDRP-H350D940-X4F0-XX-UDD-BVL-W

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	98	98	96	95	95	93	92	90
2	105	98	93	89	102	97	92	88	93	89	86	90	87	84	87	85	82	81
3	98	90	84	79	96	88	83	78	86	81	77	83	79	75	81	77	74	72
4	91	82	75	70	89	81	75	70	79	73	69	76	72	68	74	70	67	65
5	86	75	68	63	84	74	68	63	72	67	62	71	66	62	69	65	61	59
6	80	70	62	57	79	69	62	57	67	61	56	66	60	56	64	59	56	54
7	75	64	57	52	74	64	57	52	62	56	52	61	55	51	60	55	51	49
8	71	60	53	48	70	59	52	48	58	52	48	57	51	47	56	51	47	45
9	67	56	49	44	66	55	49	44	54	48	44	53	48	44	52	47	44	42
10	63	52	45	41	62	52	45	41	51	45	41	50	44	41	49	44	40	39

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2674	2674	2674
5°	2584	2621	2672
10°	2381	2492	2642
15°	2138	2317	2584
20°	1864	2108	2495
25°	1572	1870	2386
30°	1269	1617	2261
35°	939	1353	2134
40°	582	1078	2008
45°	231	785	1891
50°	103	493	1719
55°	83	257	1504
60°	57	195	1199
65°	37	194	825
70°	38	174	385
75°	50	170	170
80°	74	198	198
85°	148	395	287

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 1891 cd/sqm



TEST NUMBER: P1060851

CATALOG NUMBER: S124RDRP-H350D940-X4F0-XX-UDD-BVL-W

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	28.5	7.3
10°-20°	73.5	18.8
20°-30°	92.8	23.7
30°-40°	85.1	21.8
40°-50°	58.0	14.8
50°-60°	31.6	8.1
60°-70°	13.7	3.5
70°-80°	5.0	1.3
80°-90°	3.2	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	194.8	49.8
0°-40°	280.0	71.5
0°-60°	369.5	94.4
0°-90°	391.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	391.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	310	310	310	310	310	
5°	299	303	303	306	309	28
15°	240	248	260	278	290	67
25°	166	177	197	228	251	76
35°	89	102	129	170	203	55
45°	19	32	64	114	155	18
55°	6	6	17	63	100	5
65°	2	3	10	20	40	2
75°	2	5	5	5	5	2
85°	2	3	4	4	3	1
90°	0	0	0	0	0	



TEST NUMBER: P1060851

CATALOG NUMBER: S124RDRP-H350D940-X4F0-XX-UDD-BVL-W

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	310.5	310.5	310.5	310.5	310.5
2.5°	306.9	310.5	308.0	308.7	308.7
5°	298.9	302.9	303.2	306.5	309.1
7.5°	286.8	292.7	295.6	302.2	306.5
10°	272.3	279.2	285.0	296.3	302.2
12.5°	256.6	264.6	273.4	288.3	296.7
15°	239.8	248.2	259.9	278.5	289.8
17.5°	221.2	231.4	245.7	267.9	281.7
20°	203.4	213.6	230.0	255.1	272.3
22.5°	184.8	195.4	213.6	241.6	262.1
25°	165.5	177.1	196.8	228.2	251.1
27.5°	146.5	158.9	179.7	213.9	239.5
30°	127.6	140.0	162.6	199.4	227.4
32.5°	108.2	121.0	145.4	184.1	215.0
35°	89.3	102.4	128.7	169.5	203.0
37.5°	70.0	83.8	111.9	155.3	191.0
40°	51.8	65.6	95.9	141.1	178.6
42.5°	34.6	48.5	79.5	127.2	166.9
45°	19.0	31.7	64.5	114.4	155.3
47.5°	10.2	17.5	49.9	102.1	142.1
50°	7.7	9.5	36.8	88.9	128.3
52.5°	6.6	7.3	25.5	75.1	114.4
55°	5.5	5.8	17.1	63.1	100.2
57.5°	4.4	4.7	12.8	51.0	84.9
60°	3.3	4.0	11.3	39.4	69.6
62.5°	2.6	3.3	10.6	28.8	55.0
65°	1.8	2.6	9.5	19.7	40.5
67.5°	1.8	2.9	8.0	12.8	27.3
70°	1.5	4.0	6.9	8.4	15.3
72.5°	1.5	4.4	5.8	5.8	5.8
75°	1.5	4.7	5.1	5.1	5.1
77.5°	1.5	4.4	4.7	4.4	4.4
80°	1.5	4.0	4.0	4.0	4.0
82.5°	1.5	3.6	4.0	4.0	3.3
85°	1.5	3.3	4.0	4.0	2.9
87.5°	1.1	3.3	3.6	3.6	2.2
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1060851
 CATALOG NUMBER: S124RDRP-H350D940-X4F0-XX-UDD-BVL-W

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.00	0.00	0.00	0.00	11.82	13.10	12.19	13.41	13.73
	3H	0.00	0.00	0.00	0.00	0.00	12.20	13.33	12.58	13.66	14.03
	4H	0.00	0.00	0.00	0.00	0.00	12.18	13.23	12.58	13.58	13.97
	6H	0.00	0.00	0.00	0.00	0.05	12.17	13.13	12.58	13.50	13.90
	8H	0.00	0.00	0.00	0.22	0.63	12.17	13.08	12.60	13.47	13.88
	12H	0.00	0.48	0.04	0.86	1.29	12.18	13.05	12.61	13.44	13.87
4H	2H	0.00	0.00	0.00	0.00	0.00	11.63	12.69	12.04	13.04	13.42
	3H	0.00	0.51	0.06	0.91	1.32	12.05	12.91	12.47	13.32	13.72
	4H	0.94	1.71	1.38	2.13	2.57	12.05	12.82	12.49	13.24	13.68
	6H	2.09	2.75	2.55	3.20	3.66	12.09	12.76	12.56	13.20	13.67
	8H	2.60	3.22	3.07	3.67	4.14	12.12	12.74	12.59	13.19	13.66
	12H	3.17	3.71	3.65	4.20	4.67	12.19	12.73	12.67	13.21	13.69
8H	4H	2.02	2.64	2.49	3.09	3.56	11.96	12.58	12.43	13.03	13.50
	6H	3.58	4.08	4.08	4.58	5.06	12.04	12.55	12.54	13.04	13.53
	8H	4.38	4.83	4.90	5.35	5.84	12.12	12.58	12.65	13.10	13.59
	12H	5.23	5.63	5.74	6.12	6.70	12.29	12.70	12.81	13.19	13.76
12H	4H	2.21	2.76	2.70	3.24	3.72	11.93	12.47	12.41	12.95	13.43
	6H	3.93	4.38	4.45	4.90	5.39	12.01	12.47	12.54	12.99	13.48
	8H	4.94	5.34	5.45	5.83	6.41	12.15	12.55	12.67	13.05	13.62