

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1056615

Luminaire Tested: S125R3DRP-H850D927-X4F0-XX-UDD-F-W

Issue Date: 7/25/2025

Test Information

Test Method: LM-79-2024
Report Number: P1056615
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2503-402-10)
Test Lab: INNOVATION CENTER
Issue Date: 7/25/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S125R3DRP-H850D927-X4F0-XX-UDD-F-W
Description: DEFINE 5, WHITE 3-INCH REGRESSED DIRECT RECESSED HOUSING WITH FROSTED LENS
HIGH PERFORMANCE LIGHT ENGINE
Light Source: 2700K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2183.6 lumens
Efficiency: N/A
Efficacy: 91.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.01 / 1.17
Luminous Opening: Rectangular (W 0.39' x L: 3.9' x H: 0')
CIE Type: Direct

Input Watts (W): 23.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1056615

CATALOG NUMBER: S125R3DRP-H850D927-X4F0-XX-UDD-F-W

Luminous Intensity Polar Plot

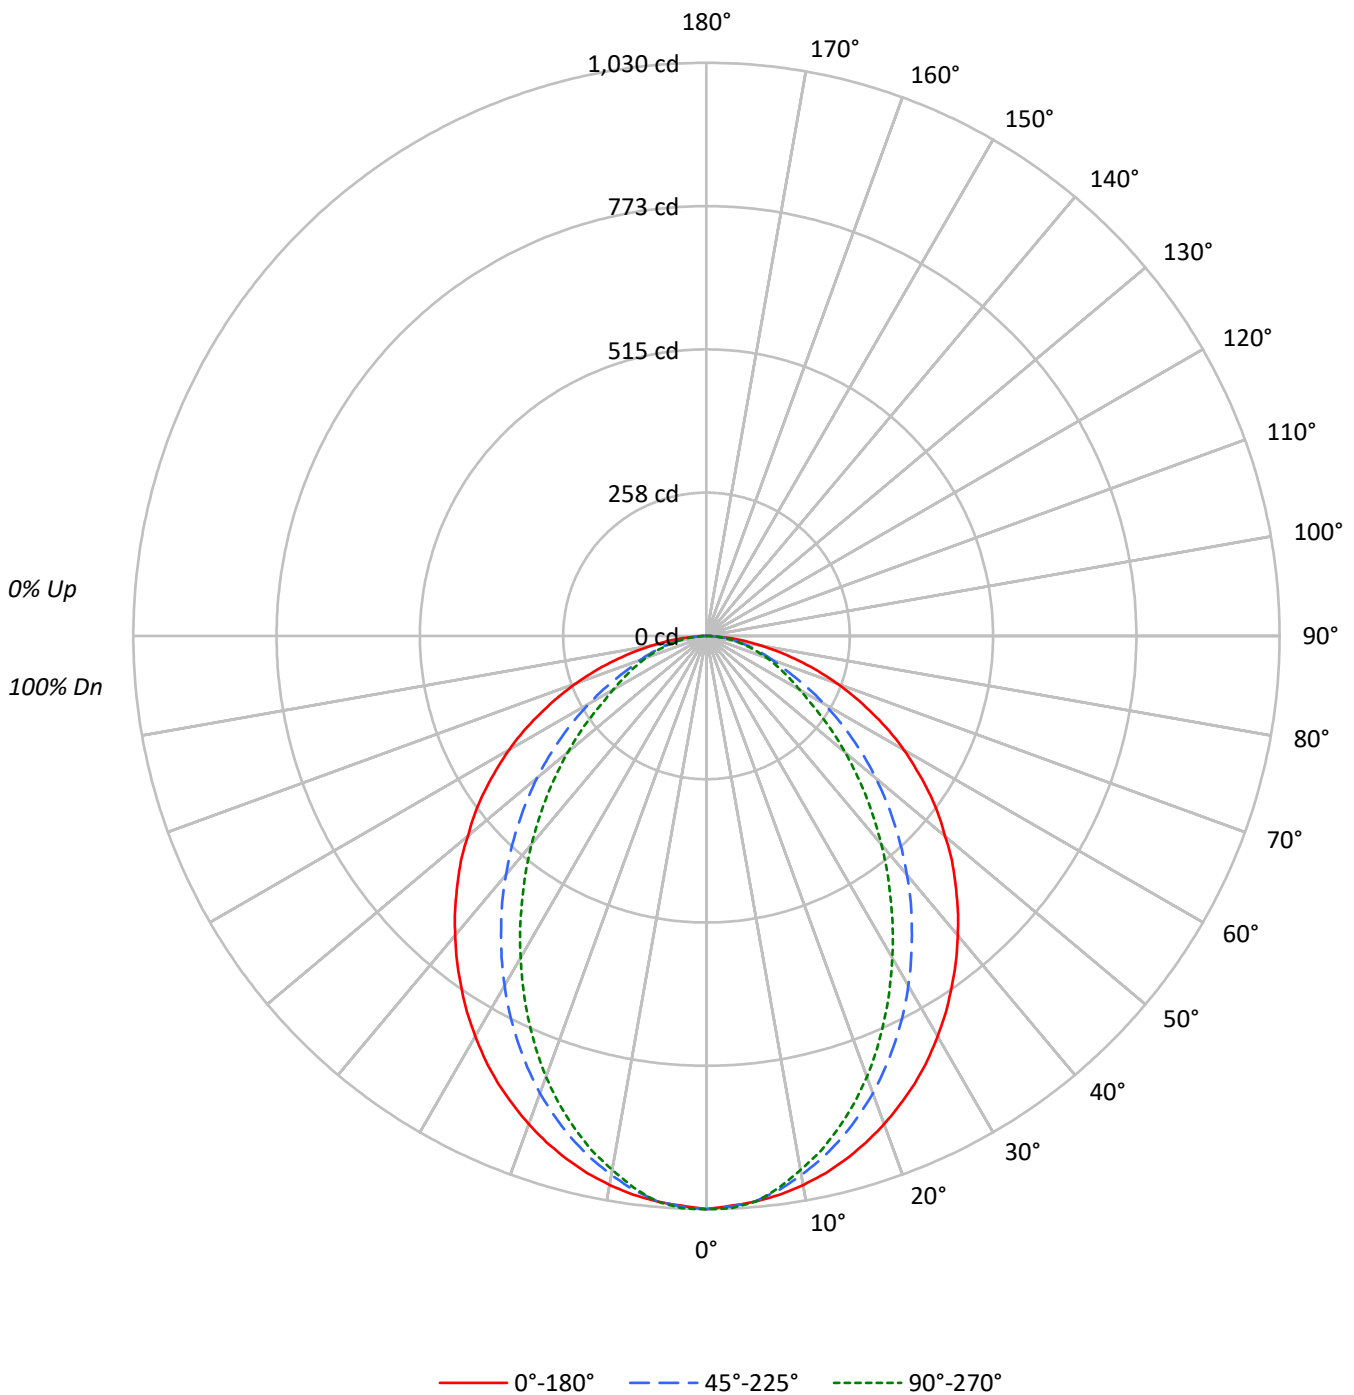



TEST NUMBER: P1056615

CATALOG NUMBER: S125R3DRP-H850D927-X4F0-XX-UDD-F-W

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																												
1	110	105	101	98	107	103	100	96	99	96	93	95	93	90	91	90	88	86																												
2	101	93	87	81	98	91	85	80	88	83	79	84	80	77	81	78	75	73																												
3	92	83	75	69	90	81	74	68	78	72	67	75	70	66	73	69	65	63																												
4	85	74	66	59	83	73	65	59	70	63	58	68	62	57	66	61	57	55																												
5	79	67	58	52	77	66	58	52	63	56	51	62	55	51	60	54	50	48																												
6	73	60	52	46	71	59	51	46	58	51	45	56	50	45	55	49	45	43																												
7	68	55	47	41	66	54	46	41	53	46	41	51	45	40	50	44	40	38																												
8	63	51	42	37	62	50	42	37	49	42	37	47	41	36	46	40	36	34																												
9	59	47	39	33	58	46	39	33	45	38	33	44	38	33	43	37	33	31																												
10	56	43	36	31	55	43	35	30	42	35	30	41	35	30	40	34	30	28																												

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7283	7283	7283
5°	7240	7235	7240
10°	7192	7060	6993
15°	7119	6844	6703
20°	7024	6579	6343
25°	6917	6265	5912
30°	6782	5924	5454
35°	6634	5554	4979
40°	6485	5175	4510
45°	6327	4778	4042
50°	6159	4371	3578
55°	6004	3924	3111
60°	5791	3448	2733
65°	5505	2926	2541
70°	5169	2617	2379
75°	4673	2409	2242
80°	4059	2186	2093
85°	3171	1930	1930

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 6327 cd/sqm



TEST NUMBER: P1056615

CATALOG NUMBER: S125R3DRP-H850D927-X4F0-XX-UDD-F-W

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	96.4	4.4
10°-20°	264.7	12.1
20°-30°	373.9	17.1
30°-40°	411.6	18.8
40°-50°	383.9	17.6
50°-60°	306.5	14.0
60°-70°	206.3	9.4
70°-80°	109.9	5.0
80°-90°	30.5	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	734.9	33.7
0°-40°	1146.5	52.5
0°-60°	1837.0	84.1
0°-90°	2183.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2183.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1030	1030	1030	1030	1030	
5°	1020	1029	1020	1016	1020	97
15°	973	967	935	919	916	274
25°	887	860	803	768	758	408
35°	769	723	644	593	577	481
45°	633	573	478	420	404	489
55°	487	414	318	268	252	435
65°	329	257	175	155	152	326
75°	171	114	88	83	82	182
85°	39	27	24	24	24	47
90°	0	0	0	0	0	



TEST NUMBER: P1056615

CATALOG NUMBER: S125R3DRP-H850D927-X4F0-XX-UDD-F-W

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1030.2	1030.2	1030.2	1030.2	1030.2
2.5°	1024.9	1033.3	1026.4	1027.9	1029.5
5°	1020.3	1028.7	1019.5	1016.4	1020.3
7.5°	1012.6	1019.5	1004.2	997.3	1000.3
10°	1001.9	1006.5	983.5	974.2	974.2
12.5°	988.8	988.8	961.2	948.2	948.2
15°	972.7	967.3	935.1	919.0	915.9
17.5°	954.3	944.3	906.0	885.3	881.4
20°	933.6	917.5	874.5	847.7	843.1
22.5°	910.6	889.9	840.0	807.0	801.6
25°	886.8	859.9	803.2	767.9	757.9
27.5°	859.9	827.7	765.6	725.7	713.4
30°	830.8	794.0	725.7	681.2	668.2
32.5°	800.9	759.5	685.0	637.5	622.9
35°	768.7	723.4	643.6	593.0	576.9
37.5°	736.4	687.3	603.0	550.0	533.2
40°	702.7	649.0	560.8	506.3	488.7
42.5°	668.9	611.4	519.3	464.1	445.7
45°	632.9	573.0	477.9	419.6	404.3
47.5°	598.4	533.9	437.3	380.5	363.6
50°	560.0	493.3	397.4	340.6	325.3
52.5°	524.7	453.4	357.5	304.5	288.4
55°	487.1	413.5	318.4	267.7	252.4
57.5°	448.0	373.6	280.8	233.2	218.6
60°	409.6	333.7	243.9	200.2	193.3
62.5°	370.5	296.1	209.4	175.7	171.1
65°	329.1	257.0	174.9	155.0	151.9
67.5°	290.0	219.4	147.3	135.8	132.7
70°	250.1	181.8	126.6	116.6	115.1
72.5°	211.0	145.8	106.6	99.7	98.2
75°	171.1	113.5	88.2	82.8	82.1
77.5°	134.2	85.2	69.8	67.5	66.0
80°	99.7	63.7	53.7	52.2	51.4
82.5°	68.3	43.7	38.4	38.4	36.8
85°	39.1	26.8	23.8	24.5	23.8
87.5°	14.6	11.5	10.7	11.5	11.5
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1056615
 CATALOG NUMBER: S125R3DRP-H850D927-X4F0-XX-UDD-F-W

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	18.19	19.73	18.55	20.04	20.35	14.57	16.11	14.93	16.42	16.74
	3H	19.97	21.36	20.35	21.68	22.05	16.05	17.43	16.42	17.76	18.12
	4H	20.63	21.92	21.03	22.27	22.65	16.64	17.93	17.03	18.28	18.66
	6H	21.10	22.30	21.51	22.67	23.06	17.10	18.30	17.51	18.67	19.06
	8H	21.26	22.40	21.68	22.79	23.19	17.26	18.40	17.68	18.79	19.19
	12H	21.35	22.45	21.78	22.83	23.26	17.37	18.47	17.80	18.85	19.28
4H	2H	18.32	19.62	18.72	19.97	20.35	15.25	16.54	15.65	16.89	17.27
	3H	20.29	21.37	20.70	21.77	22.17	16.92	18.00	17.33	18.40	18.80
	4H	21.04	22.01	21.47	22.43	22.86	17.63	18.60	18.06	19.01	19.45
	6H	21.63	22.48	22.09	22.92	23.38	18.21	19.06	18.67	19.50	19.96
	8H	21.84	22.63	22.30	23.07	23.54	18.42	19.21	18.88	19.66	20.12
	12H	21.98	22.69	22.47	23.17	23.64	18.58	19.29	19.06	19.77	20.24
8H	4H	21.10	21.89	21.56	22.34	22.80	17.99	18.78	18.45	19.23	19.69
	6H	21.76	22.42	22.26	22.91	23.38	18.69	19.35	19.19	19.84	20.32
	8H	22.01	22.60	22.53	23.11	23.60	18.98	19.57	19.49	20.07	20.56
	12H	22.22	22.74	22.73	23.23	23.80	19.22	19.74	19.73	20.23	20.79
12H	4H	21.09	21.80	21.58	22.28	22.75	18.04	18.75	18.52	19.22	19.70
	6H	21.75	22.34	22.27	22.85	23.34	18.76	19.35	19.28	19.86	20.35
	8H	22.05	22.57	22.56	23.06	23.63	19.11	19.63	19.62	20.12	20.68