

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1056608

Luminaire Tested: S125R3DRP-H850D840-X4F0-XX-UDD-F-S

Issue Date: 7/25/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1056608  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2503-402-12)  
Test Lab: INNOVATION CENTER  
Issue Date: 7/25/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S125R3DRP-H850D840-X4F0-XX-UDD-F-S  
Description: DEFINE 5, SILVER 3-INCH REGRESSED DIRECT RECESSED HOUSING WITH FROSTED LENS  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 4000K CCT, 80 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1908.9 lumens  
Efficiency: N/A  
Efficacy: 80.2 lumens/watt  
Spacing Criteria (0/90/45): 1.19 / 0.95 / 1.11  
Luminous Opening: Rectangular (W 0.39' x L: 3.9' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 23.8  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1056608

CATALOG NUMBER: S125R3DRP-H850D840-X4F0-XX-UDD-F-S

### Luminous Intensity Polar Plot

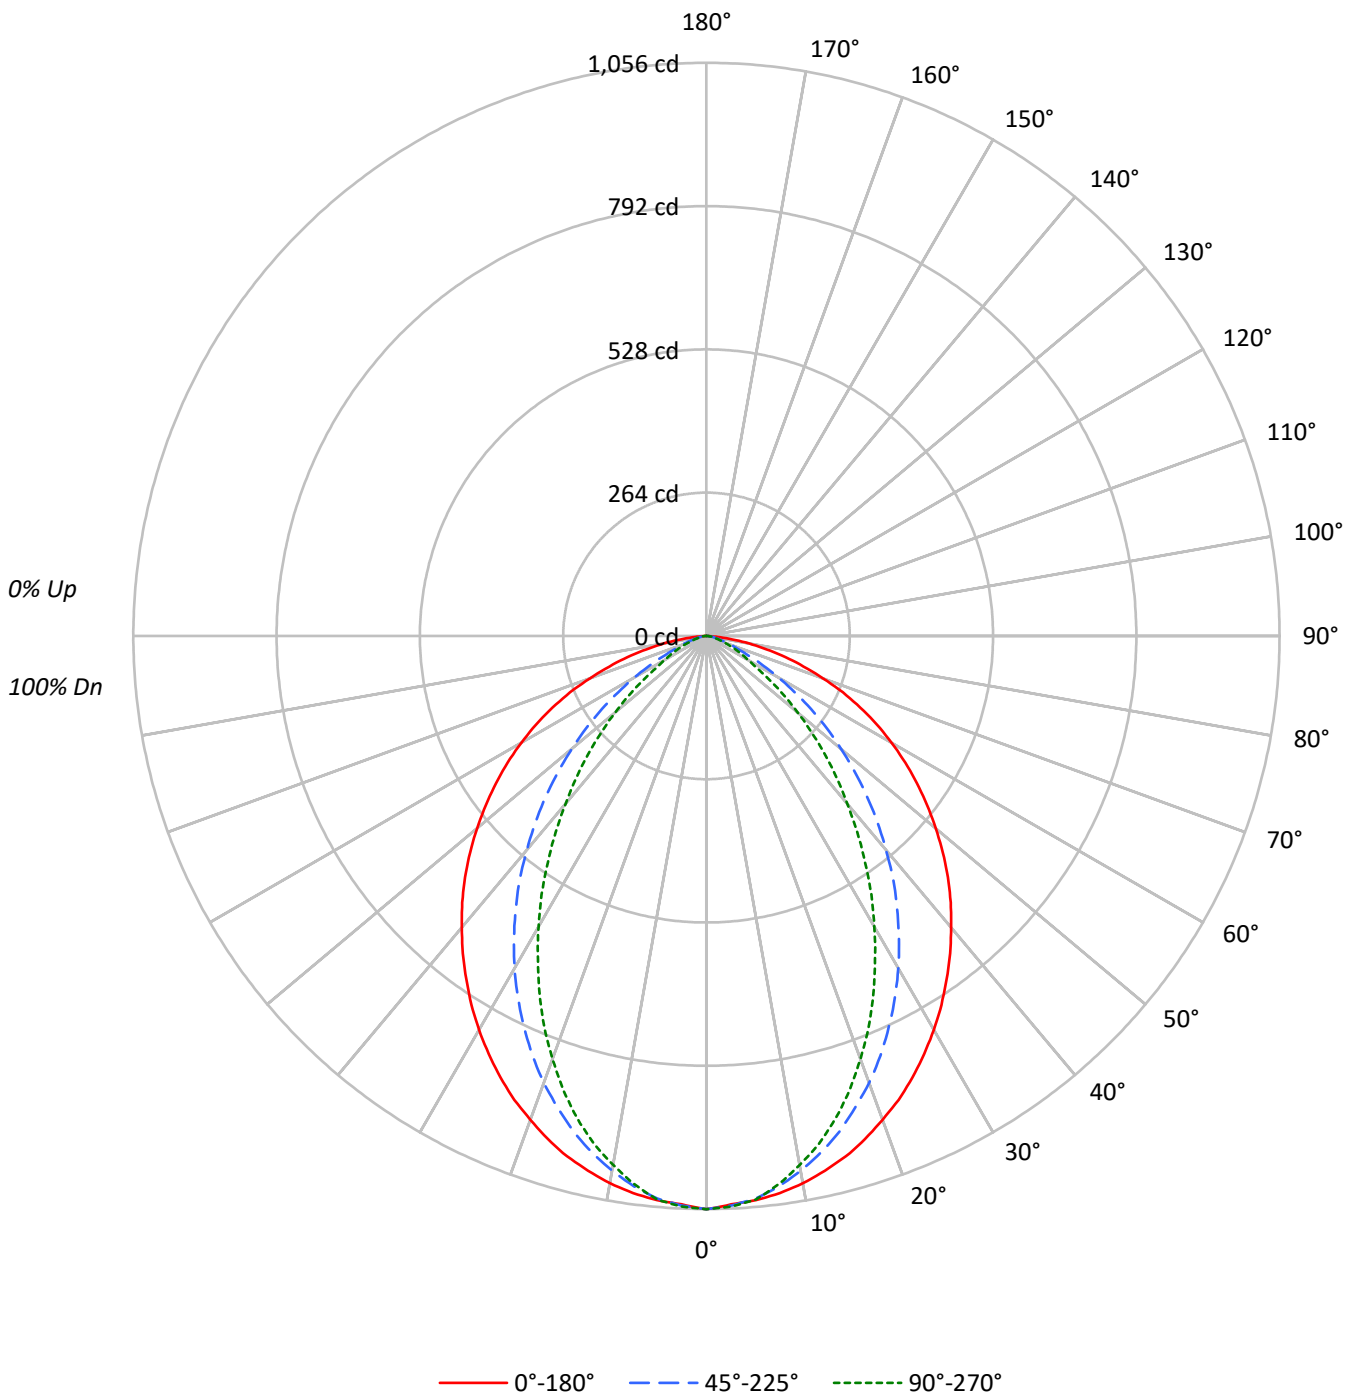



TEST NUMBER: P1056608

CATALOG NUMBER: S125R3DRP-H850D840-X4F0-XX-UDD-F-S

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	107	103	100	108	105	102	99	101	98	96	97	95	93	93	92	90	88
2	102	96	90	85	100	94	89	84	90	86	82	87	84	80	84	81	79	77
3	95	86	79	73	92	84	78	73	81	76	71	79	74	70	76	72	69	67
4	88	77	70	64	86	76	69	63	74	67	62	71	66	62	69	65	61	59
5	81	70	62	56	79	69	61	56	67	60	55	65	59	55	63	58	54	52
6	76	64	56	50	74	63	55	50	61	54	49	60	54	49	58	53	49	47
7	71	58	50	45	69	58	50	45	56	49	44	55	49	44	54	48	44	42
8	66	54	46	41	65	53	46	41	52	45	40	51	45	40	50	44	40	38
9	62	50	42	37	61	49	42	37	48	41	37	47	41	37	46	41	36	35
10	58	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	7467	7467	7467
5°	7404	7384	7398
10°	7350	7181	7104
15°	7265	6921	6735
20°	7136	6592	6239
25°	7002	6202	5675
30°	6841	5771	5053
35°	6659	5283	4397
40°	6471	4747	3718
45°	6286	4185	3079
50°	6065	3560	2420
55°	5833	2893	1760
60°	5572	2158	1258
65°	5234	1424	982
70°	4729	990	686
75°	4113	642	535
80°	3224	476	440
85°	1663	397	316

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 6286 cd/sqm



TEST NUMBER: P1056608

CATALOG NUMBER: S125R3DRP-H850D840-X4F0-XX-UDD-F-S

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	98.4	5.2
10°-20°	267.4	14.0
20°-30°	369.8	19.4
30°-40°	391.8	20.5
40°-50°	342.0	17.9
50°-60°	243.2	12.7
60°-70°	135.3	7.1
70°-80°	52.0	2.7
80°-90°	9.0	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	735.6	38.5
0°-40°	1127.4	59.1
0°-60°	1712.7	89.7
0°-90°	1908.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1908.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1056	1056	1056	1056	1056	
5°	1043	1051	1040	1038	1042	99
15°	993	984	946	925	920	280
25°	898	867	795	746	728	413
35°	772	719	612	538	510	483
45°	629	554	419	334	308	485
55°	473	379	235	162	143	423
65°	313	205	85	63	59	309
75°	151	59	24	20	20	160
85°	20	6	5	4	4	30
90°	0	0	0	0	0	



TEST NUMBER: P1056608

CATALOG NUMBER: S125R3DRP-H850D840-X4F0-XX-UDD-F-S

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1056.2	1056.2	1056.2	1056.2	1056.2
2.5°	1048.3	1059.1	1050.3	1051.3	1052.2
5°	1043.4	1051.3	1040.5	1037.6	1042.5
7.5°	1035.6	1041.5	1022.9	1016.1	1019.0
10°	1023.9	1025.8	1000.4	990.6	989.7
12.5°	1009.2	1006.3	975.0	959.3	958.4
15°	992.6	983.8	945.7	925.1	920.2
17.5°	972.1	958.4	911.4	885.0	877.2
20°	948.6	930.0	876.2	842.0	829.3
22.5°	925.1	899.7	837.1	794.1	780.4
25°	897.7	867.4	795.1	746.2	727.6
27.5°	868.4	832.2	752.0	695.3	672.8
30°	838.1	796.0	707.0	643.5	619.0
32.5°	805.8	757.9	660.1	590.7	565.2
35°	771.6	718.8	612.2	537.9	509.5
37.5°	737.4	678.7	565.2	486.0	456.7
40°	701.2	637.6	514.4	433.2	402.9
42.5°	666.0	595.6	466.5	383.3	356.0
45°	628.8	553.5	418.6	334.4	308.0
47.5°	590.7	509.5	370.6	288.5	262.1
50°	551.5	466.5	323.7	243.5	220.0
52.5°	512.4	423.4	279.7	200.5	179.9
55°	473.3	379.4	234.7	162.3	142.8
57.5°	434.2	336.4	192.7	127.1	109.5
60°	394.1	292.4	152.6	93.9	89.0
62.5°	354.0	249.4	118.3	77.3	73.3
65°	312.9	205.4	85.1	62.6	58.7
67.5°	271.9	165.3	61.6	47.9	45.0
70°	228.8	126.2	47.9	36.2	33.2
72.5°	187.8	90.9	34.2	26.4	25.4
75°	150.6	58.7	23.5	19.6	19.6
77.5°	113.4	35.2	16.6	14.7	14.7
80°	79.2	20.5	11.7	10.8	10.8
82.5°	47.9	10.8	7.8	6.8	6.8
85°	20.5	5.9	4.9	3.9	3.9
87.5°	3.9	2.0	2.0	2.0	2.0
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1056608  
 CATALOG NUMBER: S125R3DRP-H850D840-X4F0-XX-UDD-F-S

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	18.15	19.59	18.51	19.90	20.22	10.78	12.23	11.15	12.54	12.86
	3H	19.71	20.99	20.08	21.32	21.68	11.35	12.63	11.72	12.96	13.32
	4H	20.23	21.43	20.63	21.78	22.16	11.47	12.67	11.87	13.02	13.40
	6H	20.56	21.67	20.98	22.04	22.43	11.54	12.64	11.95	13.01	13.40
	8H	20.65	21.70	21.07	22.09	22.49	11.54	12.59	11.97	12.98	13.39
	12H	20.67	21.68	21.10	22.06	22.49	11.53	12.54	11.96	12.92	13.35
4H	2H	18.04	19.24	18.44	19.59	19.97	11.35	12.55	11.75	12.90	13.28
	3H	19.71	20.70	20.12	21.10	21.50	12.02	13.01	12.43	13.41	13.81
	4H	20.26	21.14	20.69	21.56	22.00	12.18	13.06	12.61	13.48	13.92
	6H	20.65	21.42	21.11	21.86	22.32	12.29	13.06	12.75	13.50	13.96
	8H	20.76	21.47	21.22	21.91	22.38	12.30	13.02	12.77	13.46	13.93
	12H	20.80	21.44	21.29	21.92	22.39	12.30	12.94	12.79	13.42	13.89
8H	4H	20.16	20.88	20.63	21.32	21.79	12.45	13.16	12.91	13.61	14.08
	6H	20.55	21.13	21.05	21.63	22.11	12.58	13.17	13.08	13.66	14.14
	8H	20.66	21.18	21.17	21.69	22.18	12.61	13.14	13.13	13.65	14.14
	12H	20.72	21.18	21.23	21.68	22.24	12.63	13.10	13.14	13.59	14.16
12H	4H	20.13	20.76	20.61	21.24	21.71	12.46	13.10	12.95	13.58	14.05
	6H	20.50	21.02	21.01	21.53	22.02	12.59	13.12	13.11	13.63	14.12
	8H	20.62	21.09	21.14	21.58	22.15	12.65	13.12	13.16	13.61	14.18