

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1056381

Luminaire Tested: S125R3DRP-S1090D940-X4F0-XX-UDD-F-W

Issue Date: 7/25/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1056381  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2503-402-10)  
Test Lab: INNOVATION CENTER  
Issue Date: 7/25/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S125R3DRP-S1090D940-X4F0-XX-UDD-F-W  
Description: DEFINE 5, WHITE 3-INCH REGRESSED DIRECT RECESSED HOUSING WITH FROSTED LENS  
CORE LIGHT ENGINE  
Light Source: 4000K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3261.8 lumens  
Efficiency: N/A  
Efficacy: 94.0 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.01 / 1.17  
Luminous Opening: Rectangular (W 0.39' x L: 3.9' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 34.7  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1056381

CATALOG NUMBER: S125R3DRP-S1090D940-X4F0-XX-UDD-F-W

### Luminous Intensity Polar Plot

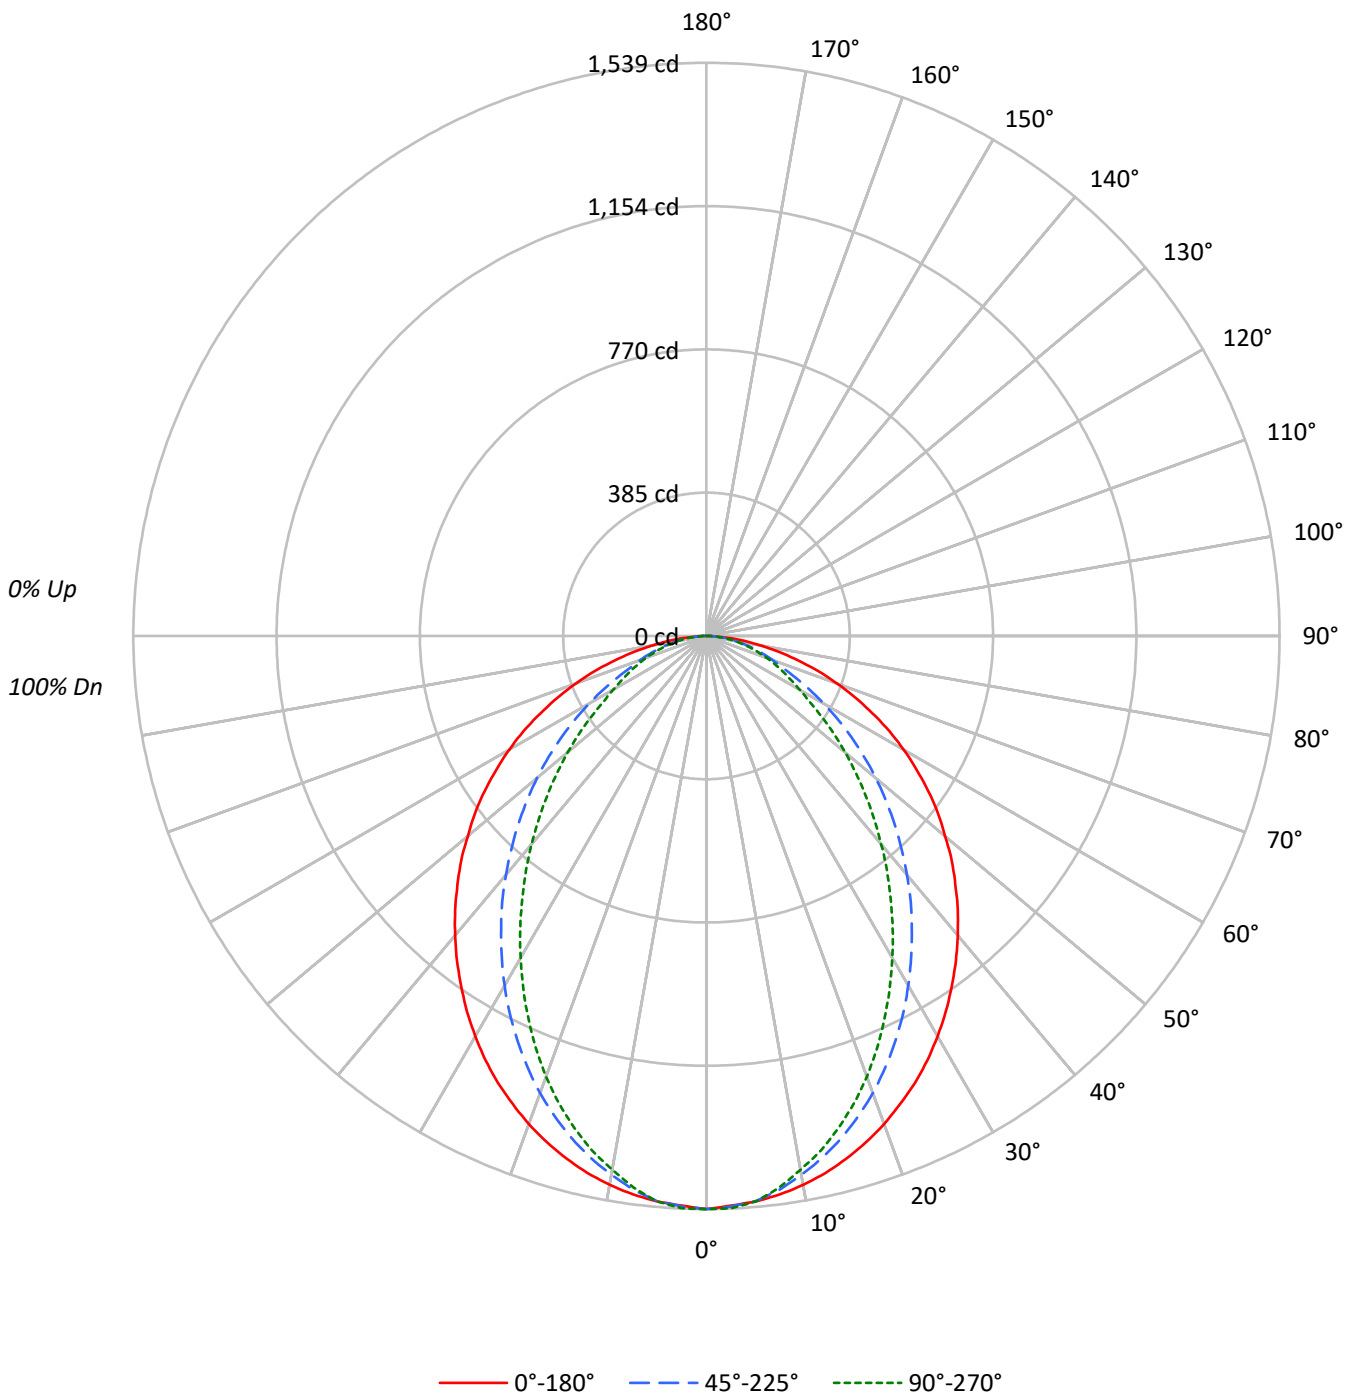



TEST NUMBER: P1056381

CATALOG NUMBER: S125R3DRP-S1090D940-X4F0-XX-UDD-F-W

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	105	101	98	107	103	100	96	99	96	93	95	93	90	91	90	88	86
2	101	93	87	81	98	91	85	80	88	83	79	84	80	77	81	78	75	73
3	92	83	75	69	90	81	74	68	78	72	67	75	70	66	73	69	65	63
4	85	74	66	59	83	73	65	59	70	63	58	68	62	57	66	61	57	55
5	79	67	58	52	77	66	58	52	63	56	51	62	55	51	60	54	50	48
6	73	60	52	46	71	59	51	46	58	51	45	56	50	45	55	49	45	43
7	68	55	47	41	66	54	46	41	53	46	41	51	45	40	50	44	40	38
8	63	51	42	37	62	50	42	37	49	42	37	47	41	36	46	40	36	34
9	59	47	39	33	58	46	39	33	45	38	33	44	38	33	43	37	33	31
10	56	43	36	31	55	43	35	30	42	35	30	41	35	30	40	34	30	28

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	10880	10880	10880
5°	10816	10807	10816
10°	10743	10546	10447
15°	10634	10224	10013
20°	10492	9827	9475
25°	10333	9359	8831
30°	10130	8849	8147
35°	9909	8297	7437
40°	9686	7731	6736
45°	9452	7137	6038
50°	9200	6528	5344
55°	8969	5862	4647
60°	8651	5152	4083
65°	8223	4371	3795
70°	7722	3909	3553
75°	6979	3600	3349
80°	6066	3265	3127
85°	4737	2879	2879

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 9452 cd/sqm



TEST NUMBER: P1056381

CATALOG NUMBER: S125R3DRP-S1090D940-X4F0-XX-UDD-F-W

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	144.0	4.4
10°-20°	395.4	12.1
20°-30°	558.5	17.1
30°-40°	614.8	18.8
40°-50°	573.5	17.6
50°-60°	457.8	14.0
60°-70°	308.1	9.4
70°-80°	164.1	5.0
80°-90°	45.6	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1097.8	33.7
0°-40°	1712.7	52.5
0°-60°	2744.0	84.1
0°-90°	3261.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3261.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1539	1539	1539	1539	1539	
5°	1524	1537	1523	1518	1524	145
15°	1453	1445	1397	1373	1368	410
25°	1325	1285	1200	1147	1132	610
35°	1148	1081	961	886	862	718
45°	945	856	714	627	604	730
55°	728	618	476	400	377	650
65°	492	384	261	232	227	488
75°	256	170	132	124	123	272
85°	58	40	36	37	36	70
90°	0	0	0	0	0	



TEST NUMBER: P1056381

CATALOG NUMBER: S125R3DRP-S1090D940-X4F0-XX-UDD-F-W

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1539.0	1539.0	1539.0	1539.0	1539.0
2.5°	1530.9	1543.5	1533.2	1535.5	1537.8
5°	1524.1	1536.7	1522.9	1518.3	1524.1
7.5°	1512.6	1522.9	1500.0	1489.7	1494.3
10°	1496.6	1503.4	1469.1	1455.3	1455.3
12.5°	1477.1	1477.1	1435.8	1416.3	1416.3
15°	1453.0	1445.0	1396.9	1372.8	1368.2
17.5°	1425.5	1410.6	1353.3	1322.4	1316.6
20°	1394.6	1370.5	1306.3	1266.2	1259.4
22.5°	1360.2	1329.3	1254.8	1205.5	1197.5
25°	1324.7	1284.6	1199.8	1147.1	1132.2
27.5°	1284.6	1236.4	1143.6	1084.0	1065.7
30°	1241.0	1186.0	1084.0	1017.6	998.1
32.5°	1196.3	1134.4	1023.3	952.2	930.5
35°	1148.2	1080.6	961.4	885.8	861.7
37.5°	1100.1	1026.7	900.7	821.6	796.4
40°	1049.6	969.4	837.7	756.3	729.9
42.5°	999.2	913.3	775.8	693.3	665.8
45°	945.4	856.0	713.9	626.8	603.9
47.5°	893.8	797.6	653.2	568.4	543.2
50°	836.5	736.8	593.6	508.8	485.9
52.5°	783.8	677.2	534.0	454.9	430.9
55°	727.7	617.6	475.6	399.9	377.0
57.5°	669.2	558.1	419.4	348.4	326.6
60°	611.9	498.5	364.4	299.1	288.8
62.5°	553.5	442.3	312.8	262.4	255.5
65°	491.6	383.9	261.3	231.5	226.9
67.5°	433.2	327.7	220.0	202.8	198.2
70°	373.6	271.6	189.1	174.2	171.9
72.5°	315.1	217.7	159.3	149.0	146.7
75°	255.5	169.6	131.8	123.8	122.6
77.5°	200.5	127.2	104.3	100.8	98.5
80°	149.0	95.1	80.2	77.9	76.8
82.5°	102.0	65.3	57.3	57.3	55.0
85°	58.4	40.1	35.5	36.7	35.5
87.5°	21.8	17.2	16.0	17.2	17.2
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P1056381

CATALOG NUMBER: S125R3DRP-S1090D940-X4F0-XX-UDD-F-W

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	19.58	21.12	19.95	21.43	21.75	15.96	17.50	16.33	17.82	18.13
	3H	21.37	22.75	21.74	23.08	23.44	17.44	18.82	17.82	19.15	19.51
	4H	22.02	23.32	22.42	23.67	24.05	18.03	19.33	18.43	19.68	20.06
	6H	22.50	23.70	22.91	24.06	24.46	18.49	19.69	18.90	20.06	20.45
	8H	22.65	23.79	23.08	24.18	24.58	18.65	19.80	19.08	20.19	20.59
	12H	22.75	23.84	23.18	24.22	24.65	18.77	19.86	19.20	20.24	20.67
4H	2H	19.72	21.02	20.12	21.36	21.74	16.64	17.94	17.04	18.29	18.67
	3H	21.69	22.77	22.10	23.17	23.57	18.32	19.40	18.73	19.80	20.20
	4H	22.43	23.41	22.86	23.82	24.26	19.02	19.99	19.45	20.41	20.85
	6H	23.03	23.87	23.48	24.32	24.77	19.61	20.45	20.06	20.90	21.36
	8H	23.23	24.02	23.69	24.47	24.94	19.81	20.61	20.28	21.05	21.52
	12H	23.38	24.09	23.86	24.57	25.04	19.98	20.68	20.46	21.16	21.63
8H	4H	22.49	23.29	22.96	23.73	24.20	19.39	20.18	19.85	20.62	21.09
	6H	23.15	23.81	23.65	24.30	24.78	20.09	20.74	20.58	21.23	21.71
	8H	23.41	24.00	23.92	24.51	24.99	20.37	20.96	20.88	21.47	21.96
	12H	23.62	24.14	24.13	24.63	25.19	20.61	21.13	21.12	21.63	22.19
12H	4H	22.49	23.20	22.97	23.67	24.15	19.43	20.14	19.91	20.62	21.09
	6H	23.15	23.74	23.66	24.25	24.74	20.16	20.75	20.67	21.26	21.74
	8H	23.44	23.96	23.95	24.46	25.02	20.50	21.02	21.01	21.51	22.08