

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1061844

Luminaire Tested: S125RDRP-H1090D830-X4F0-XX-UDD-SVL-W

Issue Date: 8/7/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1061844  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-83)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/7/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S125RDRP-H1090D830-X4F0-XX-UDD-SVL-W  
Description: DEFINE 5 WHITE REGRESSED DIRECT RECESSED HOUSING WITH SILVER STRAIGHT BLADE  
LOUVER WITH DIFFUSER  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 3000K CCT, 80 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1546.2 lumens  
Efficiency: N/A  
Efficacy: 49.6 lumens/watt  
Spacing Criteria (0/90/45): 0.83 / 1.15 / 1.02  
Luminous Opening: Rectangular (W 0.39' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 31.2  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1061844

CATALOG NUMBER: S125RDRP-H1090D830-X4F0-XX-UDD-SVL-W

### Luminous Intensity Polar Plot

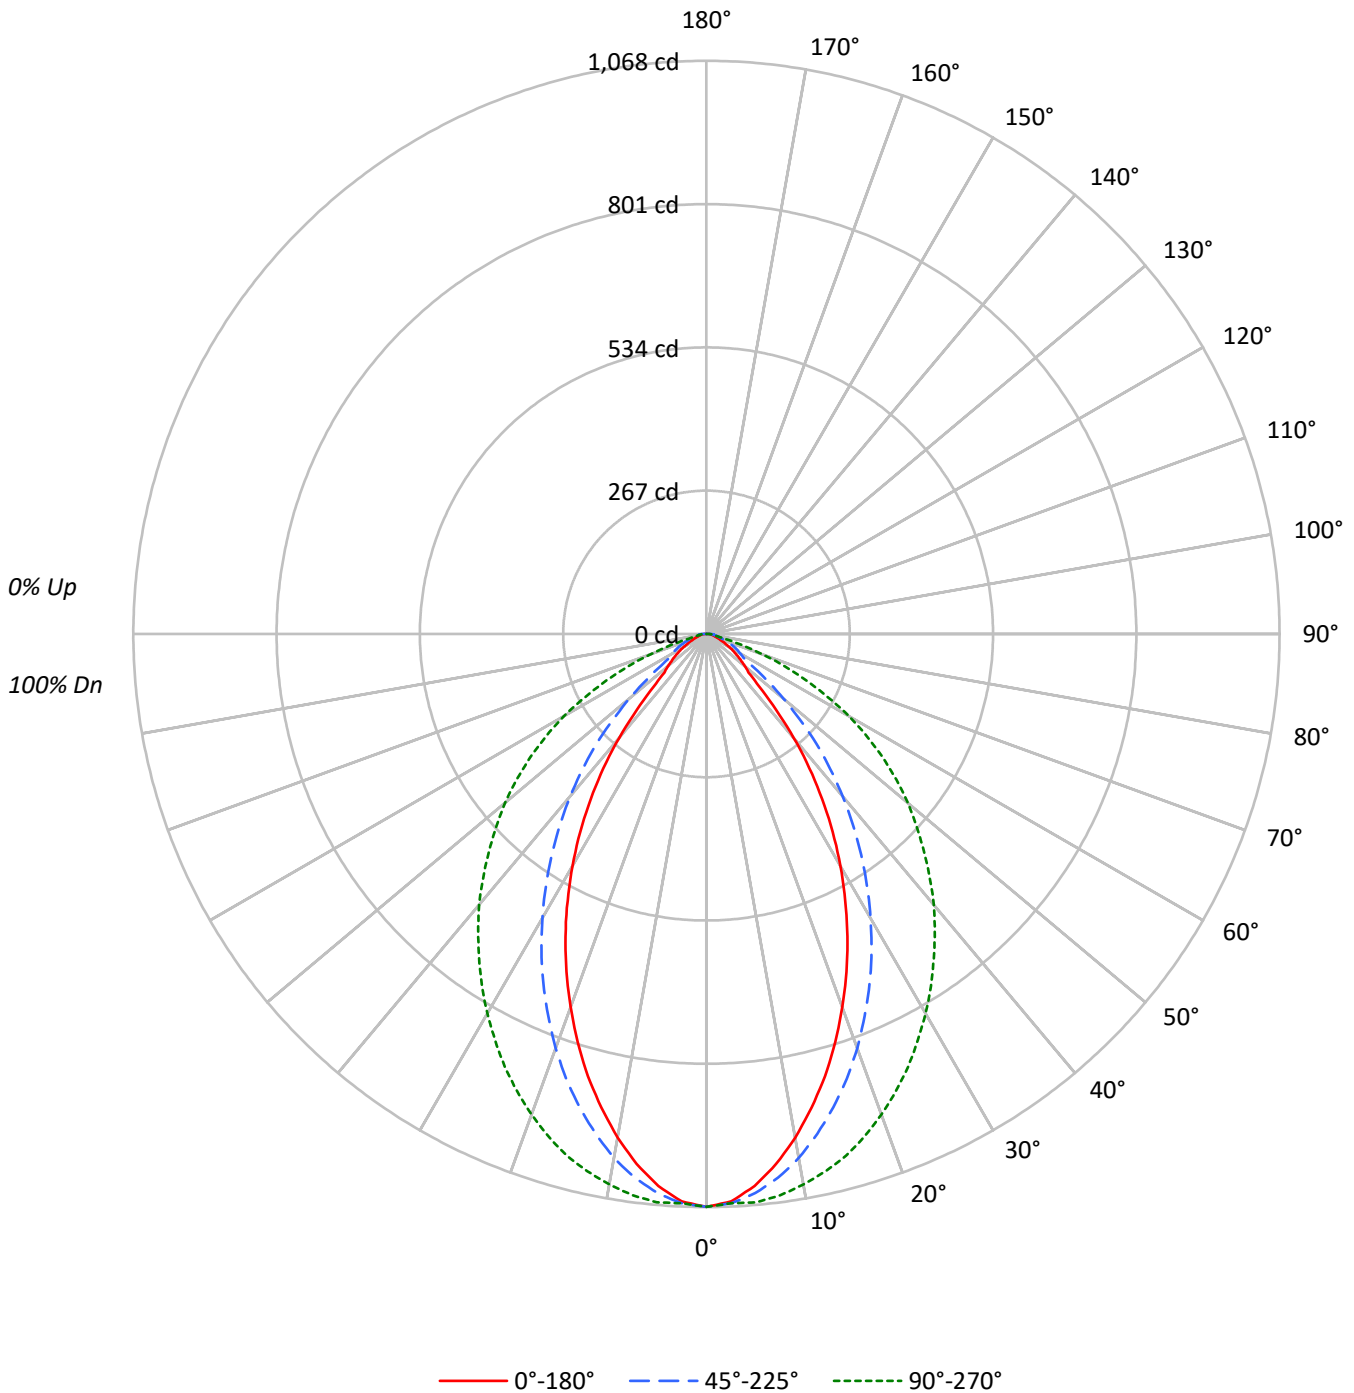



TEST NUMBER: P1061844

CATALOG NUMBER: S125RDRP-H1090D830-X4F0-XX-UDD-SVL-W

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	108	104	101	109	105	103	100	101	99	97	98	96	94	94	92	91	89
2	104	97	92	87	101	95	90	86	92	88	84	89	85	82	86	83	81	79
3	96	88	81	76	94	86	80	76	84	79	74	81	77	73	79	75	72	70
4	90	80	73	67	88	79	72	67	76	71	66	74	69	65	72	68	64	62
5	84	73	66	60	82	72	65	60	70	64	59	68	63	59	66	62	58	56
6	78	67	59	54	77	66	59	54	64	58	53	63	57	53	61	56	53	51
7	73	62	54	49	72	61	54	49	60	53	49	58	53	48	57	52	48	46
8	69	57	50	45	68	57	50	45	55	49	44	54	48	44	53	48	44	42
9	65	53	46	41	64	53	46	41	52	45	41	51	45	41	50	44	40	39
10	61	50	43	38	60	49	42	38	48	42	38	47	42	38	46	41	37	36

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	7350	7350	7350
5°	7135	7229	7346
10°	6662	6932	7281
15°	6081	6509	7172
20°	5419	6018	6982
25°	4722	5464	6757
30°	3968	4861	6494
35°	3156	4224	6207
40°	2274	3548	5924
45°	1348	2817	5578
50°	996	2005	5250
55°	844	1239	4806
60°	687	1000	4233
65°	536	924	3345
70°	457	799	2239
75°	423	694	904
80°	448	722	630
85°	537	1074	719

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 5578 cd/sqm



TEST NUMBER: P1061844

CATALOG NUMBER: S125RDRP-H1090D830-X4F0-XX-UDD-SVL-W

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	98.4	6.4
10°-20°	258.4	16.7
20°-30°	337.7	21.8
30°-40°	329.0	21.3
40°-50°	246.8	16.0
50°-60°	154.7	10.0
60°-70°	80.5	5.2
70°-80°	29.1	1.9
80°-90°	11.5	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	694.5	44.9
0°-40°	1023.5	66.2
0°-60°	1425.0	92.2
0°-90°	1546.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1546.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1068	1068	1068	1068	1068	
5°	1032	1046	1046	1054	1063	96
15°	853	878	913	970	1006	238
25°	622	656	719	817	889	284
35°	376	415	502	636	738	233
45°	138	179	289	447	573	116
55°	70	74	103	270	400	63
65°	33	35	57	109	205	34
75°	16	22	26	27	34	17
85°	7	11	14	12	9	7
90°	0	0	0	0	0	



TEST NUMBER: P1061844

CATALOG NUMBER: S125RDRP-H1090D830-X4F0-XX-UDD-SVL-W

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1067.5	1067.5	1067.5	1067.5	1067.5
2.5°	1058.4	1068.6	1061.8	1061.8	1061.8
5°	1032.3	1045.9	1045.9	1053.8	1062.9
7.5°	996.0	1011.9	1022.1	1041.4	1055.0
10°	952.9	972.2	991.5	1023.2	1041.4
12.5°	904.1	926.8	954.0	998.3	1025.5
15°	853.1	878.0	913.2	969.9	1006.2
17.5°	797.5	827.0	868.9	937.0	981.2
20°	739.6	769.1	821.3	898.4	952.9
22.5°	681.8	713.5	770.2	857.6	922.3
25°	621.6	655.7	719.2	816.8	889.4
27.5°	560.4	595.6	665.9	774.8	853.1
30°	499.1	535.4	611.4	729.4	816.8
32.5°	437.9	476.4	557.0	682.9	778.2
35°	375.5	415.2	502.5	636.4	738.5
37.5°	315.4	355.1	448.1	588.7	698.8
40°	253.0	296.1	394.8	541.1	659.1
42.5°	191.7	236.0	341.5	493.5	616.0
45°	138.4	179.2	289.3	446.9	572.9
47.5°	106.6	129.3	236.0	399.3	530.9
50°	93.0	99.8	187.2	355.1	490.1
52.5°	80.5	85.1	140.7	314.2	445.8
55°	70.3	73.7	103.2	270.0	400.4
57.5°	59.0	63.5	81.7	226.9	353.9
60°	49.9	52.2	72.6	187.2	307.4
62.5°	40.8	43.1	64.7	147.5	255.2
65°	32.9	35.2	56.7	108.9	205.3
67.5°	27.2	28.4	47.6	77.1	157.7
70°	22.7	23.8	39.7	53.3	111.2
72.5°	19.3	22.7	31.8	38.6	70.3
75°	15.9	21.6	26.1	27.2	34.0
77.5°	13.6	20.4	21.6	21.6	19.3
80°	11.3	17.0	18.2	17.0	15.9
82.5°	9.1	13.6	14.7	14.7	12.5
85°	6.8	11.3	13.6	12.5	9.1
87.5°	4.5	10.2	11.3	10.2	6.8
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1061844  
 CATALOG NUMBER: S125RDRP-H1090D830-X4F0-XX-UDD-SVL-W

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.85	8.20	7.21	8.51	8.83	16.46	17.81	16.83	18.13	18.44
	3H	7.70	8.90	8.08	9.23	9.60	17.30	18.50	17.68	18.83	19.20
	4H	8.13	9.25	8.53	9.60	9.98	17.38	18.50	17.78	18.85	19.23
	6H	8.56	9.58	8.97	9.95	10.35	17.36	18.39	17.77	18.76	19.15
	8H	8.73	9.71	9.16	10.10	10.51	17.35	18.32	17.78	18.71	19.12
	12H	8.90	9.83	9.33	10.21	10.64	17.33	18.27	17.77	18.65	19.08
4H	2H	7.81	8.93	8.21	9.28	9.66	16.32	17.44	16.73	17.79	18.18
	3H	8.86	9.78	9.27	10.18	10.58	17.23	18.15	17.65	18.55	18.96
	4H	9.43	10.25	9.86	10.66	11.11	17.34	18.16	17.77	18.57	19.02
	6H	10.02	10.73	10.49	11.18	11.64	17.36	18.07	17.83	18.52	18.98
	8H	10.26	10.92	10.73	11.37	11.84	17.36	18.03	17.83	18.47	18.94
	12H	10.49	11.07	10.97	11.56	12.03	17.38	17.96	17.86	18.44	18.92
8H	4H	9.90	10.56	10.37	11.01	11.48	17.26	17.92	17.73	18.37	18.84
	6H	10.71	11.25	11.21	11.75	12.23	17.32	17.86	17.82	18.35	18.83
	8H	11.09	11.58	11.61	12.09	12.58	17.35	17.83	17.87	18.35	18.84
	12H	11.48	11.91	11.99	12.40	12.97	17.41	17.84	17.93	18.34	18.91
12H	4H	9.95	10.54	10.44	11.02	11.49	17.23	17.81	17.71	18.30	18.77
	6H	10.83	11.32	11.35	11.83	12.32	17.28	17.77	17.80	18.28	18.77
	8H	11.32	11.75	11.83	12.24	12.81	17.35	17.78	17.87	18.28	18.85