

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1062092

Luminaire Tested: S125RDRP-H610D835-X4F0-XX-UDD-BVL-S

Issue Date: 8/7/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1062092  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-87)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/7/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S125RDRP-H610D835-X4F0-XX-UDD-BVL-S  
Description: DEFINE 5 SILVER REGRESSED DIRECT RECESSED HOUSING WITH BLACK STRAIGHT BLADE LOUVER WITH DIFFUSER  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 3500K CCT, 80 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 695.9 lumens  
Efficiency: N/A  
Efficacy: 40.0 lumens/watt  
Spacing Criteria (0/90/45): 0.79 / 1.14 / 0.98  
Luminous Opening: Rectangular (W 0.39' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 17.4  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1062092

CATALOG NUMBER: S125RDRP-H610D835-X4F0-XX-UDD-BVL-S

### Luminous Intensity Polar Plot

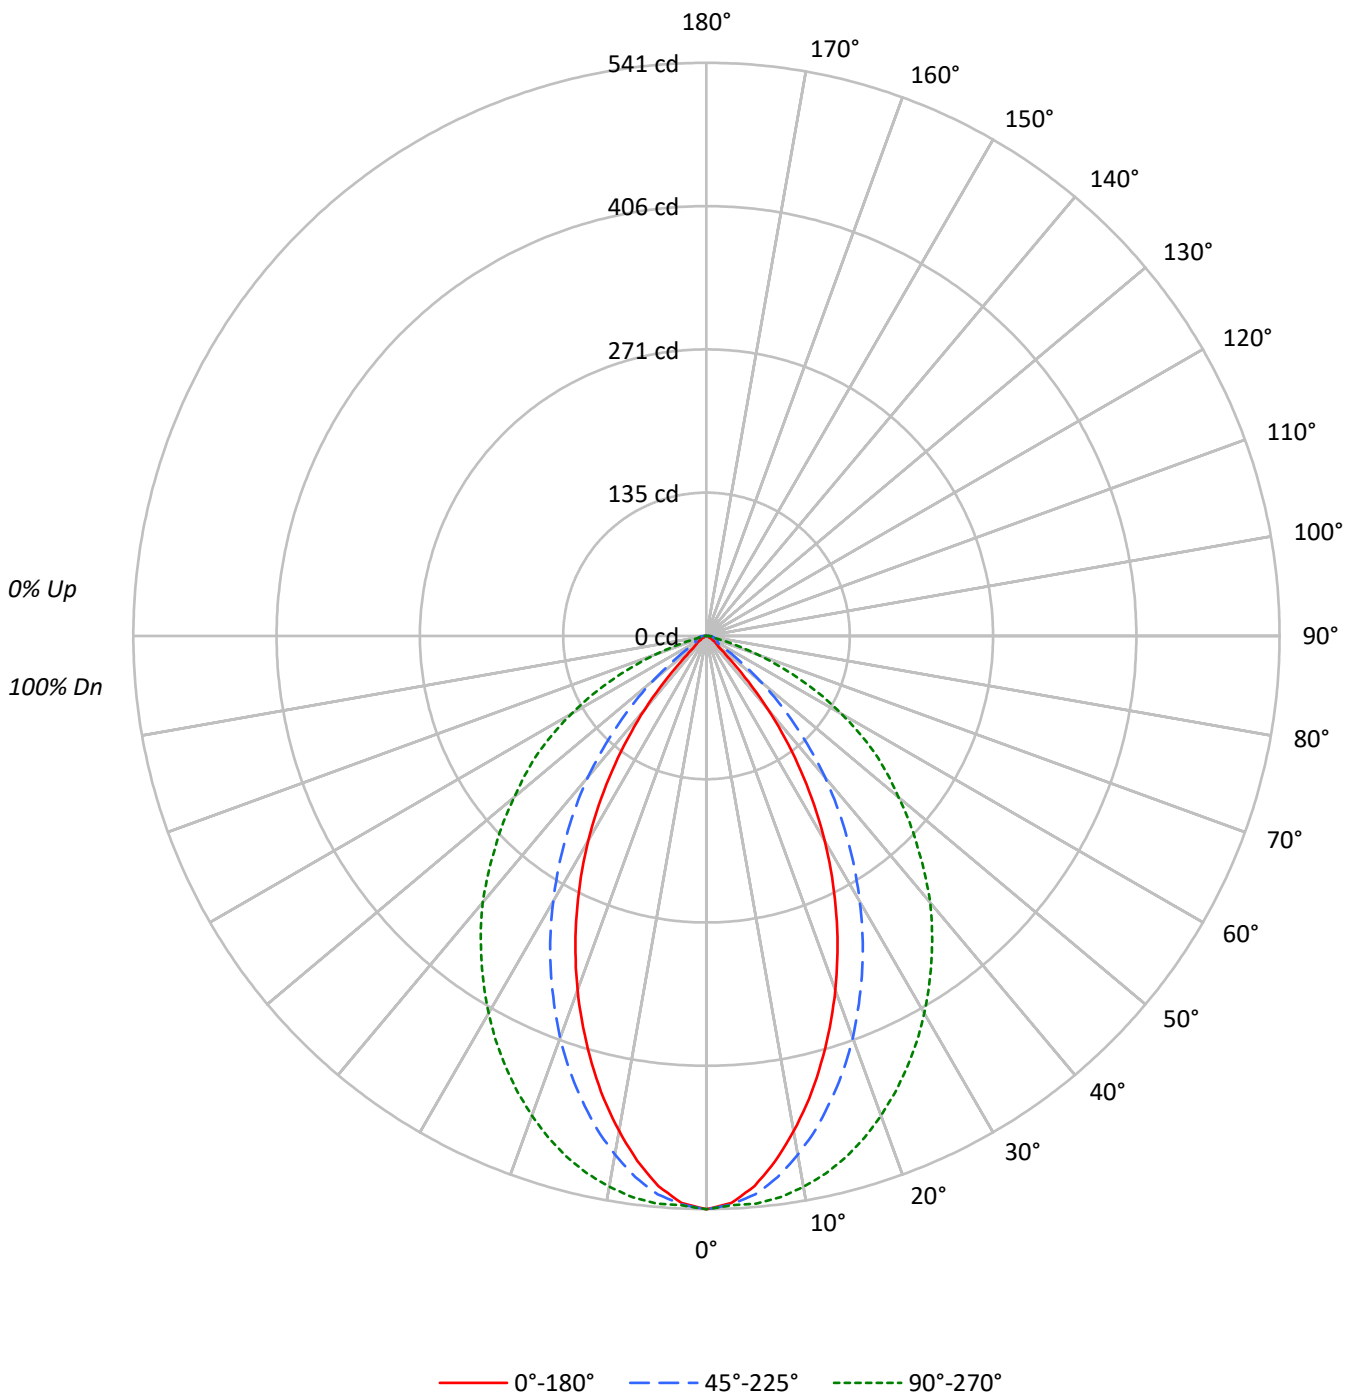



TEST NUMBER: P1062092

CATALOG NUMBER: S125RDRP-H610D835-X4F0-XX-UDD-BVL-S

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	98	98	96	95	95	93	92	90
2	105	98	93	89	102	97	92	88	93	89	86	90	87	84	87	85	82	81
3	98	90	83	78	95	88	82	78	85	80	76	83	79	75	80	77	74	72
4	91	82	75	70	89	81	74	69	78	73	68	76	71	68	74	70	67	65
5	85	75	68	63	84	74	67	62	72	66	62	70	65	61	69	64	61	59
6	80	69	62	57	78	68	62	57	67	61	56	65	60	56	64	59	55	54
7	75	64	57	52	74	63	56	52	62	56	51	61	55	51	59	54	51	49
8	71	60	52	47	69	59	52	47	58	52	47	57	51	47	55	50	47	45
9	67	55	48	44	66	55	48	44	54	48	44	53	47	43	52	47	43	42
10	63	52	45	41	62	51	45	40	50	44	40	50	44	40	49	44	40	39

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3726	3726	3726
5°	3602	3657	3717
10°	3317	3475	3690
15°	2978	3235	3629
20°	2607	2959	3530
25°	2202	2642	3407
30°	1775	2299	3268
35°	1305	1938	3114
40°	814	1563	2953
45°	305	1142	2745
50°	142	713	2534
55°	104	296	2343
60°	73	156	2028
65°	44	184	1606
70°	40	215	1019
75°	53	213	319
80°	79	266	238
85°	158	419	316

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 45°  
 Luminance: 2745 cd/sqm



TEST NUMBER: P1062092

CATALOG NUMBER: S125RDRP-H610D835-X4F0-XX-UDD-BVL-S

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	49.6	7.1
10°-20°	128.5	18.5
20°-30°	163.6	23.5
30°-40°	152.3	21.9
40°-50°	104.3	15.0
50°-60°	57.5	8.3
60°-70°	27.2	3.9
70°-80°	8.5	1.2
80°-90°	4.4	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	341.7	49.1
0°-40°	494.0	71.0
0°-60°	655.8	94.2
0°-90°	695.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	695.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	541	541	541	541	541	
5°	521	528	529	533	538	48
15°	418	431	454	488	509	116
25°	290	308	348	404	448	132
35°	155	177	231	306	370	96
45°	31	53	117	208	282	30
55°	9	10	25	116	195	8
65°	3	3	11	43	99	3
75°	2	3	8	9	12	2
85°	2	5	5	5	4	2
90°	0	0	0	0	0	



TEST NUMBER: P1062092

CATALOG NUMBER: S125RDRP-H610D835-X4F0-XX-UDD-BVL-S

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	541.1	541.1	541.1	541.1	541.1
2.5°	535.8	541.1	537.1	537.1	537.8
5°	521.1	527.8	529.1	533.1	537.8
7.5°	499.8	508.4	515.1	526.4	534.4
10°	474.5	485.1	497.1	515.8	527.8
12.5°	447.8	459.1	477.1	503.1	519.8
15°	417.8	431.1	453.8	487.8	509.1
17.5°	387.2	401.8	429.8	469.8	496.4
20°	355.8	371.2	403.8	448.5	481.8
22.5°	323.2	339.8	375.8	426.5	465.8
25°	289.9	307.9	347.8	403.8	448.5
27.5°	256.6	275.2	319.2	380.5	430.5
30°	223.2	242.6	289.2	356.5	411.1
32.5°	189.2	210.6	259.9	332.5	391.2
35°	155.3	177.3	230.6	306.5	370.5
37.5°	121.9	144.6	201.9	281.9	349.8
40°	90.6	113.3	173.9	257.2	328.5
42.5°	58.6	82.6	144.6	231.9	305.2
45°	31.3	52.6	117.3	207.9	281.9
47.5°	16.7	28.0	91.3	183.9	259.9
50°	13.3	15.3	66.6	159.9	236.6
52.5°	10.7	12.0	42.6	135.3	215.9
55°	8.7	10.0	24.7	115.9	195.2
57.5°	6.7	8.0	14.0	96.6	171.3
60°	5.3	6.0	11.3	77.3	147.3
62.5°	3.3	4.7	11.3	60.0	123.3
65°	2.7	3.3	11.3	42.6	98.6
67.5°	2.7	2.7	11.3	28.0	74.0
70°	2.0	2.0	10.7	18.0	50.6
72.5°	2.0	2.0	9.3	12.0	29.3
75°	2.0	3.3	8.0	8.7	12.0
77.5°	2.0	5.3	7.3	7.3	6.7
80°	2.0	5.3	6.7	6.0	6.0
82.5°	2.0	5.3	5.3	5.3	4.7
85°	2.0	4.7	5.3	4.7	4.0
87.5°	2.0	4.7	4.7	4.7	2.7
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1062092  
 CATALOG NUMBER: S125RDRP-H610D835-X4F0-XX-UDD-BVL-S

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	0.00	0.00	0.00	0.00	0.00	13.61	14.90	13.98	15.21	15.53
	3H	0.00	0.00	0.00	0.00	0.00	14.40	15.54	14.78	15.87	16.23
	4H	0.00	0.00	0.00	0.00	0.00	14.43	15.49	14.83	15.84	16.22
	6H	0.00	0.00	0.00	0.00	0.00	14.38	15.36	14.80	15.73	16.12
	8H	0.00	0.00	0.00	0.00	0.00	14.36	15.28	14.79	15.67	16.08
	12H	0.00	0.00	0.00	0.00	0.42	14.34	15.22	14.78	15.60	16.03
4H	2H	0.00	0.00	0.00	0.00	0.00	13.40	14.45	13.80	14.81	15.19
	3H	0.00	0.00	0.00	0.00	0.00	14.23	15.09	14.64	15.49	15.90
	4H	0.00	0.00	0.00	0.05	0.49	14.26	15.03	14.70	15.45	15.89
	6H	0.35	1.01	0.81	1.46	1.93	14.25	14.91	14.71	15.36	15.83
	8H	1.09	1.71	1.56	2.15	2.62	14.23	14.85	14.70	15.30	15.77
	12H	1.83	2.38	2.32	2.86	3.34	14.23	14.78	14.72	15.26	15.74
8H	4H	0.90	1.52	1.37	1.97	2.44	14.15	14.77	14.62	15.21	15.68
	6H	2.64	3.14	3.14	3.64	4.12	14.15	14.65	14.65	15.15	15.63
	8H	3.59	4.04	4.11	4.56	5.05	14.15	14.61	14.68	15.12	15.62
	12H	4.53	4.93	5.04	5.42	6.00	14.20	14.60	14.72	15.10	15.67
12H	4H	1.20	1.75	1.69	2.23	2.71	14.10	14.65	14.59	15.13	15.61
	6H	3.10	3.55	3.62	4.07	4.56	14.10	14.56	14.63	15.07	15.57
	8H	4.22	4.62	4.74	5.12	5.69	14.14	14.54	14.66	15.04	15.61