

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1062061

Luminaire Tested: S125RDRP-H375D935-X4F0-XX-UDD-WVL-B

Issue Date: 8/7/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1062061  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2406-143-46)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/7/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S125RDRP-H375D935-X4F0-XX-UDD-WVL-B  
Description: DEFINE 5 BLACK REGRESSED DIRECT RECESSED HOUSING WITH WHITE STRAIGHT BLADE  
LOUVER WITH DIFFUSER  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 3500K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 628.0 lumens  
Efficiency: N/A  
Efficacy: 53.7 lumens/watt  
Spacing Criteria (0/90/45): 1.19 / 0.95 / 1.11  
Luminous Opening: Rectangular (W 0.39' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 11.7  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1062061

CATALOG NUMBER: S125RDRP-H375D935-X4F0-XX-UDD-WVL-B

### Luminous Intensity Polar Plot

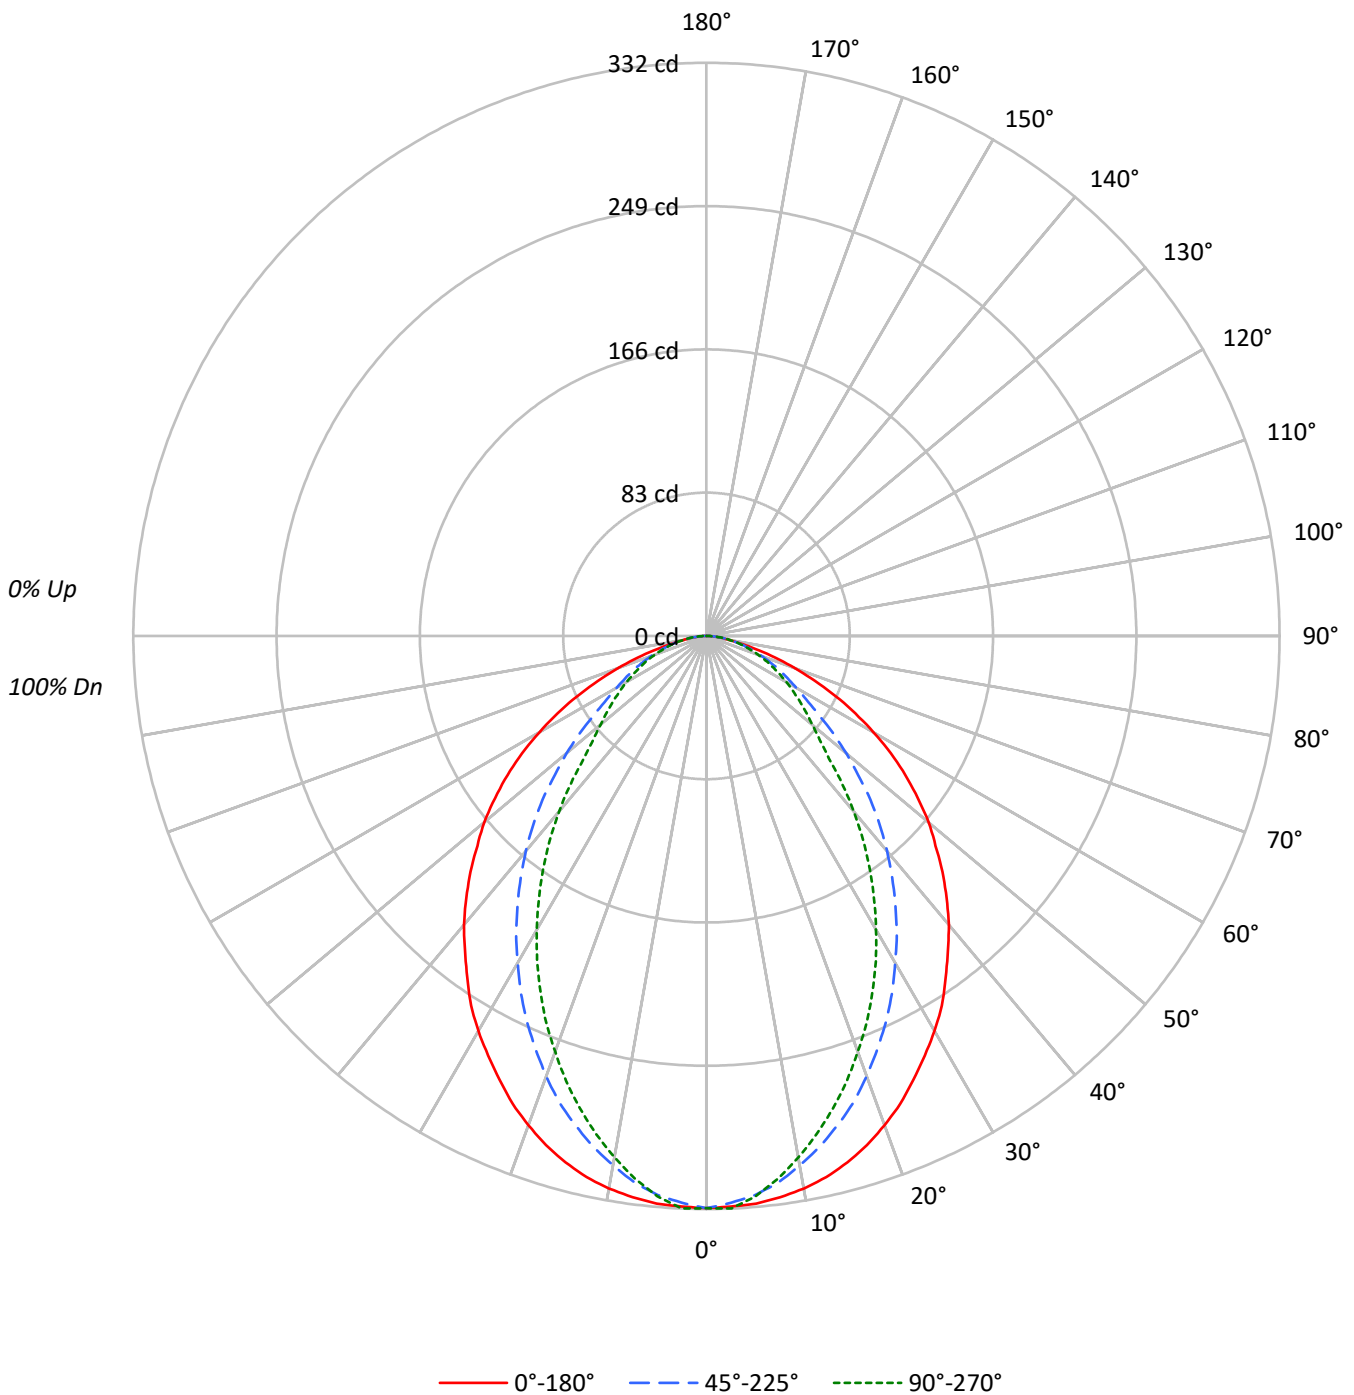



TEST NUMBER: P1062061

CATALOG NUMBER: S125RDRP-H375D935-X4F0-XX-UDD-WVL-B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87
2	101	94	88	83	99	92	87	82	89	84	80	86	82	78	83	80	77	75
3	93	84	77	71	91	82	76	70	80	74	69	77	72	68	74	70	67	65
4	86	76	68	61	84	74	67	61	72	65	60	70	64	59	67	63	59	57
5	80	68	60	54	78	67	59	54	65	58	53	63	57	53	61	56	52	50
6	74	62	54	48	73	61	53	48	59	53	47	58	52	47	56	51	47	45
7	69	57	49	43	68	56	48	43	55	48	43	53	47	42	52	46	42	40
8	65	52	44	39	63	52	44	39	50	43	39	49	43	38	48	42	38	36
9	61	48	41	35	60	48	40	35	47	40	35	46	39	35	45	39	35	33
10	57	45	37	32	56	44	37	32	43	37	32	42	36	32	42	36	32	30

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2282	2282	2282
5°	2281	2246	2252
10°	2272	2177	2144
15°	2250	2091	2019
20°	2210	1989	1878
25°	2155	1870	1728
30°	2100	1737	1562
35°	2030	1604	1386
40°	1964	1462	1194
45°	1882	1308	978
50°	1801	1133	856
55°	1689	946	791
60°	1541	828	738
65°	1349	756	686
70°	1095	680	638
75°	785	622	593
80°	543	555	555
85°	395	482	513

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1882 cd/sqm

TEST NUMBER: P1062061

CATALOG NUMBER: S125RDRP-H375D935-X4F0-XX-UDD-WVL-B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	30.8	4.9
10°-20°	83.4	13.3
20°-30°	115.2	18.3
30°-40°	122.7	19.5
40°-50°	107.8	17.2
50°-60°	81.8	13.0
60°-70°	53.1	8.5
70°-80°	26.3	4.2
80°-90°	6.9	1.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	229.4	36.5
0°-40°	352.2	56.1
0°-60°	541.7	86.3
0°-90°	628.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	628.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	332	332	332	332	332	
5°	330	329	325	326	326	31
15°	316	308	293	286	283	89
25°	284	268	246	234	228	131
35°	242	219	191	174	165	151
45°	193	166	134	110	100	149
55°	141	113	79	68	66	126
65°	83	62	46	43	42	82
75°	30	26	23	23	22	33
85°	5	6	6	6	6	6
90°	0	0	0	0	0	



TEST NUMBER: P1062061

CATALOG NUMBER: S125RDRP-H375D935-X4F0-XX-UDD-WVL-B

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	331.5	331.5	331.5	331.5	331.5
2.5°	330.8	331.5	328.6	331.2	331.9
5°	330.1	329.4	325.0	326.1	325.8
7.5°	327.9	326.5	319.3	318.6	317.1
10°	325.0	321.4	311.4	308.8	306.7
12.5°	321.1	315.3	303.1	298.0	295.5
15°	315.7	308.5	293.4	286.5	283.3
17.5°	309.2	299.1	283.3	273.9	270.3
20°	301.6	289.8	271.4	260.6	256.3
22.5°	293.4	279.3	258.8	247.3	242.6
25°	283.6	268.2	246.2	233.6	227.5
27.5°	273.9	256.7	232.9	218.9	212.4
30°	264.2	244.4	218.5	203.4	196.5
32.5°	253.8	231.8	205.2	188.6	180.7
35°	241.5	219.2	190.8	173.5	164.9
37.5°	229.7	205.9	176.7	157.3	149.0
40°	218.5	193.3	162.7	141.5	132.8
42.5°	205.9	180.0	148.7	126.3	116.6
45°	193.3	166.3	134.3	110.1	100.4
47.5°	180.0	153.3	119.1	95.4	88.9
50°	168.1	140.0	105.8	84.2	79.9
52.5°	154.4	127.1	92.1	75.6	72.7
55°	140.7	113.0	78.8	68.0	65.9
57.5°	126.7	100.4	68.4	61.6	59.4
60°	111.9	87.5	60.1	54.7	53.6
62.5°	97.2	74.2	52.9	49.0	47.5
65°	82.8	61.6	46.4	42.8	42.1
67.5°	68.0	50.0	40.0	37.4	37.1
70°	54.4	40.7	33.8	32.4	31.7
72.5°	41.8	32.4	28.4	27.4	27.0
75°	29.5	25.9	23.4	22.7	22.3
77.5°	19.8	19.8	18.7	18.0	18.4
80°	13.7	14.4	14.0	14.0	14.0
82.5°	9.0	9.7	10.1	10.1	10.1
85°	5.0	5.8	6.1	6.1	6.5
87.5°	1.8	2.2	2.5	2.9	2.9
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P1062061

CATALOG NUMBER: S125RDRP-H375D935-X4F0-XX-UDD-WVL-B

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.42	14.91	13.78	15.22	15.54	9.67	11.16	10.03	11.47	11.79
	3H	14.73	16.07	15.11	16.40	16.76	11.25	12.58	11.63	12.91	13.27
	4H	15.10	16.35	15.50	16.70	17.08	11.85	13.10	12.25	13.45	13.83
	6H	15.28	16.43	15.69	16.80	17.19	12.32	13.48	12.73	13.85	14.24
	8H	15.31	16.41	15.74	16.80	17.21	12.48	13.58	12.91	13.97	14.37
	12H	15.33	16.38	15.76	16.76	17.19	12.59	13.65	13.03	14.03	14.46
4H	2H	13.53	14.78	13.93	15.13	15.51	10.33	11.58	10.73	11.93	12.31
	3H	15.02	16.06	15.43	16.46	16.86	12.11	13.14	12.52	13.54	13.95
	4H	15.49	16.43	15.93	16.84	17.28	12.82	13.76	13.26	14.17	14.61
	6H	15.78	16.59	16.24	17.03	17.49	13.41	14.22	13.87	14.67	15.13
	8H	15.85	16.61	16.31	17.05	17.52	13.62	14.38	14.08	14.82	15.29
	12H	15.89	16.56	16.37	17.04	17.52	13.77	14.45	14.26	14.93	15.40
8H	4H	15.58	16.33	16.04	16.78	17.25	13.14	13.89	13.60	14.34	14.81
	6H	15.94	16.57	16.44	17.06	17.54	13.84	14.47	14.34	14.96	15.44
	8H	16.06	16.62	16.57	17.13	17.62	14.12	14.68	14.64	15.19	15.68
	12H	16.14	16.64	16.65	17.13	17.70	14.35	14.85	14.86	15.34	15.90
12H	4H	15.57	16.25	16.05	16.73	17.20	13.16	13.84	13.64	14.32	14.79
	6H	15.94	16.50	16.46	17.02	17.50	13.89	14.45	14.41	14.96	15.45
	8H	16.10	16.60	16.61	17.09	17.66	14.23	14.72	14.74	15.22	15.78