

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1062142

Luminaire Tested: S125RDRP-H610D935-X4F0-XX-UDD-WVL-B

Issue Date: 8/7/2025

**Test Information**

Test Method: LM-79-2024  
Report Number: P1062142  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2406-143-46)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/7/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S125RDRP-H610D935-X4F0-XX-UDD-WVL-B  
Description: DEFINE 5 BLACK REGRESSED DIRECT RECESSED HOUSING WITH WHITE STRAIGHT BLADE  
LOUVER WITH DIFFUSER  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 3500K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1000.1 lumens  
Efficiency: N/A  
Efficacy: 57.5 lumens/watt  
Spacing Criteria (0/90/45): 1.19 / 0.95 / 1.11  
Luminous Opening: Rectangular (W 0.39' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 17.4  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1062142

CATALOG NUMBER: S125RDRP-H610D935-X4F0-XX-UDD-WVL-B

### Luminous Intensity Polar Plot

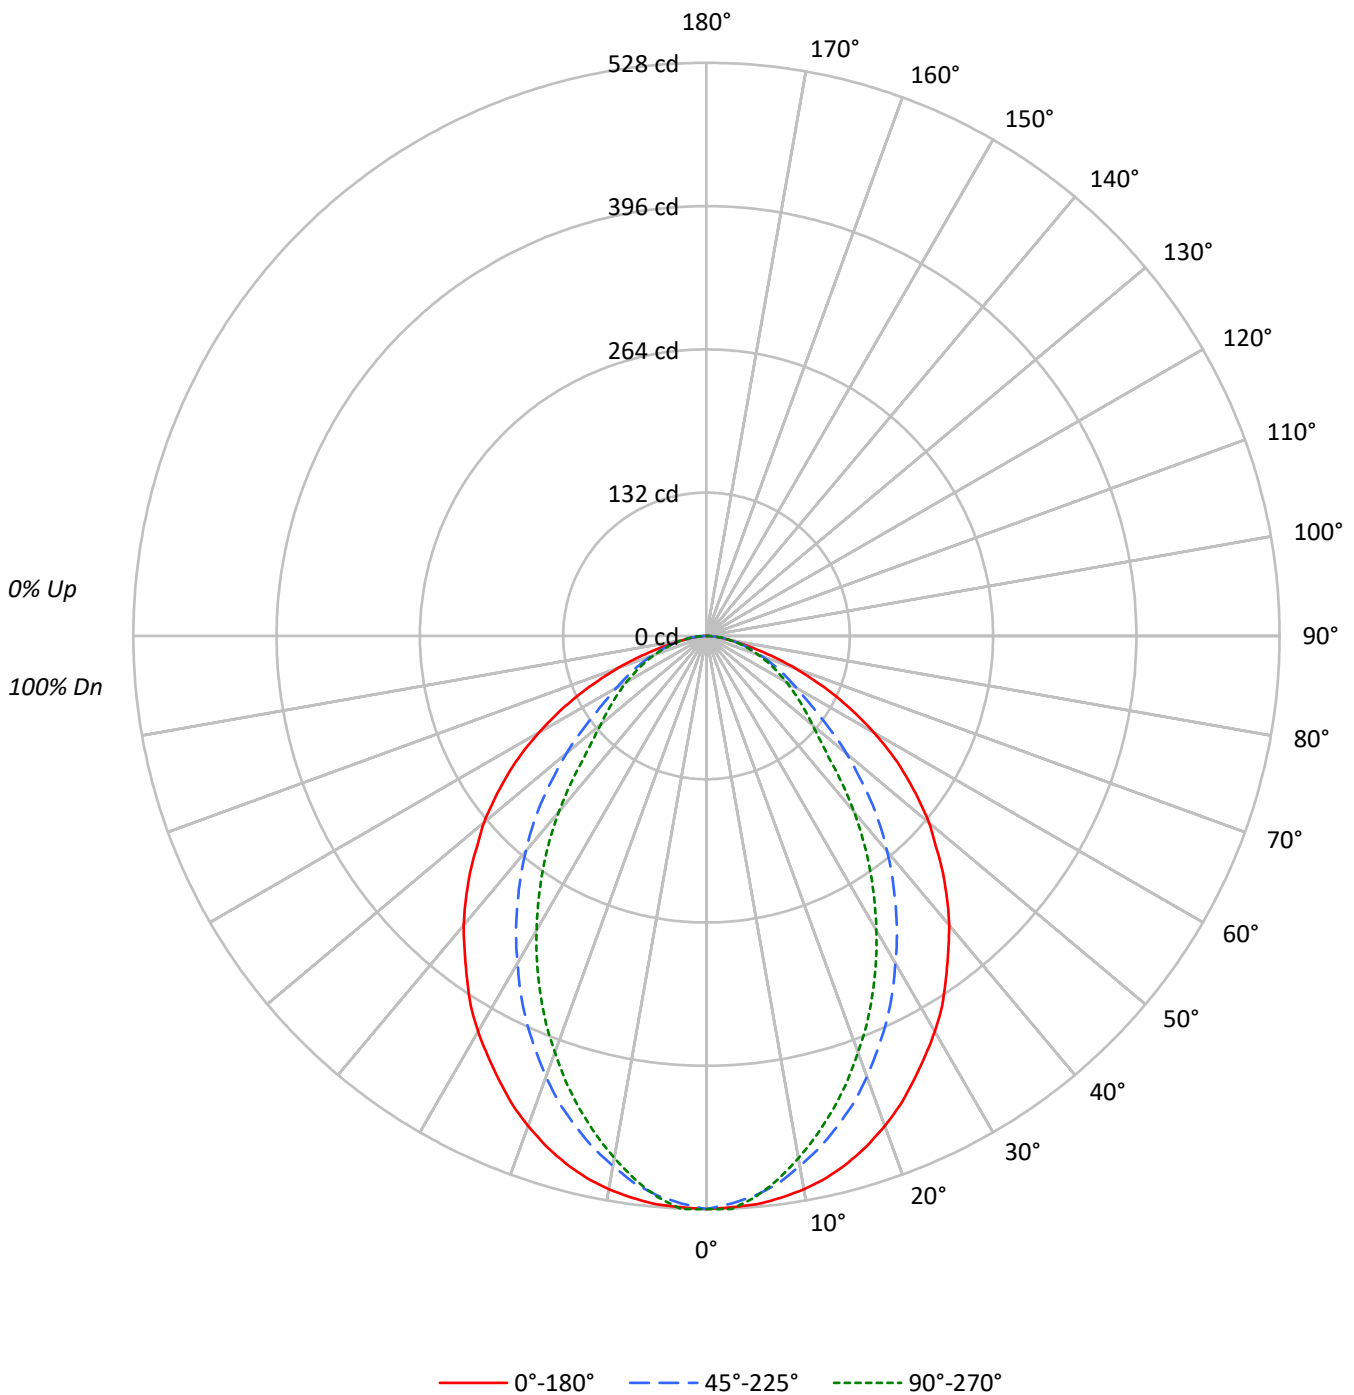



TEST NUMBER: P1062142

CATALOG NUMBER: S125RDRP-H610D935-X4F0-XX-UDD-WVL-B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87
2	101	94	88	83	99	92	87	82	89	84	80	86	82	78	83	80	77	75
3	93	84	77	71	91	82	76	70	80	74	69	77	72	68	74	70	67	65
4	86	75	68	61	84	74	67	61	72	65	60	70	64	59	67	63	59	57
5	80	68	60	54	78	67	59	54	65	58	53	63	57	53	61	56	52	50
6	74	62	54	48	73	61	53	48	59	53	47	58	52	47	56	51	47	45
7	69	57	49	43	68	56	48	43	55	48	43	53	47	42	52	46	42	40
8	65	52	44	39	63	52	44	39	50	43	39	49	43	38	48	42	38	36
9	61	48	41	35	60	48	40	35	47	40	35	46	39	35	45	39	35	33
10	57	45	37	32	56	44	37	32	43	37	32	42	36	32	42	36	32	30

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3635	3635	3635
5°	3633	3577	3586
10°	3619	3466	3415
15°	3583	3330	3215
20°	3520	3167	2990
25°	3432	2979	2752
30°	3346	2767	2488
35°	3233	2554	2206
40°	3128	2329	1901
45°	2997	2082	1557
50°	2867	1805	1364
55°	2690	1507	1259
60°	2455	1318	1176
65°	2147	1204	1093
70°	1743	1085	1015
75°	1250	992	944
80°	864	888	888
85°	632	766	814

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2997 cd/sqm



TEST NUMBER: P1062142

CATALOG NUMBER: S125RDRP-H610D935-X4F0-XX-UDD-WVL-B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	49.1	4.9
10°-20°	132.8	13.3
20°-30°	183.5	18.3
30°-40°	195.5	19.5
40°-50°	171.7	17.2
50°-60°	130.2	13.0
60°-70°	84.5	8.5
70°-80°	41.9	4.2
80°-90°	11.0	1.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	365.4	36.5
0°-40°	560.8	56.1
0°-60°	862.7	86.3
0°-90°	1000.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1000.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	528	528	528	528	528	
5°	526	524	518	519	519	50
15°	503	491	467	456	451	142
25°	452	427	392	372	362	208
35°	385	349	304	276	262	241
45°	308	265	214	175	160	237
55°	224	180	126	108	105	200
65°	132	98	74	68	67	130
75°	47	41	37	36	36	52
85°	8	9	10	10	10	10
90°	0	0	0	0	0	



TEST NUMBER: P1062142

CATALOG NUMBER: S125RDRP-H610D935-X4F0-XX-UDD-WVL-B

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	528.0	528.0	528.0	528.0	528.0
2.5°	526.8	528.0	523.4	527.4	528.5
5°	525.7	524.5	517.6	519.4	518.8
7.5°	522.2	519.9	508.5	507.3	505.0
10°	517.6	511.9	495.8	491.8	488.4
12.5°	511.3	502.2	482.7	474.6	470.6
15°	502.7	491.3	467.2	456.3	451.1
17.5°	492.4	476.4	451.1	436.2	430.5
20°	480.4	461.5	432.2	415.0	408.1
22.5°	467.2	444.8	412.2	393.8	386.4
25°	451.7	427.1	392.1	372.0	362.3
27.5°	436.2	408.7	370.9	348.5	338.2
30°	420.8	389.2	348.0	323.9	313.0
32.5°	404.1	369.2	326.7	300.4	287.8
35°	384.6	349.1	303.8	276.3	262.5
37.5°	365.7	327.9	281.5	250.5	237.3
40°	348.0	307.8	259.1	225.3	211.5
42.5°	327.9	286.6	236.7	201.2	185.7
45°	307.8	264.8	213.8	175.4	159.9
47.5°	286.6	244.2	189.7	151.9	141.6
50°	267.7	223.0	168.5	134.1	127.3
52.5°	245.9	202.4	146.7	120.4	115.8
55°	224.1	180.0	125.5	108.3	104.9
57.5°	201.8	159.9	108.9	98.0	94.6
60°	178.3	139.3	95.7	87.1	85.4
62.5°	154.8	118.1	84.3	78.0	75.7
65°	131.8	98.0	73.9	68.2	67.1
67.5°	108.3	79.7	63.6	59.6	59.0
70°	86.6	64.8	53.9	51.6	50.4
72.5°	66.5	51.6	45.3	43.6	43.0
75°	47.0	41.3	37.3	36.1	35.5
77.5°	31.5	31.5	29.8	28.7	29.2
80°	21.8	22.9	22.4	22.4	22.4
82.5°	14.3	15.5	16.1	16.1	16.1
85°	8.0	9.2	9.7	9.7	10.3
87.5°	2.9	3.4	4.0	4.6	4.6
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1062142  
 CATALOG NUMBER: S125RDRP-H610D935-X4F0-XX-UDD-WVL-B

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.04	16.53	15.40	16.84	17.16	11.28	12.77	11.64	13.08	13.40
	3H	16.35	17.68	16.73	18.01	18.37	12.86	14.20	13.24	14.52	14.89
	4H	16.72	17.97	17.12	18.32	18.70	13.46	14.72	13.86	15.06	15.44
	6H	16.89	18.05	17.31	18.42	18.81	13.93	15.09	14.35	15.46	15.85
	8H	16.93	18.03	17.36	18.42	18.82	14.10	15.20	14.52	15.59	15.99
	12H	16.94	18.00	17.37	18.38	18.81	14.21	15.26	14.64	15.64	16.07
4H	2H	15.15	16.40	15.55	16.75	17.13	11.94	13.19	12.34	13.54	13.92
	3H	16.64	17.67	17.05	18.07	18.48	13.72	14.76	14.13	15.16	15.56
	4H	17.11	18.05	17.54	18.46	18.90	14.44	15.37	14.87	15.79	16.23
	6H	17.40	18.21	17.86	18.65	19.11	15.03	15.84	15.49	16.28	16.74
	8H	17.47	18.22	17.93	18.67	19.14	15.23	15.99	15.70	16.44	16.90
	12H	17.51	18.18	17.99	18.66	19.13	15.39	16.06	15.87	16.54	17.02
8H	4H	17.19	17.95	17.66	18.40	18.86	14.75	15.51	15.21	15.95	16.42
	6H	17.56	18.18	18.06	18.67	19.15	15.46	16.08	15.96	16.57	17.05
	8H	17.67	18.23	18.19	18.75	19.23	15.74	16.30	16.25	16.81	17.30
	12H	17.76	18.26	18.27	18.75	19.31	15.97	16.46	16.48	16.96	17.52
12H	4H	17.19	17.86	17.67	18.34	18.82	14.78	15.45	15.26	15.93	16.40
	6H	17.56	18.12	18.08	18.63	19.12	15.51	16.07	16.02	16.58	17.07
	8H	17.72	18.22	18.23	18.71	19.27	15.85	16.34	16.36	16.84	17.40