

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2024 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1062223

Luminaire Tested: S125RDRP-H850D935-X4F0-XX-UDD-WVL-B

Issue Date: 8/7/2025

Test Information

Test Method: LM-79-2024
Report Number: P1062223
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2406-143-46)
Test Lab: INNOVATION CENTER
Issue Date: 8/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S125RDRP-H850D935-X4F0-XX-UDD-WVL-B
Description: DEFINE 5 BLACK REGRESSED DIRECT RECESSED HOUSING WITH WHITE STRAIGHT BLADE LOUVER WITH DIFFUSER
HIGH PERFORMANCE LIGHT ENGINE
Light Source: 3500K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1400.7 lumens
Efficiency: N/A
Efficacy: 59.6 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 0.95 / 1.11
Luminous Opening: Rectangular (W 0.39' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 23.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1062223

CATALOG NUMBER: S125RDRP-H850D935-X4F0-XX-UDD-WVL-B

Luminous Intensity Polar Plot

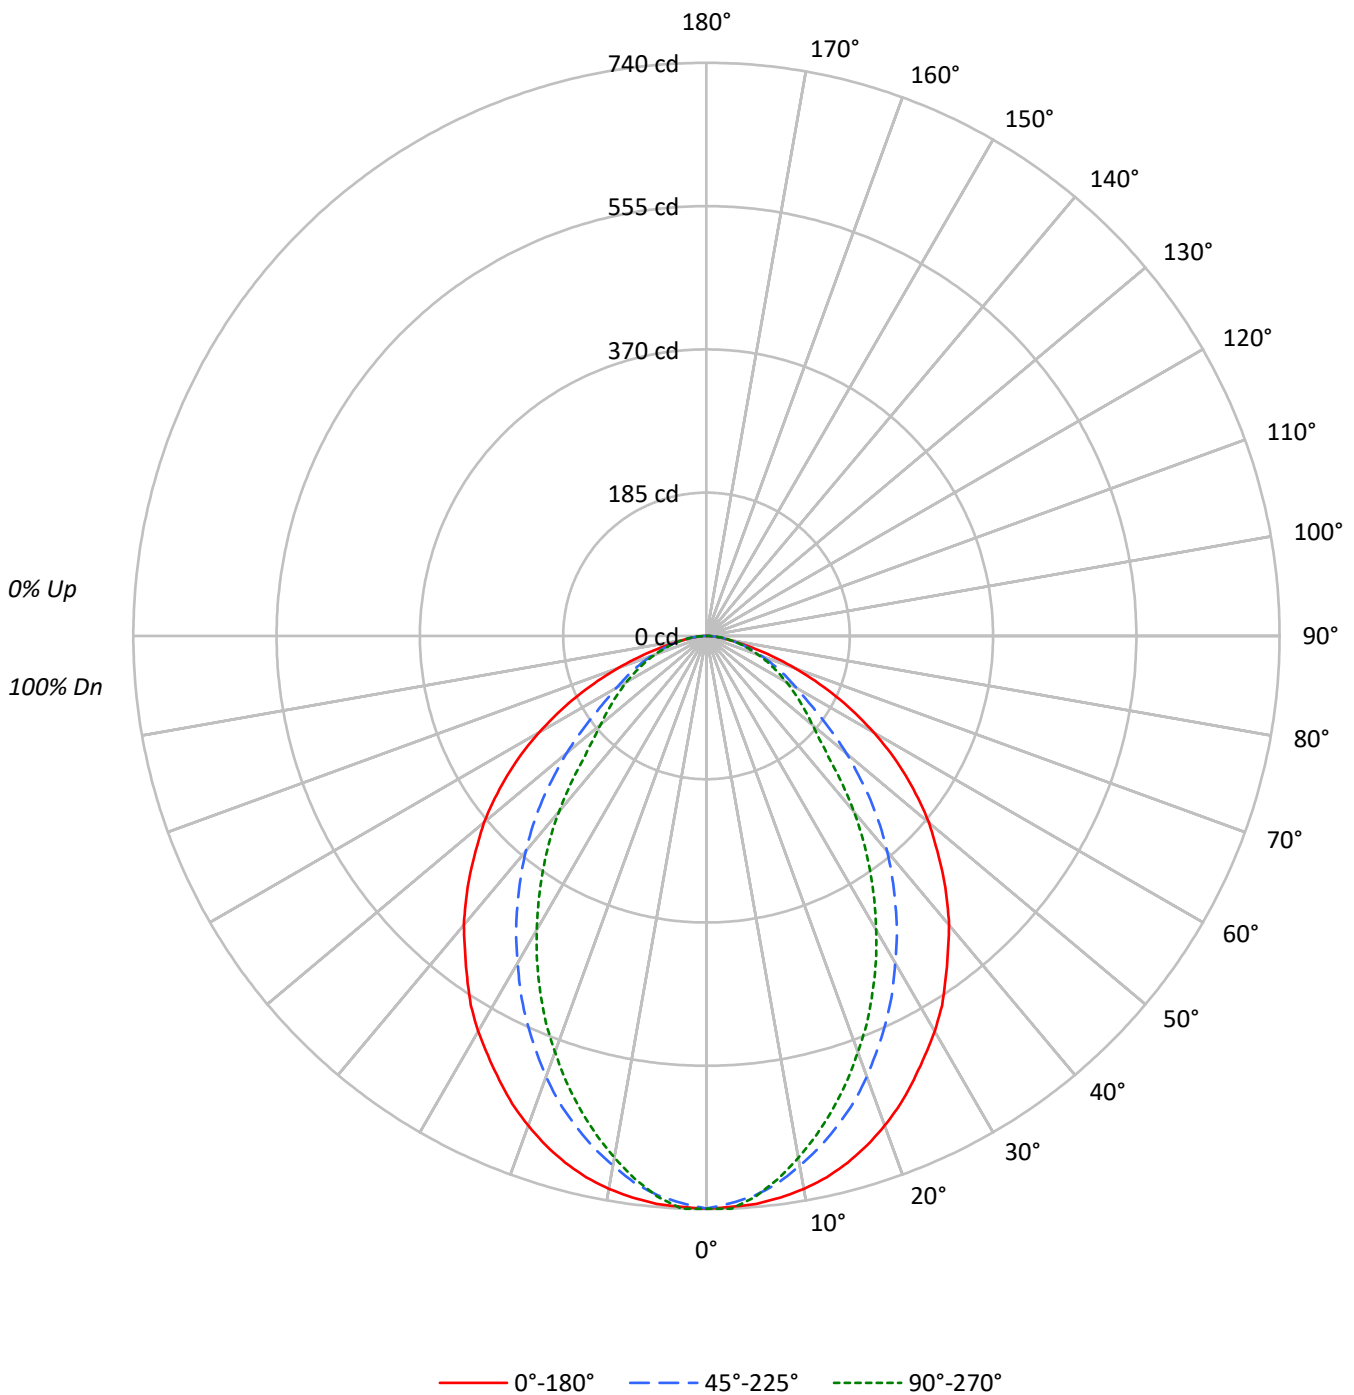



TEST NUMBER: P1062223

CATALOG NUMBER: S125RDRP-H850D935-X4F0-XX-UDD-WVL-B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87
2	101	94	88	83	99	92	87	82	89	84	80	86	82	78	83	80	77	75
3	93	84	77	71	91	82	76	70	80	74	69	77	72	68	74	70	67	65
4	86	76	68	61	84	74	67	61	72	65	60	70	64	59	67	63	59	57
5	80	68	60	54	78	67	59	54	65	58	53	63	57	53	61	56	52	50
6	74	62	54	48	73	61	53	48	59	53	47	58	52	47	56	51	47	45
7	69	57	49	43	68	56	48	43	55	48	43	53	47	42	52	46	42	40
8	65	52	44	39	63	52	44	39	50	43	39	49	43	38	48	42	38	36
9	61	48	41	35	60	48	40	35	47	40	35	46	39	35	45	39	35	33
10	57	45	37	32	56	44	37	32	43	37	32	42	36	32	42	36	32	30

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5091	5091	5091
5°	5088	5010	5021
10°	5068	4855	4782
15°	5019	4664	4504
20°	4930	4435	4188
25°	4806	4172	3855
30°	4685	3874	3485
35°	4528	3576	3091
40°	4380	3262	2662
45°	4198	2915	2181
50°	4016	2528	1909
55°	3768	2110	1763
60°	3438	1847	1647
65°	3007	1688	1530
70°	2440	1520	1421
75°	1750	1389	1325
80°	1209	1241	1241
85°	885	1074	1145

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 4198 cd/sqm

TEST NUMBER: P1062223

CATALOG NUMBER: S125RDRP-H850D935-X4F0-XX-UDD-WVL-B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	68.7	4.9
10°-20°	185.9	13.3
20°-30°	257.0	18.3
30°-40°	273.8	19.5
40°-50°	240.5	17.2
50°-60°	182.3	13.0
60°-70°	118.4	8.5
70°-80°	58.7	4.2
80°-90°	15.3	1.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	511.7	36.5
0°-40°	785.4	56.1
0°-60°	1208.3	86.3
0°-90°	1400.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1400.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	739	739	739	739	739	
5°	736	735	725	727	726	70
15°	704	688	654	639	632	198
25°	633	598	549	521	507	291
35°	539	489	426	387	368	337
45°	431	371	299	246	224	332
55°	314	252	176	152	147	280
65°	185	137	104	96	94	182
75°	66	58	52	51	50	73
85°	11	13	14	14	14	14
90°	0	0	0	0	0	



TEST NUMBER: P1062223

CATALOG NUMBER: S125RDRP-H850D935-X4F0-XX-UDD-WVL-B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	739.4	739.4	739.4	739.4	739.4
2.5°	737.8	739.4	733.0	738.6	740.2
5°	736.2	734.6	724.9	727.3	726.5
7.5°	731.4	728.2	712.1	710.5	707.3
10°	724.9	716.9	694.4	688.8	684.0
12.5°	716.1	703.3	676.0	664.7	659.1
15°	704.1	688.0	654.3	639.0	631.8
17.5°	689.6	667.1	631.8	610.9	602.9
20°	672.8	646.3	605.3	581.2	571.6
22.5°	654.3	623.0	577.2	551.5	541.1
25°	632.6	598.1	549.1	521.0	507.4
27.5°	610.9	572.4	519.4	488.1	473.7
30°	589.3	545.1	487.3	453.6	438.3
32.5°	566.0	517.0	457.6	420.7	403.0
35°	538.7	488.9	425.5	387.0	367.7
37.5°	512.2	459.2	394.2	350.8	332.4
40°	487.3	431.1	362.9	315.5	296.2
42.5°	459.2	401.4	331.6	281.8	260.1
45°	431.1	370.9	299.4	245.7	224.0
47.5°	401.4	342.0	265.7	212.7	198.3
50°	374.9	312.3	236.0	187.9	178.2
52.5°	344.4	283.4	205.5	168.6	162.2
55°	313.9	252.1	175.8	151.7	146.9
57.5°	282.6	224.0	152.5	137.3	132.5
60°	249.7	195.1	134.1	122.0	119.6
62.5°	216.8	165.4	118.0	109.2	106.0
65°	184.6	137.3	103.6	95.5	93.9
67.5°	151.7	111.6	89.1	83.5	82.7
70°	121.2	90.7	75.5	72.3	70.6
72.5°	93.1	72.3	63.4	61.0	60.2
75°	65.8	57.8	52.2	50.6	49.8
77.5°	44.2	44.2	41.7	40.1	40.9
80°	30.5	32.1	31.3	31.3	31.3
82.5°	20.1	21.7	22.5	22.5	22.5
85°	11.2	12.8	13.6	13.6	14.5
87.5°	4.0	4.8	5.6	6.4	6.4
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1062223
 CATALOG NUMBER: S125RDRP-H850D935-X4F0-XX-UDD-WVL-B

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	16.21	17.70	16.57	18.01	18.33	12.45	13.94	12.82	14.26	14.57
	3H	17.52	18.86	17.90	19.18	19.55	14.03	15.37	14.41	15.70	16.06
	4H	17.89	19.14	18.29	19.49	19.87	14.64	15.89	15.04	16.24	16.62
	6H	18.06	19.22	18.48	19.59	19.98	15.11	16.26	15.52	16.63	17.02
	8H	18.10	19.20	18.53	19.59	19.99	15.27	16.37	15.69	16.76	17.16
	12H	18.11	19.17	18.54	19.55	19.98	15.38	16.43	15.81	16.81	17.24
4H	2H	16.32	17.57	16.72	17.92	18.30	13.11	14.36	13.51	14.71	15.09
	3H	17.81	18.84	18.22	19.25	19.65	14.89	15.93	15.30	16.33	16.73
	4H	18.28	19.22	18.72	19.63	20.07	15.61	16.54	16.04	16.96	17.40
	6H	18.57	19.38	19.03	19.82	20.28	16.20	17.01	16.66	17.45	17.91
	8H	18.64	19.39	19.10	19.84	20.31	16.40	17.16	16.87	17.61	18.07
	12H	18.68	19.35	19.16	19.83	20.30	16.56	17.24	17.04	17.71	18.19
8H	4H	18.36	19.12	18.83	19.57	20.03	15.92	16.68	16.39	17.12	17.59
	6H	18.73	19.35	19.23	19.85	20.32	16.63	17.25	17.13	17.74	18.22
	8H	18.85	19.41	19.36	19.92	20.40	16.91	17.47	17.42	17.98	18.47
	12H	18.93	19.43	19.44	19.92	20.49	17.14	17.63	17.65	18.12	18.69
12H	4H	18.36	19.03	18.84	19.51	19.99	15.95	16.62	16.43	17.10	17.57
	6H	18.73	19.29	19.25	19.80	20.29	16.68	17.24	17.19	17.75	18.24
	8H	18.89	19.39	19.40	19.88	20.45	17.02	17.51	17.53	18.00	18.57