

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1058481

Luminaire Tested: S122RDR-H675D927-X4F0-XX-UDD-WVL-W

Issue Date: 8/7/2025

Test Information

Test Method: LM-79-2019
Report Number: P1058481
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2406-143-55)
Test Lab: INNOVATION CENTER
Issue Date: 8/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S122RDR-H675D927-X4F0-XX-UDD-WVL-W
Description: DEFINE 2 WHITE REGRESSED DIRECT RECESSED HOUSING WITH WHITE STRAIGHT BLADE
LOUVER WITH DIFFUSER
HIGH PERFORMANCE LIGHT ENGINE
Light Source: 2700K CCT, 90 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1140.3 lumens
Efficiency: N/A
Efficacy: 48.5 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 1.05 / 1.05
Luminous Opening: Rectangular (W 0.15' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 23.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1058481

CATALOG NUMBER: S122RDR-H675D927-X4F0-XX-UDD-WVL-W

Luminous Intensity Polar Plot

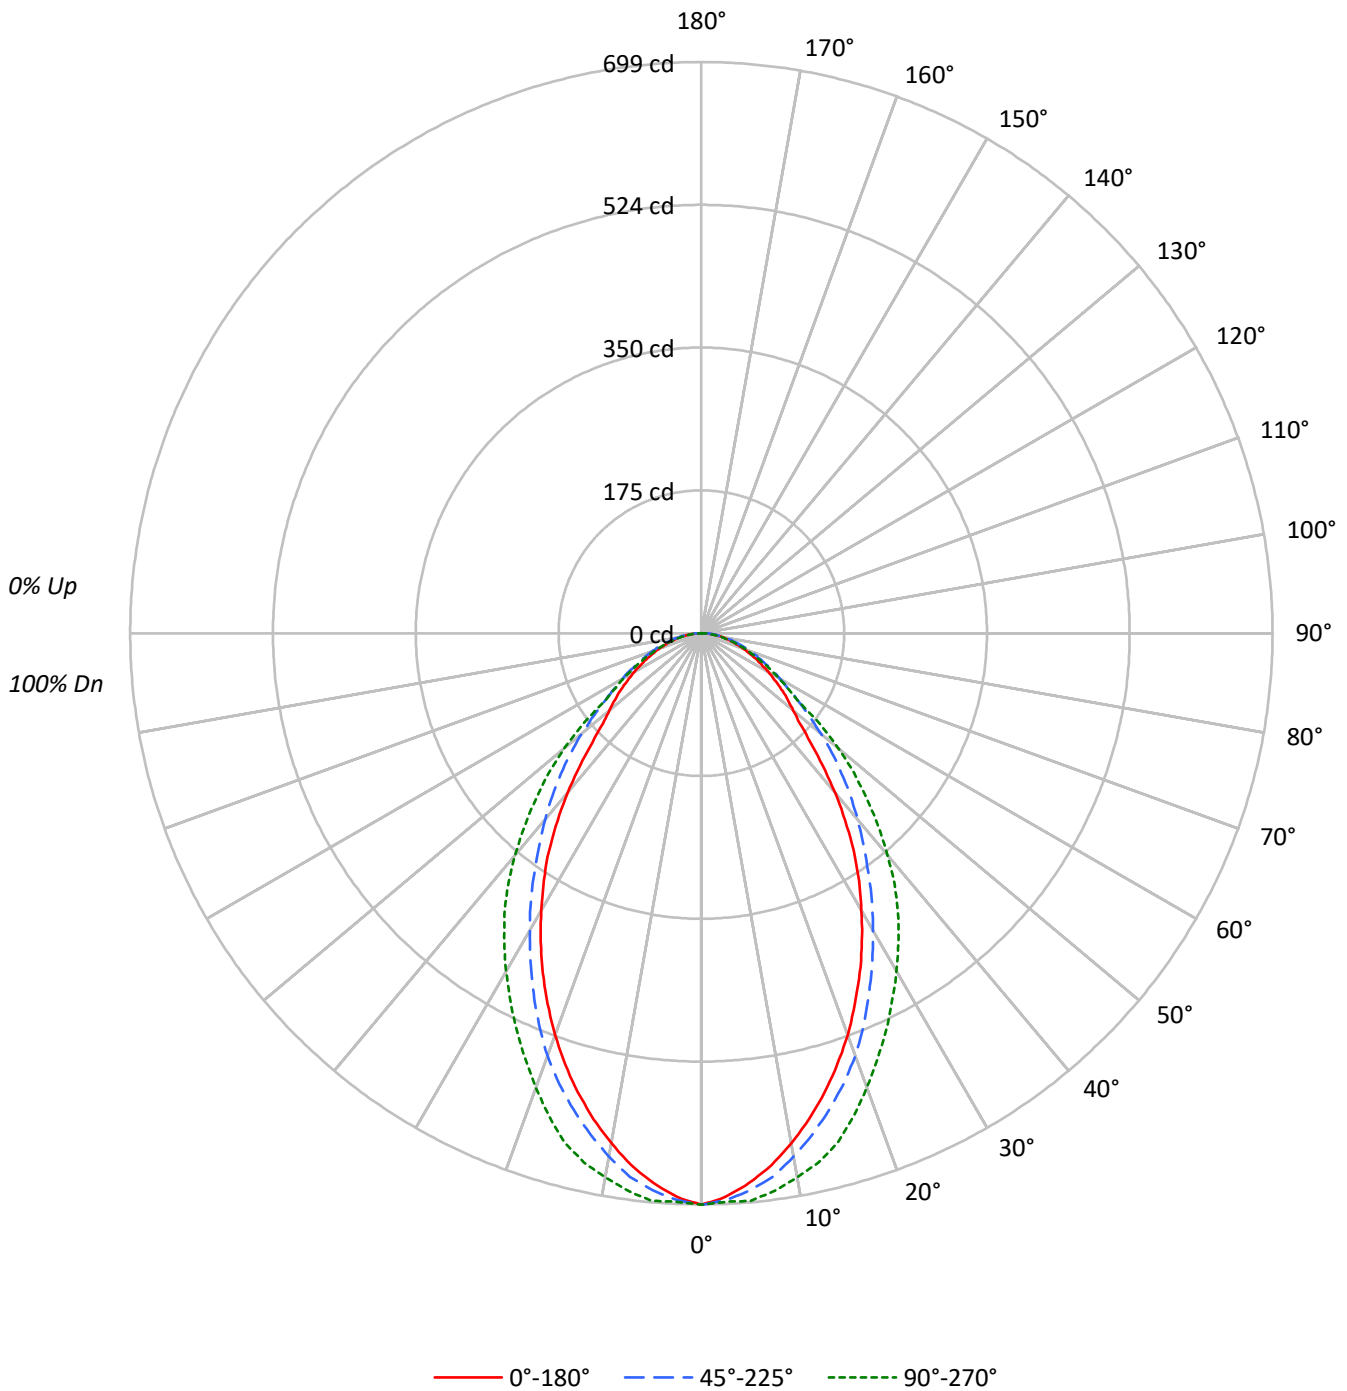



TEST NUMBER: P1058481

CATALOG NUMBER: S122RDR-H675D927-X4F0-XX-UDD-WVL-W

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	106	103	100	108	104	101	98	100	97	95	96	94	92	93	91	89	87
2	102	95	89	84	100	93	88	83	90	85	81	87	83	80	84	81	78	76
3	94	85	78	73	92	84	77	72	81	75	71	78	74	70	76	72	68	67
4	88	77	69	64	85	76	69	63	73	67	62	71	66	62	69	65	61	59
5	81	70	62	56	80	69	62	56	67	60	55	65	59	55	63	58	54	52
6	76	64	56	50	74	63	56	50	61	55	50	60	54	49	58	53	49	47
7	71	59	51	46	69	58	51	45	57	50	45	55	49	45	54	49	44	43
8	67	54	47	41	65	54	46	41	52	46	41	51	45	41	50	45	41	39
9	63	50	43	38	61	50	43	38	49	42	38	48	42	37	47	41	37	36
10	59	47	40	35	58	46	40	35	46	39	35	45	39	35	44	38	34	33

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	12906	12906	12906
5°	12510	12677	12914
10°	11879	12189	12668
15°	11120	11537	12327
20°	10278	10810	11623
25°	9341	9891	10903
30°	8348	8943	10176
35°	7319	8013	9454
40°	6123	7157	8532
45°	4906	6339	7458
50°	4211	5463	6261
55°	3848	4645	4620
60°	3499	4108	4026
65°	3187	3676	3515
70°	2919	3367	3124
75°	2738	3108	2738
80°	2561	2880	2402
85°	2541	3028	2075

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 45°
 Luminance: 7458 cd/sqm



TEST NUMBER: P1058481

CATALOG NUMBER: S122RDR-H675D927-X4F0-XX-UDD-WVL-W

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	64.6	5.7
10°-20°	170.9	15.0
20°-30°	225.5	19.8
30°-40°	227.0	19.9
40°-50°	184.8	16.2
50°-60°	126.0	11.0
60°-70°	81.8	7.2
70°-80°	45.0	3.9
80°-90°	14.7	1.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	461.0	40.4
0°-40°	688.0	60.3
0°-60°	998.8	87.6
0°-90°	1140.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1140.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	699	699	699	699	699	
5°	675	688	684	690	697	63
15°	582	597	604	629	645	163
25°	459	474	486	508	536	210
35°	325	341	356	387	420	202
45°	188	211	243	264	286	148
55°	120	132	144	145	144	107
65°	73	86	84	80	80	73
75°	38	47	44	39	38	41
85°	12	16	14	11	10	13
90°	0	0	0	0	0	



TEST NUMBER: P1058481

CATALOG NUMBER: S122RDR-H675D927-X4F0-XX-UDD-WVL-W

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	699.4	699.4	699.4	699.4	699.4
2.5°	690.4	701.7	694.2	694.9	696.4
5°	675.4	688.1	684.4	690.4	697.2
7.5°	656.6	669.3	670.9	679.9	688.1
10°	634.0	648.3	650.5	664.1	676.1
12.5°	609.2	625.0	628.0	647.5	663.3
15°	582.1	597.1	603.9	628.7	645.3
17.5°	553.5	567.8	578.3	600.9	619.7
20°	523.4	537.0	550.5	570.8	591.9
22.5°	491.1	506.1	518.9	539.2	563.3
25°	458.8	473.8	485.8	507.7	535.5
27.5°	425.7	440.7	452.7	476.1	506.1
30°	391.8	407.6	419.7	446.0	477.6
32.5°	358.7	374.5	388.1	415.9	449.0
35°	324.9	341.4	355.7	386.6	419.7
37.5°	288.8	307.6	325.6	356.5	388.8
40°	254.2	275.3	297.1	325.6	354.2
42.5°	219.6	242.9	270.0	294.1	320.4
45°	188.0	211.3	242.9	264.0	285.8
47.5°	163.2	182.8	216.6	233.9	253.4
50°	146.7	160.2	190.3	203.8	218.1
52.5°	133.1	144.4	165.5	174.5	182.0
55°	119.6	131.6	144.4	145.2	143.6
57.5°	106.0	119.6	126.3	121.1	124.1
60°	94.8	108.3	111.3	106.0	109.1
62.5°	82.7	97.8	97.8	92.5	94.0
65°	73.0	86.5	84.2	79.7	80.5
67.5°	63.2	76.7	73.0	68.4	68.4
70°	54.1	66.9	62.4	57.9	57.9
72.5°	45.9	56.4	53.4	48.1	47.4
75°	38.4	47.4	43.6	39.1	38.4
77.5°	30.8	38.4	35.3	31.6	30.1
80°	24.1	30.8	27.1	24.1	22.6
82.5°	18.0	23.3	20.3	17.3	15.8
85°	12.0	15.8	14.3	11.3	9.8
87.5°	6.0	10.5	9.0	7.5	6.0
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1058481
 CATALOG NUMBER: S122RDR-H675D927-X4F0-XX-UDD-WVL-W

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.61	17.04	15.97	17.36	17.67	15.85	17.29	16.22	17.60	17.92
	3H	17.13	18.42	17.51	18.75	19.11	17.21	18.50	17.59	18.83	19.19
	4H	17.70	18.90	18.10	19.25	19.63	17.69	18.90	18.09	19.25	19.63
	6H	18.12	19.23	18.53	19.60	19.99	18.04	19.15	18.45	19.52	19.91
	8H	18.27	19.33	18.70	19.72	20.12	18.15	19.21	18.58	19.60	20.00
	12H	18.38	19.40	18.82	19.78	20.21	18.22	19.23	18.65	19.61	20.04
4H	2H	16.18	17.38	16.58	17.73	18.11	16.38	17.58	16.78	17.93	18.31
	3H	17.98	18.98	18.39	19.38	19.78	17.95	18.95	18.36	19.35	19.75
	4H	18.72	19.62	19.16	20.04	20.48	18.54	19.44	18.98	19.86	20.30
	6H	19.31	20.09	19.77	20.53	21.00	19.01	19.79	19.47	20.24	20.70
	8H	19.52	20.25	19.98	20.69	21.16	19.16	19.89	19.63	20.34	20.81
	12H	19.68	20.33	20.17	20.81	21.29	19.27	19.92	19.76	20.40	20.88
8H	4H	18.99	19.72	19.45	20.16	20.63	18.83	19.56	19.30	20.01	20.48
	6H	19.74	20.34	20.24	20.84	21.32	19.43	20.03	19.92	20.52	21.00
	8H	20.07	20.61	20.58	21.12	21.61	19.65	20.19	20.16	20.70	21.19
	12H	20.35	20.83	20.86	21.32	21.89	19.83	20.31	20.34	20.80	21.37
12H	4H	19.00	19.65	19.49	20.13	20.60	18.87	19.52	19.35	20.00	20.47
	6H	19.79	20.33	20.31	20.84	21.33	19.49	20.03	20.01	20.55	21.04
	8H	20.19	20.66	20.70	21.16	21.72	19.78	20.26	20.29	20.75	21.32