

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1060786

Luminaire Tested: S124RDR-H350D830-X4F0-XX-UDD-BVL-B

Issue Date: 8/7/2025

Test Information

Test Method: LM-79-2019
Report Number: P1060786
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2406-143-39)
Test Lab: INNOVATION CENTER
Issue Date: 8/7/2025
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S124RDR-H350D830-X4F0-XX-UDD-BVL-B
Description: DEFINE 4 BLACK REGRESSED DIRECT RECESSED HOUSING WITH BLACK STRAIGHT BLADE
LOUVER WITH DIFFUSER
HIGH PERFORMANCE LIGHT ENGINE
Light Source: 3000K CCT, 80 CRI LEDS
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 347.7 lumens
Efficiency: N/A
Efficacy: 29.7 lumens/watt
Spacing Criteria (0/90/45): 1.15 / 0.83 / 0.98
Luminous Opening: Rectangular (W 0.31' x L: 4' x H: 0')
CIE Type: Direct

Input Watts (W): 11.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1060786

CATALOG NUMBER: S124RDR-H350D830-X4F0-XX-UDD-BVL-B

Luminous Intensity Polar Plot

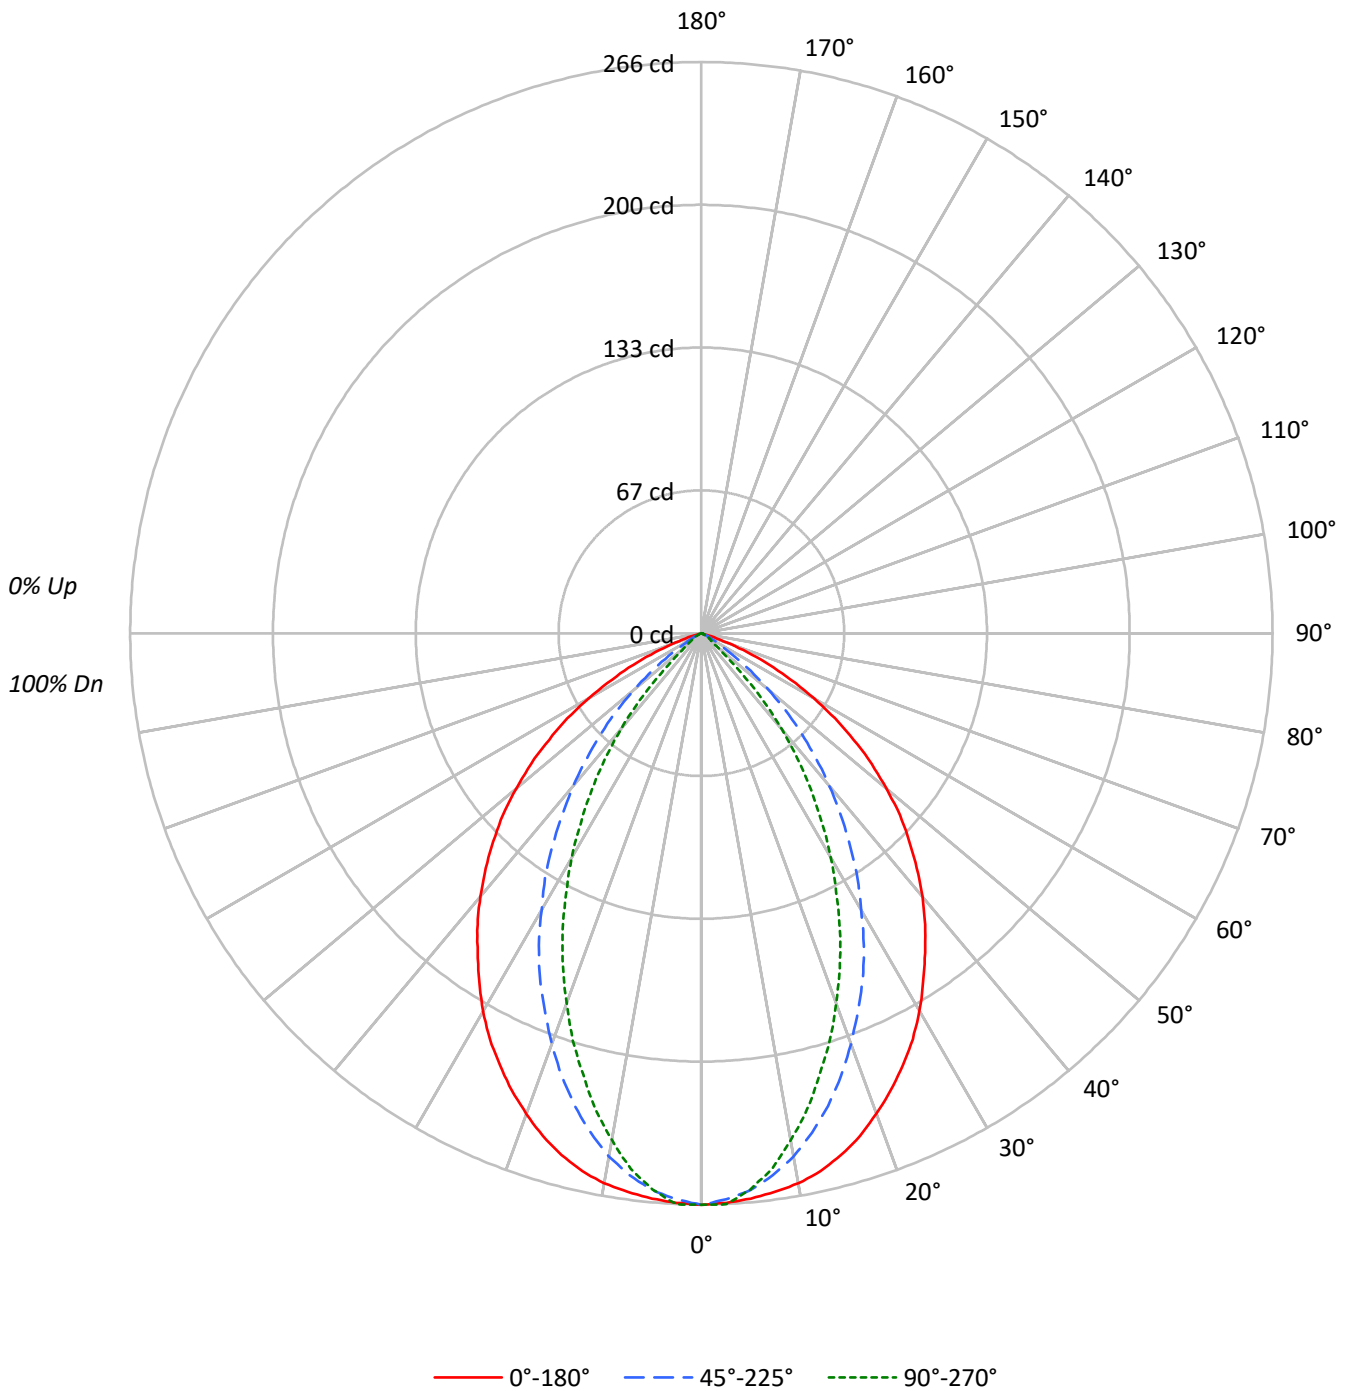



TEST NUMBER: P1060786

CATALOG NUMBER: S124RDR-H350D830-X4F0-XX-UDD-BVL-B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	96	94	93	91
2	105	99	95	90	103	98	93	89	94	91	87	91	88	86	88	86	84	82
3	98	91	85	80	96	89	84	79	86	82	78	84	80	77	82	78	75	74
4	92	83	76	71	90	82	76	71	79	74	70	77	73	69	75	71	68	66
5	86	76	69	64	84	75	69	64	73	67	63	71	66	62	70	65	62	60
6	81	70	63	58	79	69	63	58	68	62	57	66	61	57	65	60	56	55
7	76	65	58	53	74	64	57	53	63	57	52	61	56	52	60	55	52	50
8	71	60	53	48	70	60	53	48	58	52	48	57	52	48	56	51	47	46
9	67	56	49	44	66	56	49	44	54	48	44	54	48	44	53	48	44	42
10	64	52	46	41	63	52	45	41	51	45	41	50	45	41	49	44	41	39

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2292	2292	2292
5°	2285	2252	2248
10°	2274	2163	2096
15°	2243	2031	1897
20°	2183	1865	1682
25°	2109	1689	1451
30°	2020	1481	1201
35°	1909	1270	935
40°	1800	1042	653
45°	1668	801	323
50°	1504	541	109
55°	1300	278	75
60°	1040	100	53
65°	713	55	24
70°	320	30	20
75°	0	13	13
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1668 cd/sqm



TEST NUMBER: P1060786

CATALOG NUMBER: S124RDR-H350D830-X4F0-XX-UDD-BVL-B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	24.6	7.1
10°-20°	64.4	18.5
20°-30°	83.4	24.0
30°-40°	79.3	22.8
40°-50°	56.1	16.1
50°-60°	28.8	8.3
60°-70°	10.1	2.9
70°-80°	0.9	0.3
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	172.5	49.6
0°-40°	251.8	72.4
0°-60°	336.7	96.8
0°-90°	347.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	347.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	266	266	266	266	266	
5°	264	265	260	260	260	25
15°	252	244	228	217	213	71
25°	222	205	178	159	153	102
35°	182	155	121	97	89	114
45°	137	105	66	38	26	105
55°	87	57	18	5	5	77
65°	35	17	3	2	1	35
75°	0	0	0	0	0	3
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P1060786

CATALOG NUMBER: S124RDR-H350D830-X4F0-XX-UDD-BVL-B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	266.2	266.2	266.2	266.2	266.2
2.5°	265.5	266.2	263.9	265.9	266.2
5°	264.3	264.7	260.5	260.5	260.1
7.5°	262.4	261.6	254.7	252.0	251.6
10°	260.1	257.4	247.4	241.6	239.7
12.5°	256.6	251.6	238.2	229.7	227.4
15°	251.6	243.9	227.8	217.0	212.8
17.5°	245.5	235.5	216.2	203.2	198.9
20°	238.2	225.5	203.5	188.9	183.5
22.5°	230.5	215.8	190.5	173.9	168.5
25°	222.0	204.7	177.8	158.9	152.7
27.5°	213.2	192.8	163.9	144.3	136.2
30°	203.2	180.8	148.9	128.5	120.8
32.5°	192.4	167.8	135.4	113.5	104.3
35°	181.6	155.1	120.8	97.3	88.9
37.5°	171.2	143.1	106.2	81.6	73.5
40°	160.1	130.0	92.7	67.3	58.1
42.5°	148.5	117.3	78.9	52.7	42.7
45°	137.0	105.4	65.8	37.7	26.5
47.5°	125.4	92.7	53.1	23.9	14.2
50°	112.3	80.4	40.4	12.7	8.1
52.5°	100.0	68.9	28.9	7.3	6.2
55°	86.6	56.9	18.5	5.4	5.0
57.5°	73.9	45.4	10.4	4.2	3.8
60°	60.4	35.0	5.8	3.5	3.1
62.5°	46.9	25.4	3.8	2.3	1.9
65°	35.0	16.9	2.7	1.5	1.2
67.5°	23.1	9.6	1.9	0.8	0.8
70°	12.7	4.6	1.2	0.8	0.8
72.5°	4.6	1.5	0.8	0.4	0.4
75°	0.0	0.4	0.4	0.4	0.4
77.5°	0.0	0.0	0.0	0.0	0.4
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P1060786
 CATALOG NUMBER: S124RDR-H350D830-X4F0-XX-UDD-BVL-B

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.41	12.67	11.78	12.98	13.30	0.00	0.00	0.00	0.00	0.00
	3H	11.69	12.79	12.07	13.12	13.49	0.00	0.00	0.00	0.00	0.00
	4H	11.61	12.64	12.02	12.99	13.37	0.00	0.00	0.00	0.00	0.00
	6H	11.53	12.46	11.94	12.84	13.23	0.00	0.00	0.00	0.00	0.00
	8H	11.48	12.37	11.91	12.76	13.16	0.00	0.00	0.00	0.00	0.00
	12H	11.43	12.28	11.87	12.66	13.09	0.00	0.00	0.00	0.00	0.00
4H	2H	11.19	12.21	11.59	12.56	12.95	0.00	0.00	0.00	0.00	0.00
	3H	11.47	12.30	11.88	12.70	13.11	0.00	0.00	0.00	0.00	0.00
	4H	11.38	12.11	11.81	12.53	12.98	0.00	0.00	0.00	0.00	0.00
	6H	11.29	11.92	11.75	12.37	12.84	0.00	0.00	0.00	0.00	0.00
	8H	11.23	11.81	11.70	12.26	12.74	0.00	0.00	0.00	0.00	0.00
	12H	11.18	11.69	11.66	12.18	12.65	0.00	0.00	0.00	0.00	0.00
8H	4H	11.23	11.82	11.70	12.26	12.74	0.00	0.00	0.00	0.00	0.00
	6H	11.12	11.60	11.62	12.09	12.58	0.00	0.00	0.00	0.00	0.00
	8H	11.05	11.48	11.58	12.00	12.49	0.00	0.00	0.00	0.00	0.00
	12H	11.00	11.38	11.52	11.88	12.45	0.00	0.00	0.00	0.00	0.00
12H	4H	11.18	11.69	11.66	12.18	12.65	0.00	0.00	0.00	0.00	0.00
	6H	11.05	11.48	11.58	12.00	12.49	0.00	0.00	0.00	0.00	0.00
	8H	11.00	11.38	11.52	11.88	12.45	0.00	0.00	0.00	0.00	0.00