

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P1056570

Luminaire Tested: S125R3DR-H375D940-X4F0-XX-UDD-FLL-W

Issue Date: 7/25/2025

**Test Information**

Test Method: LM-79-2019  
Report Number: P1056570  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2503-402-10)  
Test Lab: INNOVATION CENTER  
Issue Date: 7/25/2025  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S125R3DR-H375D940-X4F0-XX-UDD-FLL-W  
Description: DEFINE 5, WHITE 3-INCH REGRESSED DIRECT RECESSED HOUSING WITH FROSTED LENS  
HIGH PERFORMANCE LIGHT ENGINE  
Light Source: 4000K CCT, 90 CRI LEDS  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1102.1 lumens  
Efficiency: N/A  
Efficacy: 94.2 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.01 / 1.17  
Luminous Opening: Rectangular (W 0.39' x L: 3.9' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 11.7  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1056570

CATALOG NUMBER: S125R3DR-H375D940-X4F0-XX-UDD-FLL-W

### Luminous Intensity Polar Plot

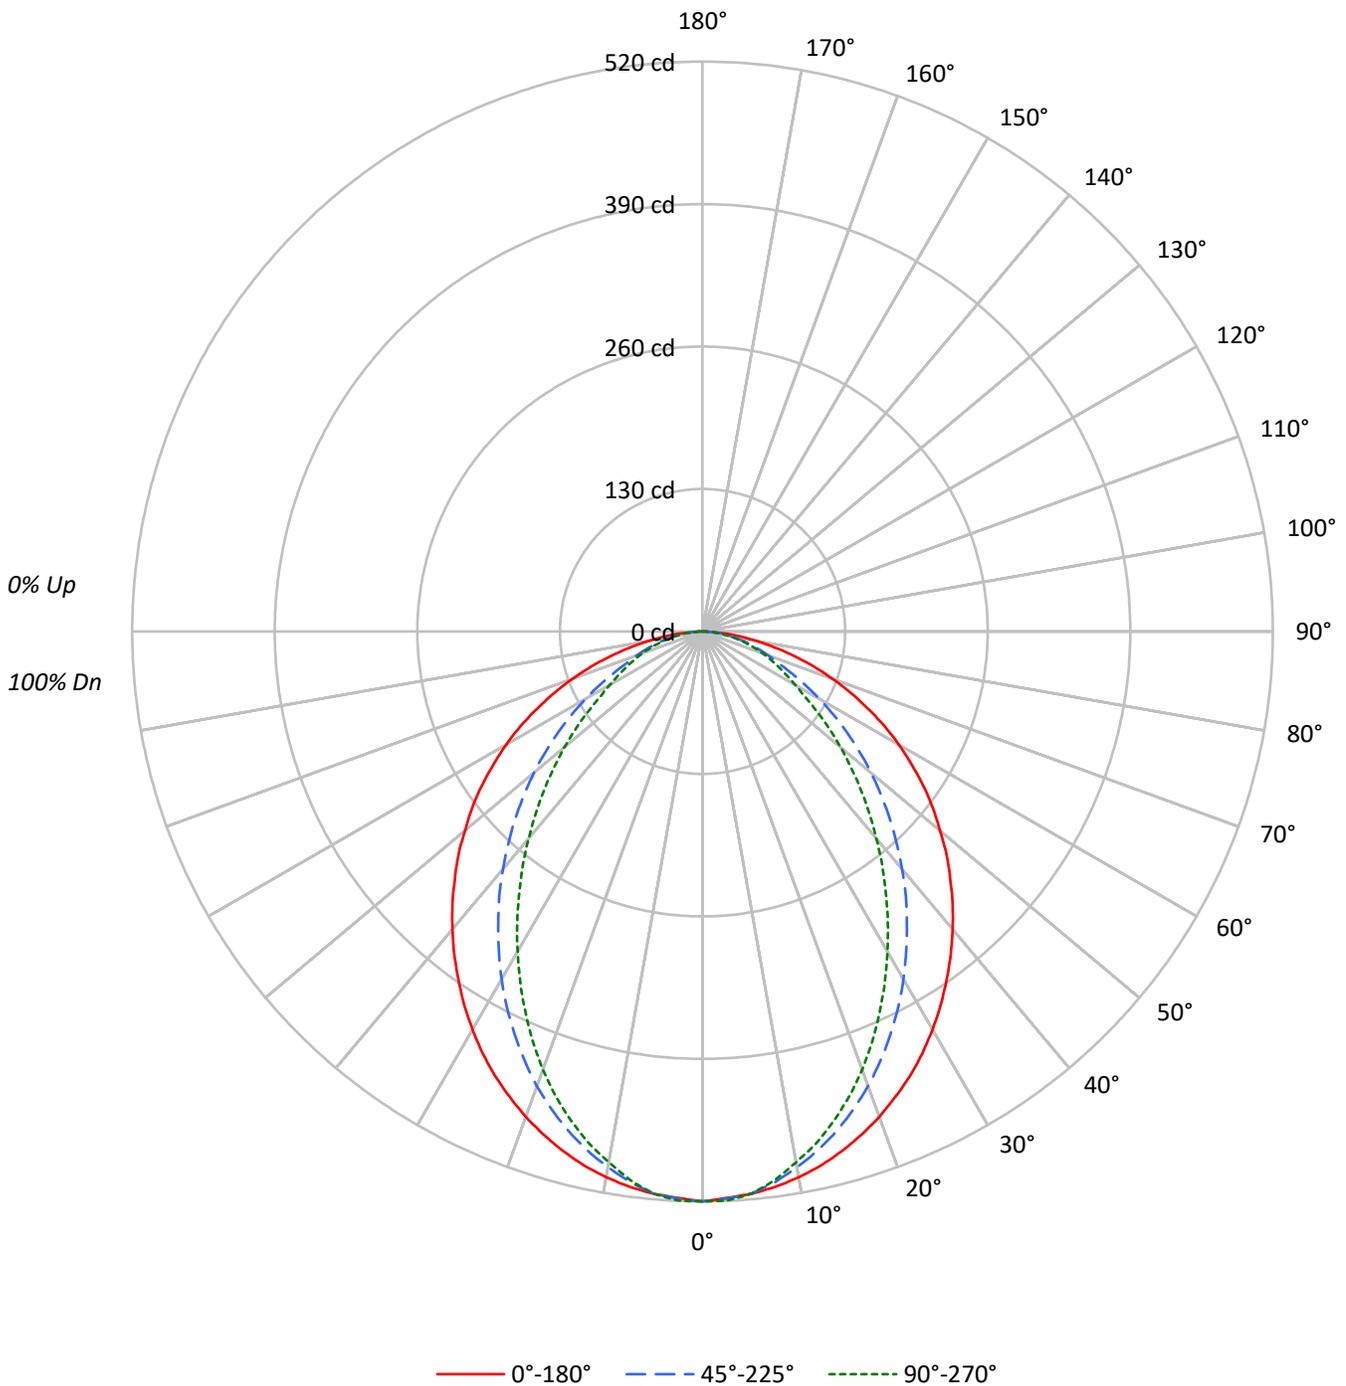



TEST NUMBER: P1056570

CATALOG NUMBER: S125R3DR-H375D940-X4F0-XX-UDD-FLL-W

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	105	101	98	107	103	100	96	99	96	93	95	93	90	91	90	88	86
2	101	93	87	81	98	91	85	80	88	83	79	84	80	77	81	78	75	73
3	92	83	75	69	90	81	74	68	78	72	67	75	70	66	73	69	65	63
4	85	74	66	59	83	73	65	59	70	63	58	68	62	57	66	61	57	55
5	79	67	58	52	77	66	58	52	63	56	51	62	55	51	60	54	50	48
6	73	60	52	46	71	59	51	46	58	51	45	56	50	45	55	49	45	43
7	68	55	47	41	66	54	46	41	53	46	41	51	45	40	50	44	40	38
8	63	51	42	37	62	50	42	37	49	42	37	47	41	36	46	40	36	34
9	59	47	39	33	58	46	39	33	45	38	33	44	38	33	43	37	33	31
10	56	43	36	31	55	43	35	30	42	35	30	41	35	30	40	34	30	28

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3676	3676	3676
5°	3654	3652	3654
10°	3629	3563	3530
15°	3593	3454	3383
20°	3545	3321	3201
25°	3491	3162	2984
30°	3423	2990	2753
35°	3348	2803	2513
40°	3273	2612	2276
45°	3193	2411	2040
50°	3108	2206	1806
55°	3031	1981	1570
60°	2924	1740	1380
65°	2778	1477	1283
70°	2608	1321	1201
75°	2357	1215	1131
80°	2048	1103	1054
85°	1598	973	973

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 3193 cd/sqm

TEST NUMBER: P1056570

CATALOG NUMBER: S125R3DR-H375D940-X4F0-XX-UDD-FLL-W

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	48.7	4.4
10°-20°	133.6	12.1
20°-30°	188.7	17.1
30°-40°	207.7	18.8
40°-50°	193.8	17.6
50°-60°	154.7	14.0
60°-70°	104.1	9.4
70°-80°	55.4	5.0
80°-90°	15.4	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	370.9	33.7
0°-40°	578.7	52.5
0°-60°	927.1	84.1
0°-90°	1102.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1102.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	520	520	520	520	520	
5°	515	519	515	513	515	49
15°	491	488	472	464	462	138
25°	448	434	405	388	382	206
35°	388	365	325	299	291	243
45°	319	289	241	212	204	247
55°	246	209	161	135	127	219
65°	166	130	88	78	77	165
75°	86	57	44	42	41	92
85°	20	14	12	12	12	24
90°	0	0	0	0	0	



TEST NUMBER: P1056570

CATALOG NUMBER: S125R3DR-H375D940-X4F0-XX-UDD-FLL-W

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	520.0	520.0	520.0	520.0	520.0
2.5°	517.3	521.5	518.0	518.8	519.6
5°	514.9	519.2	514.6	513.0	514.9
7.5°	511.1	514.6	506.8	503.3	504.9
10°	505.6	508.0	496.4	491.7	491.7
12.5°	499.1	499.1	485.1	478.5	478.5
15°	490.9	488.2	472.0	463.8	462.3
17.5°	481.6	476.6	457.3	446.8	444.9
20°	471.2	463.1	441.4	427.8	425.5
22.5°	459.6	449.1	424.0	407.3	404.6
25°	447.6	434.0	405.4	387.6	382.5
27.5°	434.0	417.8	386.4	366.3	360.1
30°	419.3	400.7	366.3	343.8	337.2
32.5°	404.2	383.3	345.7	321.7	314.4
35°	387.9	365.1	324.8	299.3	291.2
37.5°	371.7	346.9	304.3	277.6	269.1
40°	354.7	327.5	283.0	255.5	246.6
42.5°	337.6	308.6	262.1	234.2	224.9
45°	319.4	289.2	241.2	211.8	204.0
47.5°	302.0	269.5	220.7	192.0	183.5
50°	282.6	249.0	200.6	171.9	164.2
52.5°	264.8	228.8	180.4	153.7	145.6
55°	245.9	208.7	160.7	135.1	127.4
57.5°	226.1	188.6	141.7	117.7	110.3
60°	206.8	168.4	123.1	101.1	97.6
62.5°	187.0	149.4	105.7	88.7	86.3
65°	166.1	129.7	88.3	78.2	76.7
67.5°	146.4	110.7	74.3	68.5	67.0
70°	126.2	91.8	63.9	58.9	58.1
72.5°	106.5	73.6	53.8	50.3	49.6
75°	86.3	57.3	44.5	41.8	41.4
77.5°	67.8	43.0	35.2	34.1	33.3
80°	50.3	32.1	27.1	26.3	25.9
82.5°	34.5	22.1	19.4	19.4	18.6
85°	19.7	13.6	12.0	12.4	12.0
87.5°	7.4	5.8	5.4	5.8	5.8
90°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1056570  
 CATALOG NUMBER: S125R3DR-H375D940-X4F0-XX-UDD-FLL-W

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.81	17.35	16.18	17.67	17.98	12.19	13.73	12.56	14.05	14.36
	3H	17.60	18.98	17.98	19.31	19.67	13.67	15.05	14.05	15.38	15.74
	4H	18.25	19.55	18.65	19.90	20.28	14.26	15.56	14.66	15.91	16.29
	6H	18.73	19.93	19.14	20.29	20.69	14.72	15.92	15.13	16.29	16.68
	8H	18.88	20.03	19.31	20.41	20.82	14.88	16.03	15.31	16.42	16.82
	12H	18.98	20.07	19.41	20.45	20.88	15.00	16.09	15.43	16.47	16.90
4H	2H	15.95	17.25	16.35	17.59	17.97	12.87	14.17	13.27	14.52	14.90
	3H	17.92	19.00	18.33	19.40	19.80	14.55	15.63	14.96	16.03	16.43
	4H	18.66	19.64	19.09	20.05	20.49	15.25	16.22	15.68	16.64	17.08
	6H	19.26	20.10	19.71	20.55	21.01	15.84	16.68	16.29	17.13	17.59
	8H	19.46	20.26	19.93	20.70	21.17	16.04	16.84	16.51	17.28	17.75
	12H	19.61	20.32	20.09	20.80	21.27	16.21	16.91	16.69	17.39	17.86
8H	4H	18.73	19.52	19.19	19.96	20.43	15.61	16.41	16.08	16.85	17.32
	6H	19.38	20.04	19.88	20.53	21.01	16.32	16.97	16.81	17.46	17.94
	8H	19.64	20.23	20.15	20.74	21.22	16.60	17.19	17.11	17.70	18.19
	12H	19.85	20.37	20.36	20.86	21.42	16.84	17.36	17.35	17.86	18.42
12H	4H	18.72	19.43	19.20	19.91	20.38	15.66	16.37	16.14	16.85	17.32
	6H	19.38	19.97	19.89	20.48	20.97	16.39	16.98	16.90	17.49	17.97
	8H	19.67	20.19	20.18	20.69	21.25	16.73	17.25	17.24	17.74	18.31