

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P929930

Luminaire Tested: DFN2DS-4P3F0-060DS950-RLL

Issue Date: 11/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P929930
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P333882)
Test Lab: INNOVATION CENTER
Issue Date: 11/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DS-4P3F0-060DS950-RLL
Description: 3 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4819.5 lumens
Efficiency: N/A
Efficacy: 74.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 3.07' x L: 3.07' x H: 0')
CIE Type: Direct

Input Watts (W): 65
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9963
Total Harmonic Distortion (THDi): 0.065
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P929930

CATALOG NUMBER: DFN2DS-4P3F0-060DS950-RLL

Luminous Intensity Polar Plot

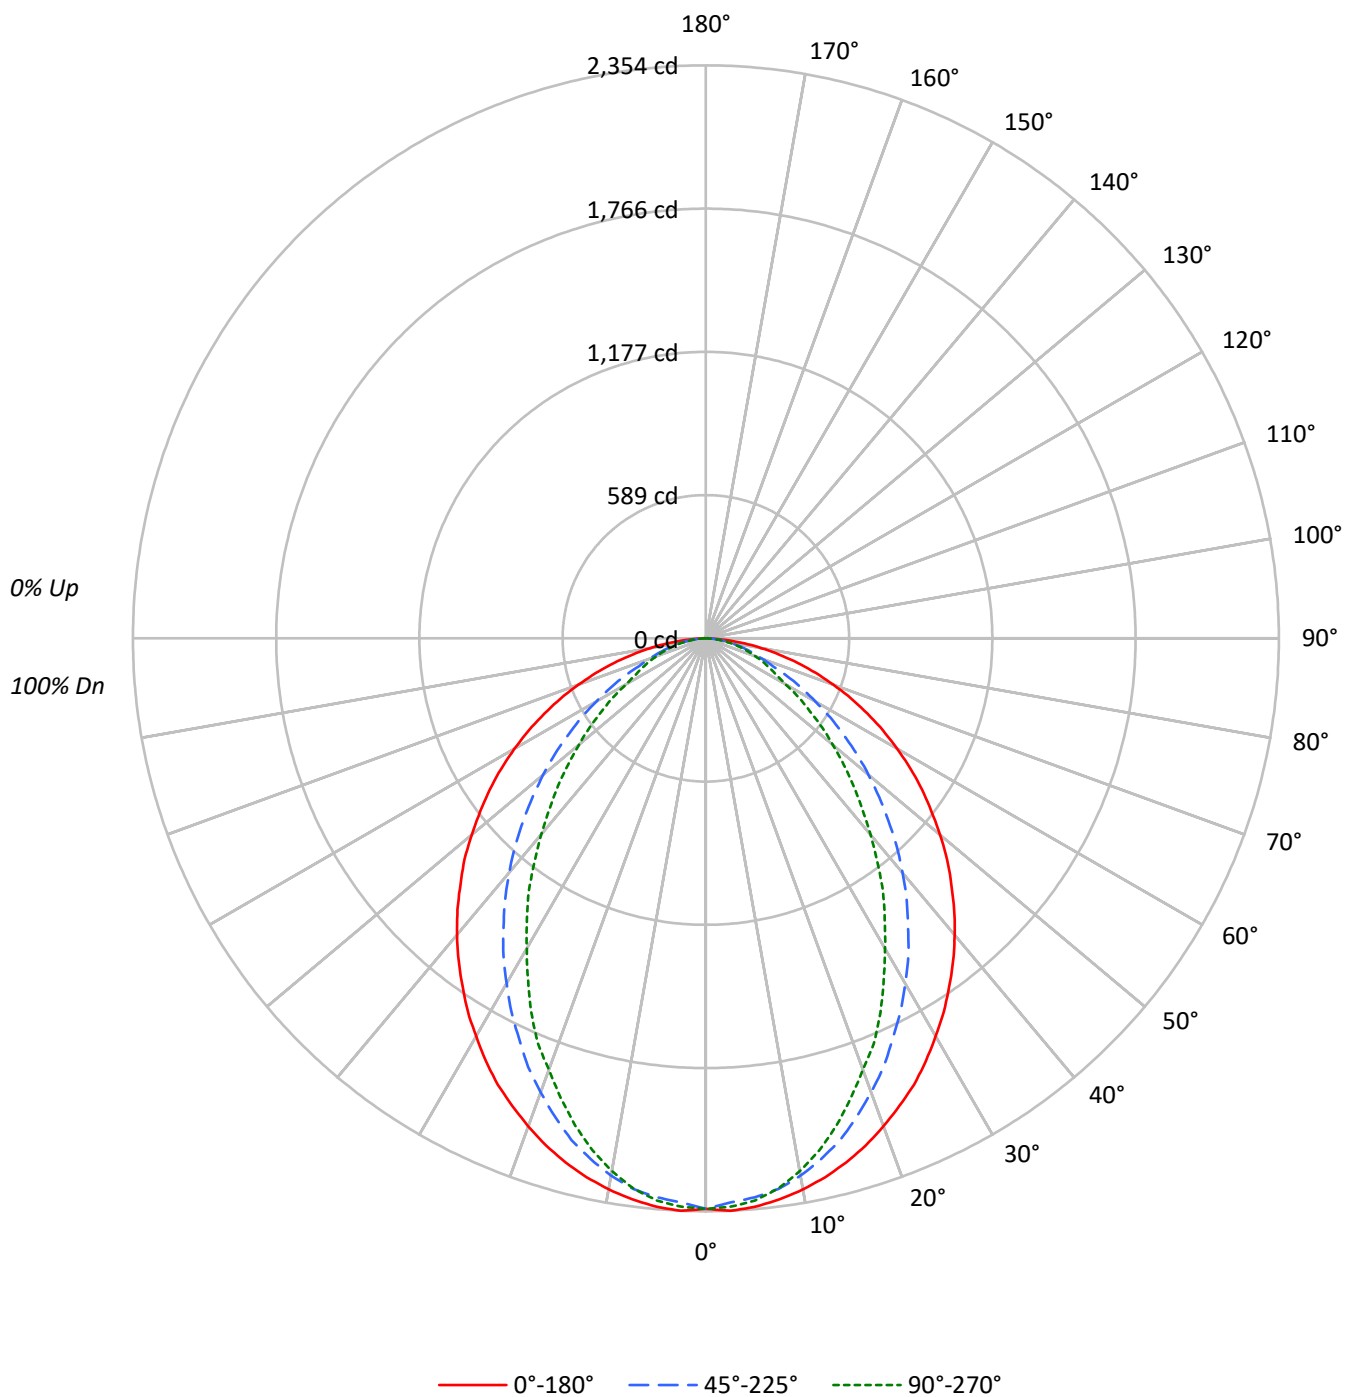

TEST NUMBER: P929930

CATALOG NUMBER: DFN2DS-4P3F0-060DS950-RLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	110	106	102	98	107	103	100	97	99	96	94		95	93	91		92
2	101	94	87	82	98	92	86	81	88	83	79		85	81	78		82
3	93	83	76	70	90	82	75	69	79	73	68		76	71	67		74
4	86	75	66	60	83	73	66	60	71	64	59		69	63	58		66
5	79	67	59	53	77	66	58	52	64	57	52		62	56	51		60
6	74	61	53	47	72	60	52	46	58	51	46		57	50	46		55
7	68	56	47	42	67	55	47	42	53	46	41		52	46	41		51
8	64	51	43	38	62	51	43	37	49	42	37		48	42	37		47
9	60	47	39	34	59	47	39	34	46	39	34		44	38	34		44
10	56	44	36	31	55	43	36	31	42	36	31		41	35	31		41

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2671	2671	2671
5°	2681	2637	2652
10°	2660	2594	2572
15°	2630	2517	2445
20°	2587	2407	2286
25°	2544	2283	2133
30°	2484	2154	1937
35°	2425	2015	1764
40°	2366	1871	1565
45°	2297	1709	1384
50°	2226	1545	1207
55°	2153	1369	1037
60°	2069	1184	860
65°	1973	995	783
70°	1858	819	720
75°	1718	747	673
80°	1517	667	613
85°	1191	527	527

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2297 cd/sqm

TEST NUMBER: P929930

CATALOG NUMBER: DFN2DS-4P3F0-060DS950-RLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	219.6	4.6
10°-20°	602.9	12.5
20°-30°	846.5	17.6
30°-40°	922.7	19.1
40°-50°	848.1	17.6
50°-60°	666.0	13.8
60°-70°	433.5	9.0
70°-80°	223.2	4.6
80°-90°	57.0	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1669.0	34.6
0°-40°	2591.7	53.8
0°-60°	4105.8	85.2
0°-90°	4819.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4819.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2343	2343	2343	2343	2343	
5°	2343	2333	2305	2324	2318	222
15°	2229	2205	2133	2093	2072	628
25°	2023	1955	1815	1728	1697	930
35°	1743	1635	1449	1315	1268	1091
45°	1425	1283	1060	910	859	1101
55°	1084	918	689	562	522	968
65°	732	560	369	297	290	725
75°	390	242	170	155	153	413
85°	91	47	40	40	40	109
90°	0	0	0	0	0	

TEST NUMBER: P929930

CATALOG NUMBER: DFN2DS-4P3F0-060DS950-RLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2343.4	2343.4	2343.4	2343.4	2343.4
2.5°	2354.0	2343.4	2320.0	2341.3	2337.1
5°	2343.4	2332.8	2305.1	2324.3	2318.0
7.5°	2324.3	2311.7	2282.0	2290.3	2279.7
10°	2298.8	2284.0	2241.7	2235.2	2222.5
12.5°	2267.1	2248.0	2190.6	2178.0	2154.6
15°	2228.9	2205.4	2133.4	2093.2	2072.0
17.5°	2184.4	2150.3	2061.2	2014.6	1980.7
20°	2133.4	2090.9	1985.0	1932.1	1885.3
22.5°	2078.3	2029.5	1906.4	1834.4	1802.7
25°	2023.2	1955.3	1815.3	1728.5	1696.6
27.5°	1957.6	1885.3	1730.5	1630.8	1582.0
30°	1887.5	1806.7	1637.1	1529.1	1471.7
32.5°	1819.6	1722.0	1548.3	1420.9	1367.8
35°	1743.3	1635.1	1448.6	1314.9	1268.1
37.5°	1669.1	1552.3	1355.2	1208.7	1155.8
40°	1590.5	1463.4	1257.5	1107.0	1051.9
42.5°	1510.0	1374.3	1160.1	1003.0	950.2
45°	1425.2	1282.9	1060.5	909.7	858.8
47.5°	1344.6	1194.1	965.0	814.3	767.7
50°	1255.5	1105.0	871.7	725.2	680.9
52.5°	1168.4	1009.4	782.6	642.6	602.3
55°	1083.6	918.3	689.2	562.1	521.7
57.5°	996.8	827.1	606.6	487.8	453.8
60°	907.7	738.0	519.6	411.5	377.5
62.5°	820.8	651.2	445.3	343.6	326.7
65°	731.7	559.8	369.0	297.0	290.5
67.5°	646.9	475.0	297.0	260.8	254.5
70°	557.7	392.4	245.9	224.8	216.2
72.5°	473.0	315.9	205.6	188.8	184.5
75°	390.2	241.6	169.6	154.8	152.8
77.5°	307.6	171.7	133.6	125.1	120.9
80°	231.1	123.0	101.7	93.4	93.4
82.5°	161.1	82.8	69.9	65.7	65.7
85°	91.1	46.6	40.3	40.3	40.3
87.5°	34.0	16.9	16.9	14.8	14.8
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P929930

CATALOG NUMBER: DFN2DS-4P3F0-060DS950-RLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.65	16.17	15.01	16.48	16.80	10.61	12.13	10.97	12.44	12.76
	3H	16.41	17.78	16.79	18.11	18.47	11.87	13.24	12.25	13.57	13.93
	4H	17.08	18.36	17.48	18.71	19.09	12.37	13.66	12.77	14.00	14.38
	6H	17.57	18.75	17.98	19.12	19.51	12.76	13.94	13.17	14.31	14.70
	8H	17.73	18.86	18.16	19.25	19.65	12.88	14.01	13.31	14.40	14.80
	12H	17.84	18.91	18.27	19.30	19.73	12.96	14.04	13.39	14.42	14.85
4H	2H	14.75	16.03	15.15	16.38	16.76	11.30	12.58	11.70	12.93	13.31
	3H	16.68	17.75	17.10	18.15	18.55	12.75	13.81	13.16	14.21	14.61
	4H	17.43	18.39	17.87	18.81	19.24	13.35	14.30	13.78	14.72	15.16
	6H	18.03	18.86	18.48	19.30	19.76	13.83	14.67	14.29	15.11	15.57
	8H	18.24	19.02	18.70	19.46	19.93	14.00	14.77	14.46	15.22	15.69
	12H	18.39	19.09	18.88	19.57	20.04	14.11	14.81	14.60	15.29	15.76
8H	4H	17.46	18.24	17.92	18.68	19.15	13.70	14.48	14.16	14.92	15.39
	6H	18.10	18.74	18.59	19.23	19.71	14.29	14.93	14.78	15.42	15.90
	8H	18.35	18.92	18.86	19.43	19.92	14.51	15.08	15.02	15.59	16.08
	12H	18.55	19.06	19.06	19.55	20.12	14.69	15.20	15.20	15.69	16.25
12H	4H	17.44	18.14	17.92	18.62	19.09	13.74	14.44	14.23	14.92	15.39
	6H	18.08	18.65	18.59	19.16	19.65	14.35	14.93	14.86	15.44	15.93
	8H	18.36	18.87	18.87	19.36	19.93	14.62	15.13	15.13	15.63	16.19