

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P929988

Luminaire Tested: DFN2DS-4P4F0-060DS835-RLL

Issue Date: 11/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P929988
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P333882)
Test Lab: INNOVATION CENTER
Issue Date: 11/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DS-4P4F0-060DS835-RLL
Description: 4 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5100.0 lumens
Efficiency: N/A
Efficacy: 82.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 4.07' x L: 4.07' x H: 0')
CIE Type: Direct

Input Watts (W): 62
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P929988

CATALOG NUMBER: DFN2DS-4P4F0-060DS835-RLL

Luminous Intensity Polar Plot

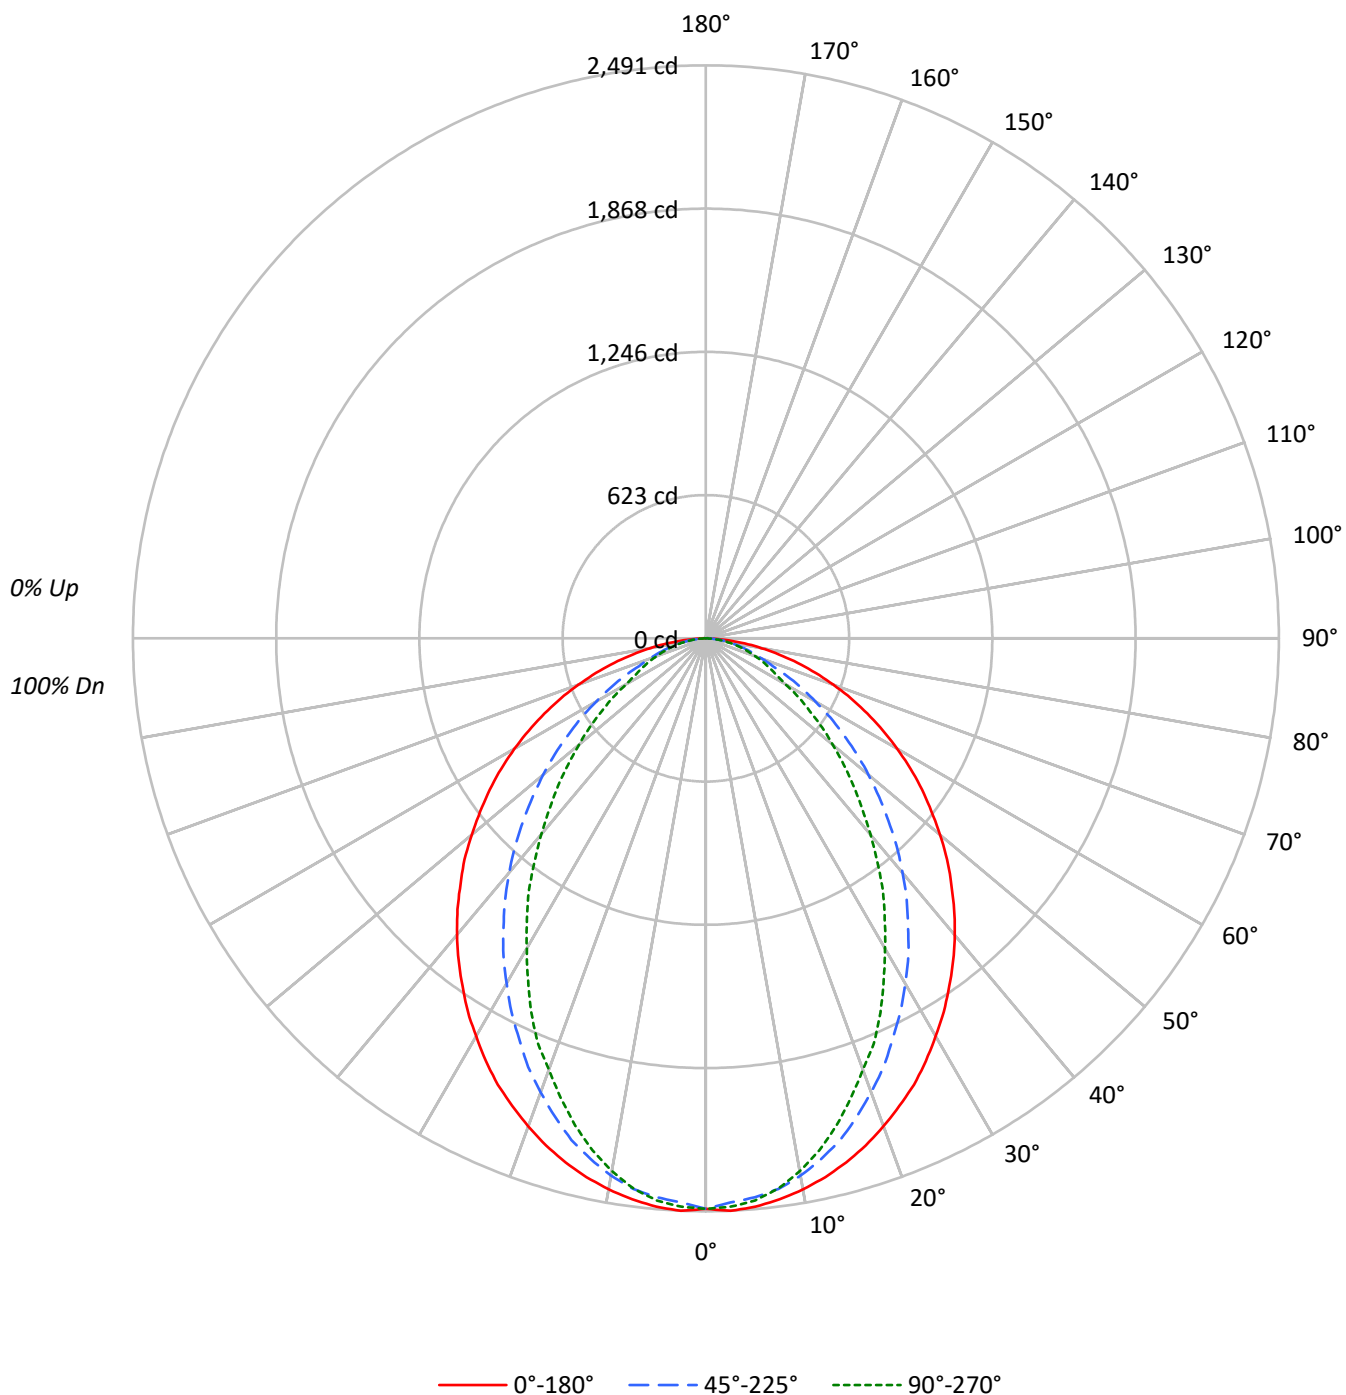

TEST NUMBER: P929988

CATALOG NUMBER: DFN2DS-4P4F0-060DS835-RLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	110	106	102	98	107	103	100	97	99	96	94		95	93	91		92
2	101	94	87	82	98	92	86	81	88	83	79		85	81	78		82
3	93	83	76	70	90	82	75	69	79	73	68		76	71	67		74
4	86	75	66	60	83	73	66	60	71	64	59		69	63	58		66
5	79	67	59	53	77	66	58	52	64	57	52		62	56	51		60
6	74	61	53	47	72	60	52	46	58	51	46		57	50	46		55
7	68	56	47	42	67	55	47	42	53	46	41		52	46	41		51
8	64	51	43	38	62	51	43	37	49	42	37		48	42	37		47
9	60	47	39	34	59	47	39	34	46	39	34		44	38	34		44
10	56	44	36	31	55	43	36	31	42	36	31		41	35	31		41

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1609	1609	1609
5°	1615	1589	1597
10°	1602	1563	1549
15°	1584	1516	1473
20°	1559	1450	1377
25°	1533	1375	1285
30°	1496	1298	1167
35°	1461	1214	1063
40°	1425	1127	943
45°	1384	1030	834
50°	1341	931	727
55°	1297	825	624
60°	1246	713	518
65°	1189	599	472
70°	1119	494	434
75°	1035	450	405
80°	913	402	369
85°	718	317	317

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1384 cd/sqm

TEST NUMBER: P929988

CATALOG NUMBER: DFN2DS-4P4F0-060DS835-RLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	232.4	4.6
10°-20°	638.0	12.5
20°-30°	895.7	17.6
30°-40°	976.4	19.1
40°-50°	897.4	17.6
50°-60°	704.8	13.8
60°-70°	458.8	9.0
70°-80°	236.1	4.6
80°-90°	60.3	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1766.2	34.6
0°-40°	2742.6	53.8
0°-60°	4344.8	85.2
0°-90°	5100.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5100.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2480	2480	2480	2480	2480	
5°	2480	2469	2439	2460	2453	235
15°	2359	2334	2258	2215	2193	665
25°	2141	2069	1921	1829	1795	985
35°	1845	1730	1533	1391	1342	1155
45°	1508	1358	1122	963	909	1165
55°	1147	972	729	595	552	1025
65°	774	592	390	314	307	768
75°	413	256	180	164	162	437
85°	96	49	43	43	43	116
90°	0	0	0	0	0	

TEST NUMBER: P929988

CATALOG NUMBER: DFN2DS-4P4F0-060DS835-RLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2479.8	2479.8	2479.8	2479.8	2479.8
2.5°	2491.0	2479.8	2455.0	2477.6	2473.1
5°	2479.8	2468.6	2439.3	2459.6	2452.9
7.5°	2459.6	2446.2	2414.8	2423.6	2412.4
10°	2432.6	2416.9	2372.2	2365.3	2351.9
12.5°	2399.1	2378.8	2318.1	2304.8	2280.0
15°	2358.6	2333.8	2257.6	2215.0	2192.6
17.5°	2311.5	2275.5	2181.2	2131.9	2096.0
20°	2257.6	2212.6	2100.5	2044.5	1995.0
22.5°	2199.3	2147.6	2017.4	1941.2	1907.6
25°	2141.0	2069.1	1921.0	1829.1	1795.3
27.5°	2071.5	1995.0	1831.2	1725.7	1674.1
30°	1997.4	1911.9	1732.4	1618.1	1557.4
32.5°	1925.5	1822.2	1638.4	1503.6	1447.4
35°	1844.8	1730.3	1532.9	1391.4	1341.9
37.5°	1766.2	1642.6	1434.1	1279.1	1223.1
40°	1683.1	1548.6	1330.7	1171.4	1113.1
42.5°	1597.9	1454.3	1227.6	1061.4	1005.5
45°	1508.1	1357.6	1122.2	962.6	908.8
47.5°	1422.9	1263.6	1021.2	861.7	812.4
50°	1328.6	1169.3	922.4	767.4	720.5
52.5°	1236.4	1068.1	828.1	680.0	637.4
55°	1146.7	971.7	729.3	594.8	552.1
57.5°	1054.8	875.2	641.9	516.2	480.2
60°	960.5	781.0	549.8	435.5	399.5
62.5°	868.6	689.1	471.2	363.6	345.7
65°	774.3	592.4	390.5	314.3	307.4
67.5°	684.5	502.6	314.3	276.0	269.3
70°	590.2	415.2	260.2	237.9	228.8
72.5°	500.5	334.3	217.6	199.8	195.2
75°	412.9	255.7	179.5	163.8	161.7
77.5°	325.5	181.7	141.4	132.4	127.9
80°	244.5	130.2	107.6	98.8	98.8
82.5°	170.5	87.6	74.0	69.5	69.5
85°	96.4	49.3	42.6	42.6	42.6
87.5°	36.0	17.9	17.9	15.7	15.7
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P929988

CATALOG NUMBER: DFN2DS-4P4F0-060DS835-RLI

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.89	14.41	13.25	14.72	15.04	8.85	10.37	9.21	10.68	11.00
	3H	14.65	16.02	15.03	16.34	16.71	10.11	11.48	10.49	11.81	12.17
	4H	15.32	16.60	15.72	16.95	17.33	10.61	11.89	11.01	12.24	12.62
	6H	15.81	16.99	16.22	17.36	17.75	11.00	12.18	11.41	12.54	12.94
	8H	15.97	17.10	16.40	17.49	17.89	11.12	12.25	11.55	12.64	13.04
	12H	16.08	17.15	16.51	17.54	17.97	11.20	12.28	11.63	12.66	13.09
4H	2H	12.99	14.27	13.39	14.62	15.00	9.54	10.82	9.94	11.17	11.55
	3H	14.92	15.99	15.33	16.39	16.79	10.99	12.05	11.40	12.45	12.85
	4H	15.67	16.63	16.11	17.05	17.48	11.59	12.54	12.02	12.96	13.40
	6H	16.27	17.10	16.72	17.54	18.00	12.07	12.91	12.53	13.35	13.81
	8H	16.48	17.26	16.94	17.70	18.17	12.24	13.01	12.70	13.46	13.92
	12H	16.63	17.33	17.11	17.81	18.28	12.35	13.05	12.83	13.53	14.00
8H	4H	15.70	16.47	16.16	16.92	17.39	11.94	12.72	12.40	13.16	13.63
	6H	16.33	16.98	16.83	17.47	17.95	12.53	13.17	13.02	13.66	14.14
	8H	16.59	17.16	17.10	17.67	18.16	12.75	13.32	13.26	13.83	14.32
	12H	16.79	17.30	17.30	17.79	18.36	12.93	13.44	13.44	13.93	14.49
12H	4H	15.68	16.38	16.16	16.85	17.33	11.98	12.68	12.46	13.16	13.63
	6H	16.32	16.89	16.83	17.40	17.89	12.59	13.17	13.10	13.68	14.16
	8H	16.60	17.11	17.11	17.60	18.17	12.86	13.37	13.37	13.86	14.43