

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P929953

Luminaire Tested: DFN2DS-4P4F0-040DS840-FLL

Issue Date: 11/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P929953
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P333812)
Test Lab: INNOVATION CENTER
Issue Date: 11/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DS-4P4F0-040DS840-FLL
Description: 4 foot, 90deg - 4way Define Geo, with Direct Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3963.9 lumens
Efficiency: N/A
Efficacy: 100.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular (W 4.07' x L: 4.07' x H: 0')
CIE Type: Direct

Input Watts (W): 39.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P929953

CATALOG NUMBER: DFN2DS-4P4F0-040DS840-FLL

Luminous Intensity Polar Plot

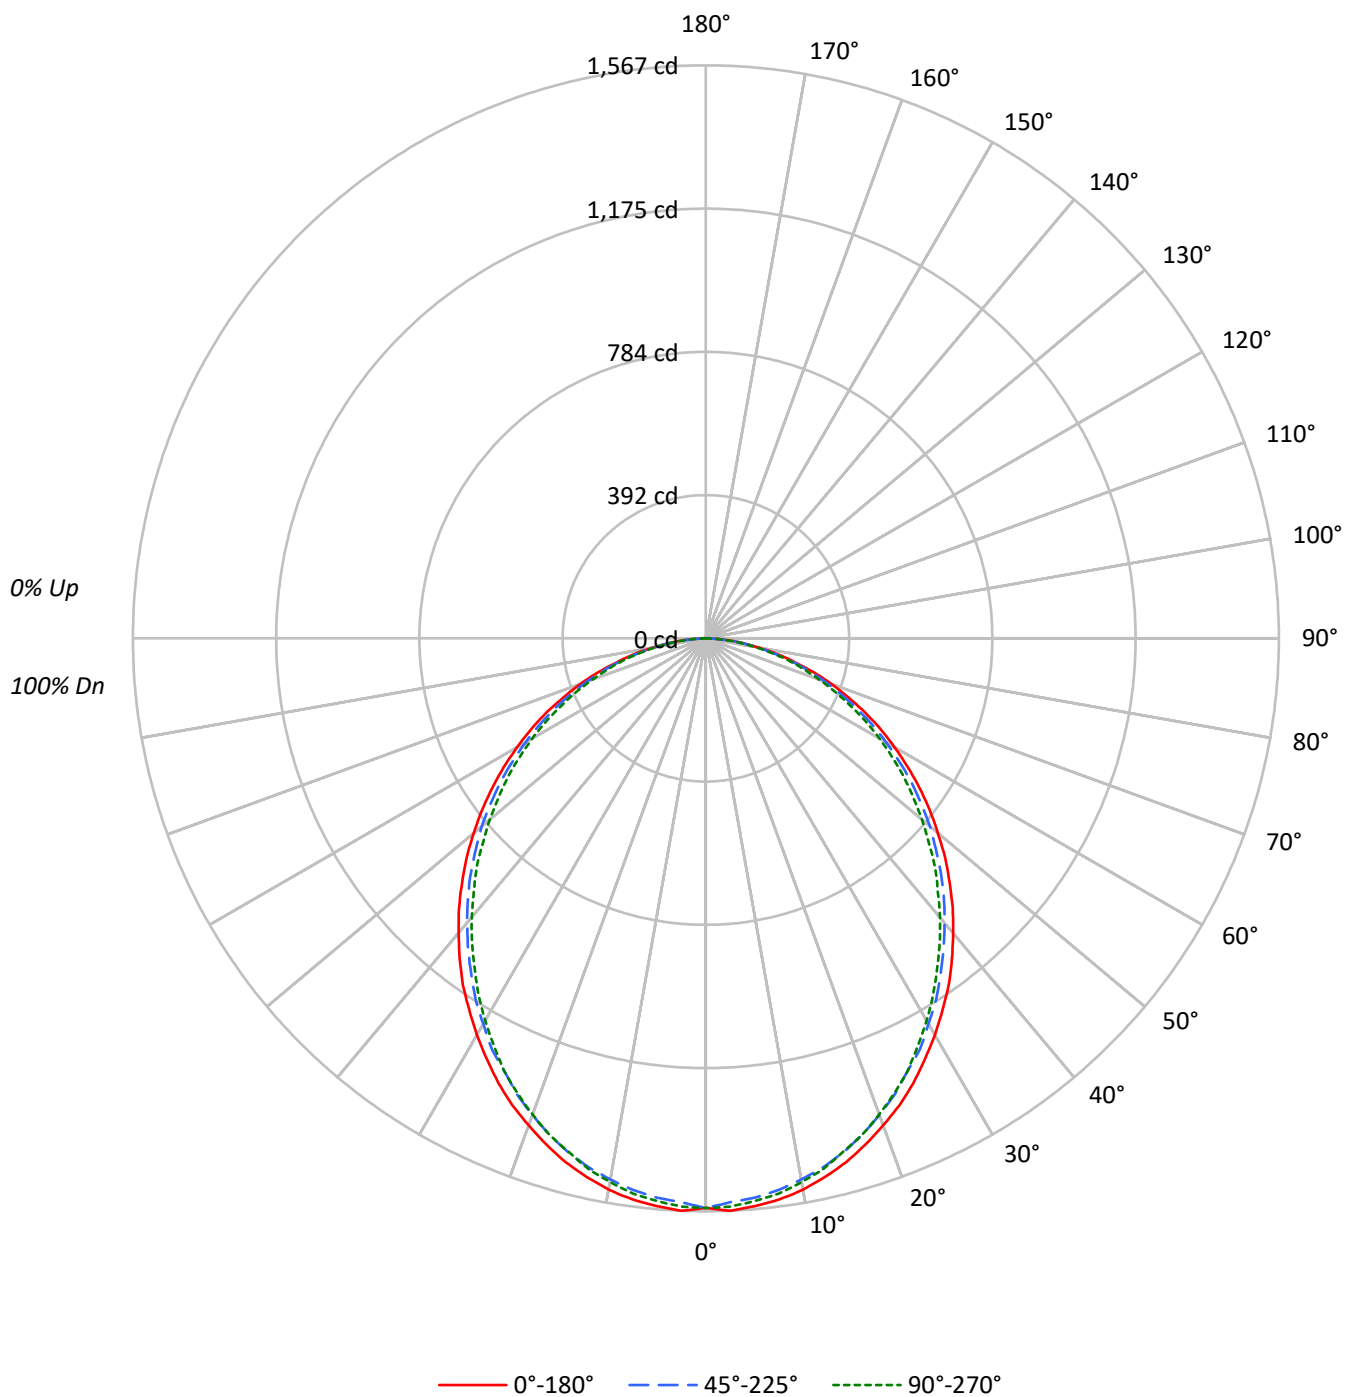

TEST NUMBER: P929953

CATALOG NUMBER: DFN2DS-4P4F0-040DS840-FLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	109	104	100	96	106	102	98	95	98	95	92		94	91	89		90
2	99	91	85	79	97	89	83	78	86	81	76		83	78	74		80
3	91	80	72	66	88	79	71	65	76	69	64		73	68	63		71
4	83	71	63	56	81	70	62	56	68	61	55		65	59	54		63
5	77	64	55	49	75	63	55	48	61	53	48		59	52	47		57
6	71	58	49	43	69	57	48	42	55	48	42		53	47	42		52
7	66	52	44	38	64	52	43	38	50	43	37		49	42	37		47
8	61	48	40	34	60	47	39	34	46	39	33		45	38	33		44
9	57	44	36	30	56	43	36	30	42	35	30		41	35	30		40
10	54	41	33	28	53	40	33	28	39	32	27		38	32	27		37

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1011	1011	1011
5°	1015	1000	1006
10°	1009	990	995
15°	996	977	976
20°	978	958	957
25°	961	934	934
30°	938	912	905
35°	917	886	873
40°	891	860	844
45°	865	834	814
50°	836	807	779
55°	807	776	747
60°	774	739	711
65°	738	702	669
70°	693	656	625
75°	631	604	590
80°	560	542	515
85°	457	435	391

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 865 cd/sqm

TEST NUMBER: P929953

CATALOG NUMBER: DFN2DS-4P4F0-040DS840-FLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	146.6	3.7
10°-20°	412.6	10.4
20°-30°	606.3	15.3
30°-40°	704.2	17.8
40°-50°	703.3	17.7
50°-60°	613.3	15.5
60°-70°	453.4	11.4
70°-80°	256.5	6.5
80°-90°	67.7	1.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1165.5	29.4
0°-40°	1869.8	47.2
0°-60°	3186.4	80.4
0°-90°	3963.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3963.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1558	1558	1558	1558	1558	
5°	1558	1552	1536	1547	1545	148
15°	1483	1474	1455	1461	1453	418
25°	1342	1330	1305	1308	1305	618
35°	1158	1143	1119	1110	1103	723
45°	942	932	909	893	887	727
55°	713	704	686	668	661	638
65°	481	472	457	443	436	476
75°	252	249	241	232	235	269
85°	61	60	58	54	52	72
90°	0	0	0	0	0	

TEST NUMBER: P929953

CATALOG NUMBER: DFN2DS-4P4F0-040DS840-FLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1558.0	1558.0	1558.0	1558.0	1558.0
2.5°	1567.1	1559.6	1543.0	1558.0	1555.2
5°	1558.0	1552.1	1535.5	1547.4	1544.6
7.5°	1547.4	1538.5	1522.0	1534.1	1531.1
10°	1531.1	1520.6	1502.7	1514.6	1510.1
12.5°	1508.5	1499.6	1481.7	1489.2	1486.1
15°	1483.1	1474.2	1454.7	1460.7	1453.3
17.5°	1451.7	1442.7	1423.2	1430.6	1423.2
20°	1417.1	1408.2	1387.3	1391.7	1385.9
22.5°	1382.8	1369.3	1349.7	1349.7	1346.7
25°	1342.2	1330.3	1304.9	1307.8	1304.9
27.5°	1297.3	1286.8	1267.5	1263.0	1255.6
30°	1252.5	1240.4	1218.0	1213.5	1207.5
32.5°	1204.5	1195.6	1171.6	1162.6	1156.5
35°	1158.1	1143.1	1119.1	1110.1	1102.6
37.5°	1105.6	1092.1	1068.1	1057.7	1050.1
40°	1051.8	1039.6	1015.6	1002.3	996.3
42.5°	999.3	987.2	963.4	948.2	939.3
45°	942.3	931.9	909.3	893.0	886.9
47.5°	886.9	876.4	852.5	835.9	827.0
50°	828.4	820.9	800.0	779.0	771.5
52.5°	771.5	761.1	741.6	725.1	714.6
55°	713.2	704.1	686.2	668.2	660.8
57.5°	654.7	647.2	627.6	609.7	603.7
60°	596.2	590.3	569.4	552.9	548.3
62.5°	539.3	528.8	513.9	498.9	492.9
65°	481.0	471.9	457.0	443.4	436.0
67.5°	421.0	413.4	400.1	389.6	383.6
70°	365.6	359.6	346.0	335.5	329.6
72.5°	308.7	302.6	295.2	284.7	280.2
75°	251.7	248.7	241.1	232.2	235.2
77.5°	200.7	194.7	191.7	187.2	182.8
80°	149.8	148.2	145.2	140.8	137.8
82.5°	101.9	101.9	100.5	94.4	94.4
85°	61.4	60.0	58.5	53.9	52.5
87.5°	27.0	24.0	21.0	16.5	14.9
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P929953

CATALOG NUMBER: DFN2DS-4P4F0-040DS840-FLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.32	12.93	11.68	13.24	13.56	10.88	12.49	11.24	12.80	13.11
	3H	13.07	14.52	13.45	14.85	15.21	12.58	14.03	12.96	14.36	14.72
	4H	13.72	15.09	14.11	15.43	15.81	13.22	14.59	13.62	14.94	15.31
	6H	14.18	15.45	14.60	15.82	16.21	13.68	14.95	14.09	15.32	15.71
	8H	14.33	15.54	14.75	15.93	16.33	13.83	15.04	14.25	15.42	15.82
	12H	14.42	15.58	14.85	15.96	16.39	13.91	15.07	14.34	15.45	15.88
4H	2H	11.88	13.25	12.28	13.60	13.97	11.53	12.90	11.93	13.24	13.62
	3H	13.86	15.00	14.26	15.40	15.80	13.45	14.59	13.86	14.99	15.39
	4H	14.63	15.67	15.06	16.08	16.52	14.21	15.24	14.64	15.66	16.09
	6H	15.23	16.13	15.68	16.57	17.03	14.80	15.70	15.25	16.14	16.60
	8H	15.42	16.26	15.88	16.71	17.17	14.98	15.83	15.44	16.27	16.73
	12H	15.55	16.31	16.03	16.79	17.25	15.10	15.86	15.58	16.33	16.80
8H	4H	14.91	15.75	15.37	16.19	16.66	14.53	15.38	14.99	15.82	16.29
	6H	15.62	16.32	16.11	16.81	17.29	15.24	15.94	15.73	16.43	16.90
	8H	15.88	16.51	16.39	17.02	17.50	15.49	16.12	16.00	16.62	17.11
	12H	16.08	16.64	16.59	17.13	17.69	15.67	16.22	16.17	16.71	17.27
12H	4H	14.93	15.69	15.41	16.17	16.64	14.57	15.33	15.05	15.80	16.27
	6H	15.66	16.30	16.17	16.80	17.29	15.30	15.93	15.81	16.43	16.92
	8H	15.98	16.54	16.49	17.03	17.59	15.60	16.16	16.11	16.65	17.21

END OF REPORT