

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P930384

Luminaire Tested: DFN2DS-HX4F0-110DS835-RLL

Issue Date: 11/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P930384
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P333882)
Test Lab: INNOVATION CENTER
Issue Date: 11/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DS-HX4F0-110DS835-RLL
Description: 4 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9350.0 lumens
Efficiency: N/A
Efficacy: 79.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 4.09' x L: 3.54' x H: 0')
CIE Type: Direct

Input Watts (W): 117.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9967
Total Harmonic Distortion (THDi): 0.063
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P930384

CATALOG NUMBER: DFN2DS-HX4F0-110DS835-RLL

Luminous Intensity Polar Plot

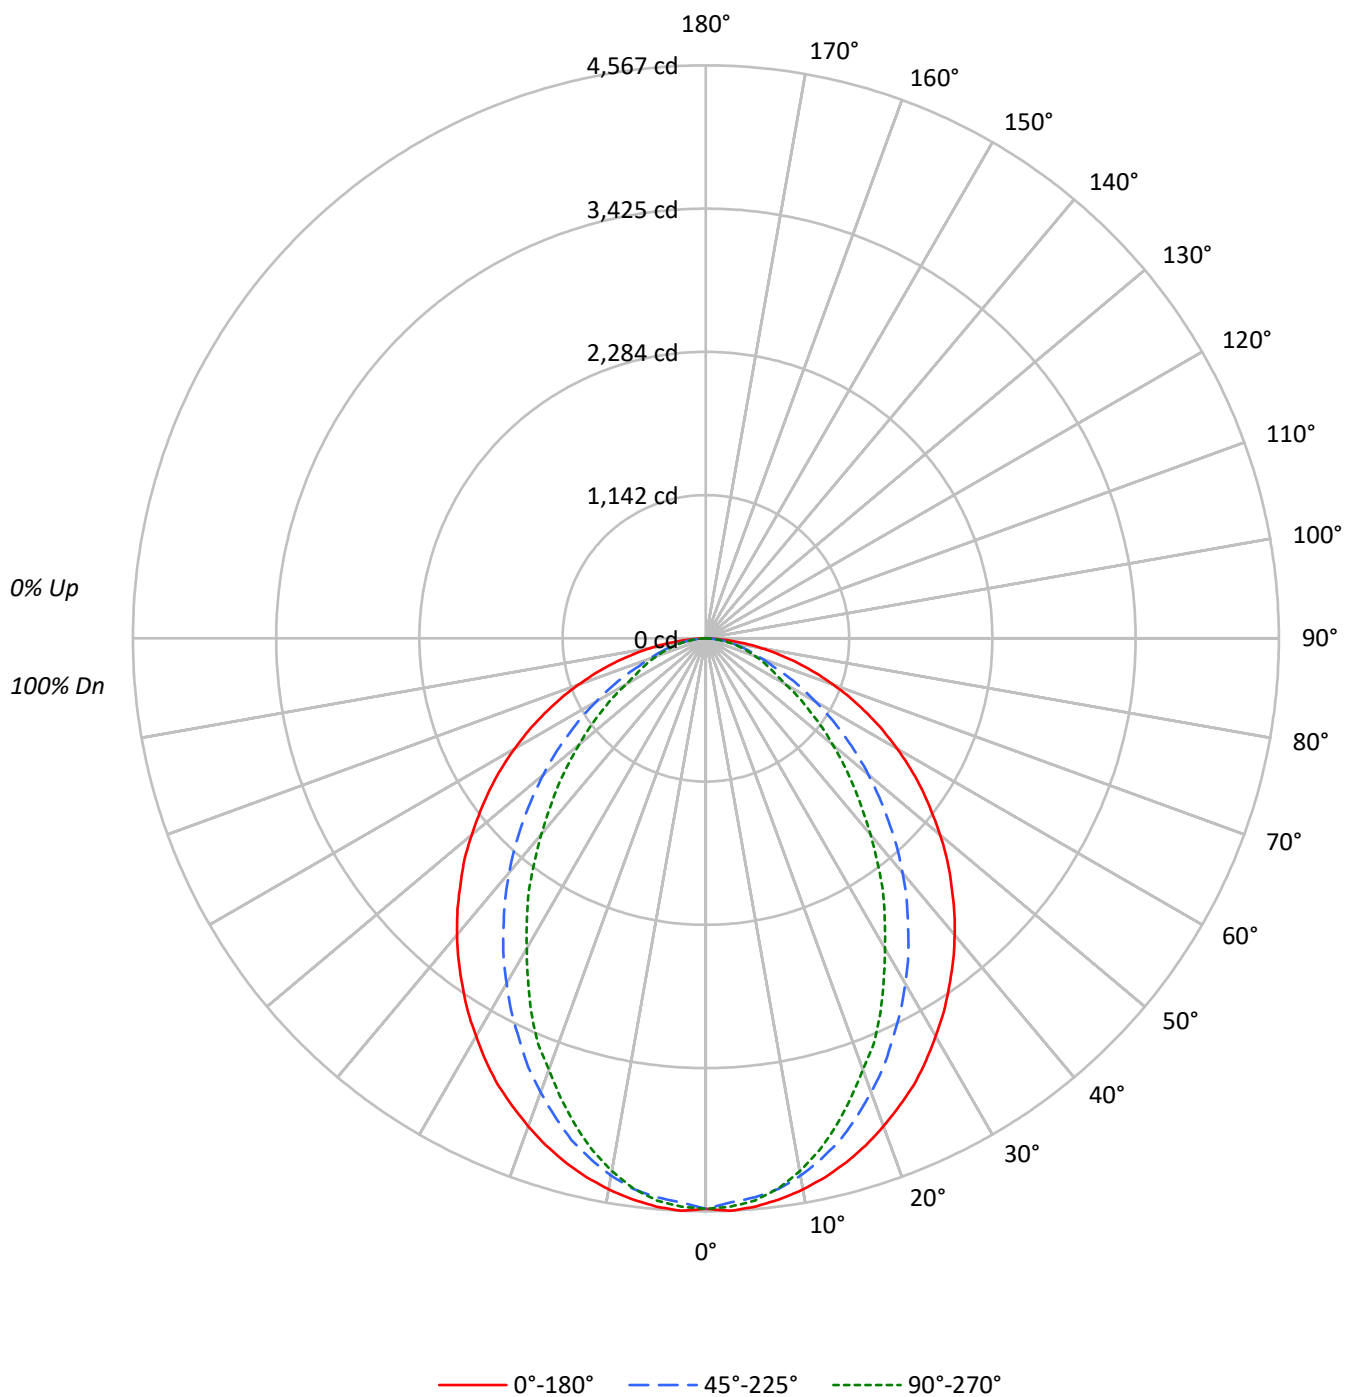

TEST NUMBER: P930384

CATALOG NUMBER: DFN2DS-HX4F0-110DS835-RLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	110	106	102	98	107	103	100	97	99	96	94		95	93	91		92
2	101	94	87	82	98	92	86	81	88	83	79		85	81	78		82
3	93	83	76	70	90	82	75	69	79	73	68		76	71	67		74
4	86	75	66	60	83	73	66	60	71	64	59		69	63	58		66
5	79	67	59	53	77	66	58	52	64	57	52		62	56	51		60
6	74	61	53	47	72	60	52	46	58	51	46		57	50	46		55
7	68	56	47	42	67	55	47	42	53	46	41		52	46	41		51
8	64	51	43	38	62	51	43	37	49	42	37		48	42	37		47
9	60	47	39	34	59	47	39	34	46	39	34		44	38	34		44
10	56	44	36	31	55	43	36	31	42	36	31		41	35	31		41

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3380	3380	3380
5°	3393	3338	3357
10°	3367	3284	3256
15°	3329	3186	3094
20°	3275	3047	2894
25°	3220	2889	2700
30°	3144	2727	2451
35°	3070	2551	2233
40°	2995	2368	1981
45°	2907	2163	1752
50°	2818	1956	1528
55°	2725	1733	1312
60°	2619	1499	1089
65°	2498	1260	991
70°	2353	1037	912
75°	2175	945	852
80°	1920	845	776
85°	1508	666	666

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2907 cd/sqm

TEST NUMBER: P930384

CATALOG NUMBER: DFN2DS-HX4F0-110DS835-RLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	426.1	4.6
10°-20°	1169.7	12.5
20°-30°	1642.2	17.6
30°-40°	1790.1	19.1
40°-50°	1645.3	17.6
50°-60°	1292.1	13.8
60°-70°	841.1	9.0
70°-80°	432.9	4.6
80°-90°	110.5	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3238.0	34.6
0°-40°	5028.1	53.8
0°-60°	7965.5	85.2
0°-90°	9350.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	9350.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4546	4546	4546	4546	4546	
5°	4546	4526	4472	4509	4497	431
15°	4324	4279	4139	4061	4020	1218
25°	3925	3793	3522	3353	3291	1805
35°	3382	3172	2810	2551	2460	2117
45°	2765	2489	2057	1765	1666	2135
55°	2102	1781	1337	1090	1012	1879
65°	1420	1086	716	576	564	1407
75°	757	469	329	300	296	801
85°	177	90	78	78	78	212
90°	0	0	0	0	0	

TEST NUMBER: P930384

CATALOG NUMBER: DFN2DS-HX4F0-110DS835-RLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4546.3	4546.3	4546.3	4546.3	4546.3
2.5°	4566.8	4546.3	4500.9	4542.4	4534.1
5°	4546.3	4525.8	4472.1	4509.2	4497.0
7.5°	4509.2	4484.7	4427.1	4443.3	4422.7
10°	4459.9	4431.0	4349.0	4336.3	4311.9
12.5°	4398.3	4361.2	4249.9	4225.4	4180.0
15°	4324.1	4278.7	4139.0	4060.9	4019.8
17.5°	4237.7	4171.8	3998.9	3908.5	3842.6
20°	4139.0	4056.5	3850.9	3748.3	3657.5
22.5°	4032.1	3937.3	3698.6	3558.9	3497.3
25°	3925.1	3793.3	3521.8	3353.3	3291.3
27.5°	3797.7	3657.5	3357.2	3163.8	3069.1
30°	3661.9	3505.2	3176.1	2966.5	2855.2
32.5°	3530.1	3340.6	3003.6	2756.6	2653.6
35°	3382.1	3172.1	2810.3	2551.0	2460.2
37.5°	3238.1	3011.5	2629.1	2344.9	2242.4
40°	3085.7	2839.1	2439.7	2147.6	2040.7
42.5°	2929.4	2666.2	2250.7	1946.0	1843.4
45°	2764.9	2489.0	2057.3	1764.8	1666.2
47.5°	2608.6	2316.6	1872.2	1579.7	1489.4
50°	2435.7	2143.7	1691.1	1406.9	1320.9
52.5°	2266.8	1958.2	1518.2	1246.7	1168.5
55°	2102.2	1781.4	1337.0	1090.4	1012.3
57.5°	1933.8	1604.6	1176.8	946.4	880.4
60°	1760.9	1431.8	1007.9	798.4	732.5
62.5°	1592.4	1263.3	863.9	666.6	633.8
65°	1419.5	1086.0	715.9	576.2	563.5
67.5°	1255.0	921.5	576.2	505.9	493.7
70°	1082.1	761.3	477.1	436.1	419.5
72.5°	917.5	612.9	399.0	366.2	357.9
75°	756.9	468.8	329.1	300.3	296.4
77.5°	596.7	333.1	259.3	242.7	234.4
80°	448.3	238.8	197.3	181.2	181.2
82.5°	312.5	160.6	135.8	127.5	127.5
85°	176.8	90.4	78.1	78.1	78.1
87.5°	65.9	32.7	32.7	28.8	28.8
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P930384

CATALOG NUMBER: DFN2DS-HX4F0-110DS835-RLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.47	16.99	15.83	17.30	17.62	11.43	12.95	11.79	13.26	13.58
	3H	17.23	18.60	17.61	18.92	19.29	12.69	14.06	13.07	14.39	14.75
	4H	17.90	19.18	18.30	19.53	19.91	13.19	14.47	13.59	14.82	15.20
	6H	18.39	19.57	18.80	19.94	20.33	13.57	14.76	13.99	15.12	15.52
	8H	18.55	19.68	18.98	20.07	20.47	13.70	14.83	14.13	15.22	15.62
	12H	18.66	19.73	19.09	20.12	20.55	13.78	14.86	14.21	15.24	15.67
4H	2H	15.57	16.85	15.97	17.20	17.58	12.12	13.40	12.52	13.75	14.13
	3H	17.50	18.57	17.91	18.97	19.37	13.57	14.63	13.98	15.03	15.43
	4H	18.25	19.21	18.69	19.63	20.06	14.17	15.12	14.60	15.54	15.98
	6H	18.85	19.68	19.30	20.12	20.58	14.65	15.49	15.11	15.93	16.39
	8H	19.06	19.84	19.52	20.28	20.75	14.82	15.59	15.28	16.04	16.50
	12H	19.21	19.91	19.70	20.39	20.86	14.93	15.63	15.41	16.11	16.58
8H	4H	18.28	19.05	18.74	19.50	19.97	14.52	15.30	14.98	15.74	16.21
	6H	18.92	19.56	19.41	20.05	20.53	15.11	15.75	15.60	16.24	16.72
	8H	19.17	19.74	19.68	20.25	20.74	15.33	15.90	15.84	16.41	16.90
	12H	19.37	19.88	19.88	20.37	20.94	15.51	16.02	16.02	16.51	17.07
12H	4H	18.26	18.96	18.74	19.43	19.91	14.56	15.26	15.04	15.74	16.21
	6H	18.90	19.47	19.41	19.98	20.47	15.17	15.75	15.68	16.26	16.74
	8H	19.18	19.69	19.69	20.18	20.75	15.44	15.95	15.95	16.44	17.01