

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P930331

Luminaire Tested: DFN2DS-HX4F0-080DS840-FLL

Issue Date: 11/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P930331
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P333812)
Test Lab: INNOVATION CENTER
Issue Date: 11/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DS-HX4F0-080DS840-FLL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7927.9 lumens
Efficiency: N/A
Efficacy: 97.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular (W 4.09' x L: 3.54' x H: 0')
CIE Type: Direct

Input Watts (W): 81.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9613
Total Harmonic Distortion (THDi): 0.083
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P930331

CATALOG NUMBER: DFN2DS-HX4F0-080DS840-FLL

Luminous Intensity Polar Plot

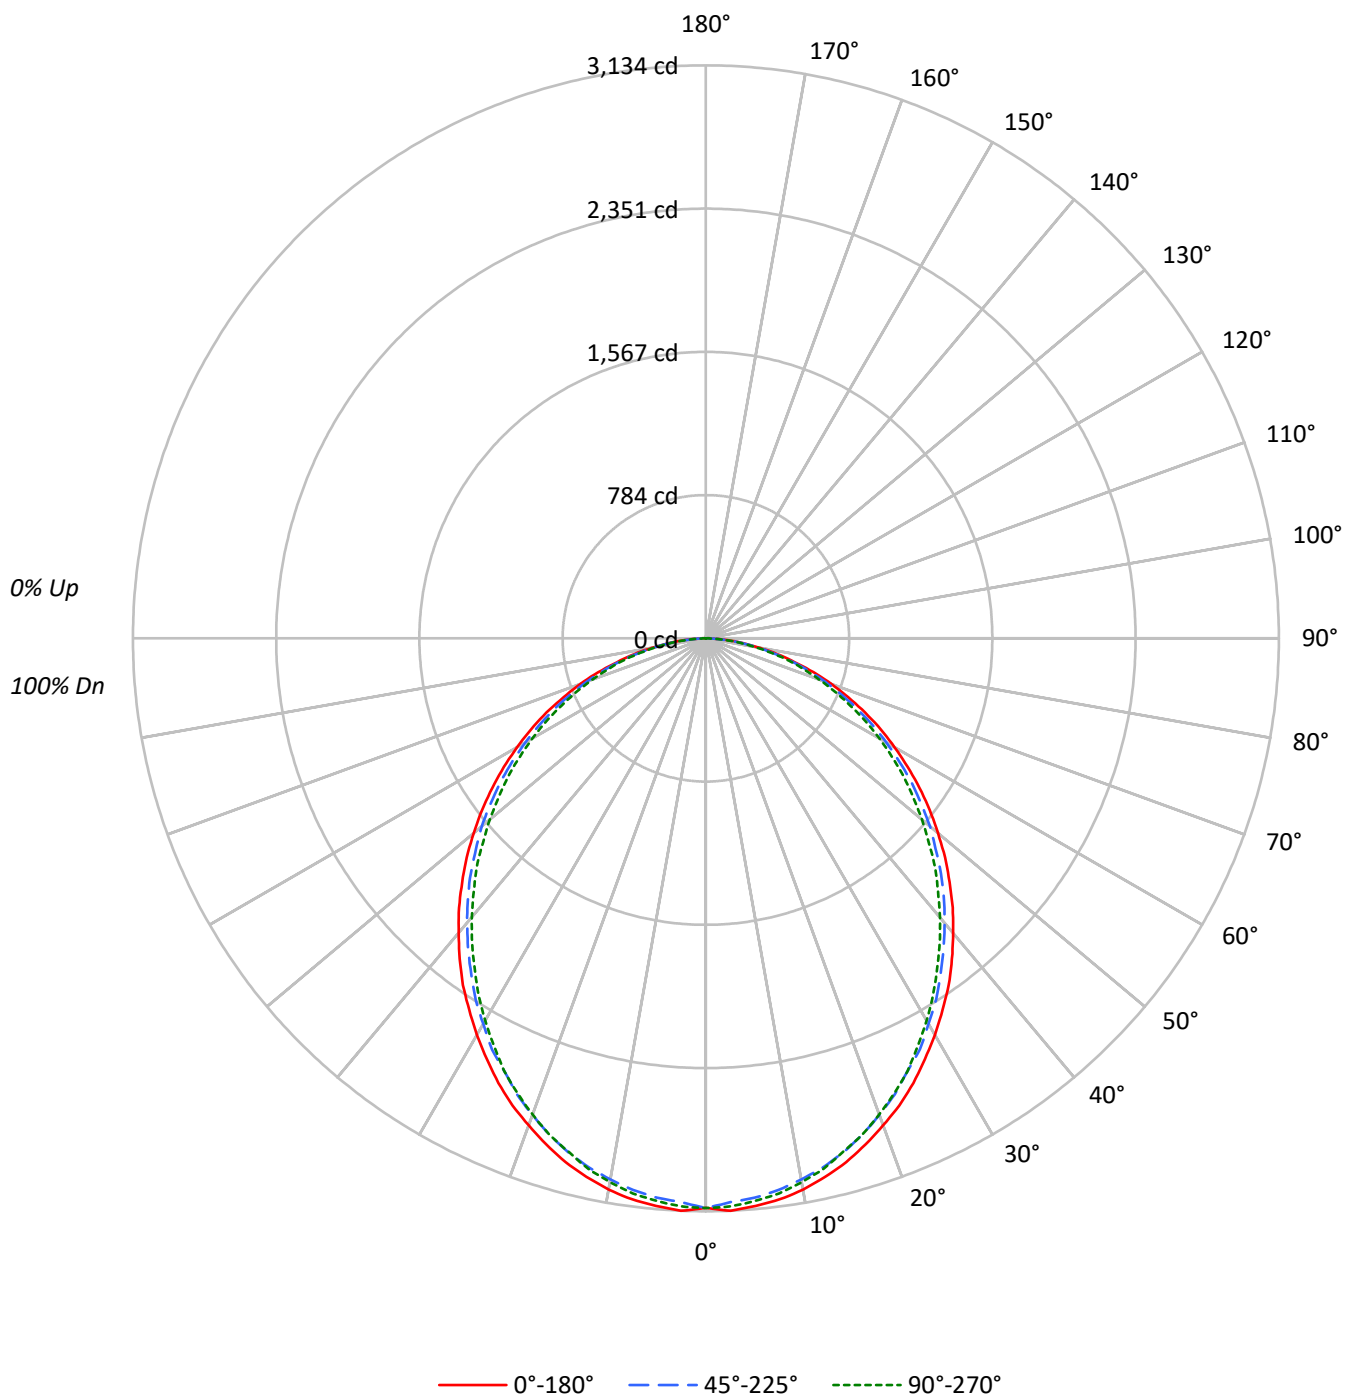

TEST NUMBER: P930331

CATALOG NUMBER: DFN2DS-HX4F0-080DS840-FLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	109	104	100	96	106	102	98	95	98	95	92		94	91	89		90
2	99	91	85	79	97	89	83	78	86	81	76		83	78	74		80
3	91	80	72	66	88	79	71	65	76	69	64		73	68	63		71
4	83	71	63	56	81	70	62	56	68	61	55		65	59	54		63
5	77	64	55	49	75	63	55	48	61	53	48		59	52	47		57
6	71	58	49	43	69	57	48	42	55	48	42		53	47	42		52
7	66	52	44	38	64	52	43	38	50	43	37		49	42	37		47
8	61	48	40	34	60	47	39	34	46	39	33		45	38	33		44
9	57	44	36	30	56	43	36	30	42	35	30		41	35	30		40
10	54	41	33	28	53	40	33	28	39	32	27		38	32	27		37

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2317	2317	2317
5°	2326	2292	2306
10°	2312	2269	2280
15°	2283	2240	2237
20°	2243	2195	2193
25°	2203	2141	2141
30°	2151	2092	2074
35°	2102	2032	2002
40°	2042	1972	1934
45°	1982	1912	1865
50°	1917	1851	1785
55°	1849	1779	1713
60°	1773	1693	1631
65°	1693	1608	1534
70°	1589	1505	1433
75°	1446	1386	1352
80°	1284	1244	1180
85°	1047	998	895

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1982 cd/sqm

TEST NUMBER: P930331

CATALOG NUMBER: DFN2DS-HX4F0-080DS840-FLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	293.3	3.7
10°-20°	825.2	10.4
20°-30°	1212.7	15.3
30°-40°	1408.4	17.8
40°-50°	1406.7	17.7
50°-60°	1226.6	15.5
60°-70°	906.7	11.4
70°-80°	513.0	6.5
80°-90°	135.4	1.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2331.1	29.4
0°-40°	3739.5	47.2
0°-60°	6372.8	80.4
0°-90°	7927.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7927.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3116	3116	3116	3116	3116	
5°	3116	3104	3071	3095	3089	296
15°	2966	2948	2909	2921	2906	835
25°	2685	2661	2610	2616	2610	1235
35°	2316	2286	2238	2220	2205	1446
45°	1885	1864	1819	1786	1774	1455
55°	1426	1408	1372	1336	1321	1275
65°	962	944	914	887	872	951
75°	503	498	482	464	470	537
85°	123	120	117	108	105	144
90°	0	0	0	0	0	

TEST NUMBER: P930331

CATALOG NUMBER: DFN2DS-HX4F0-080DS840-FLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3115.9	3115.9	3115.9	3115.9	3115.9
2.5°	3134.0	3119.1	3086.1	3115.9	3110.2
5°	3115.9	3104.2	3071.2	3095.0	3089.3
7.5°	3095.0	3077.2	3044.1	3068.3	3062.3
10°	3062.3	3041.2	3005.3	3029.1	3020.3
12.5°	3017.1	2999.3	2963.4	2978.3	2972.3
15°	2966.3	2948.4	2909.3	2921.4	2906.5
17.5°	2903.3	2885.5	2846.3	2861.4	2846.3
20°	2834.3	2816.5	2774.6	2783.5	2771.7
22.5°	2765.7	2738.6	2699.5	2699.5	2693.5
25°	2684.6	2660.8	2609.9	2615.6	2609.9
27.5°	2594.6	2573.7	2534.8	2525.9	2511.0
30°	2505.0	2480.8	2436.0	2427.1	2415.0
32.5°	2409.0	2391.2	2343.1	2325.0	2313.0
35°	2316.1	2286.3	2238.2	2220.1	2205.2
37.5°	2211.2	2184.2	2136.2	2115.2	2100.3
40°	2103.5	2079.3	2031.3	2004.6	1992.5
42.5°	1998.6	1974.4	1926.7	1896.5	1878.8
45°	1884.8	1863.8	1818.6	1785.9	1773.9
47.5°	1773.9	1752.9	1704.8	1671.8	1654.0
50°	1656.9	1641.9	1599.9	1558.0	1543.0
52.5°	1543.0	1522.0	1483.3	1450.2	1429.2
55°	1426.3	1408.2	1372.4	1336.4	1321.4
57.5°	1309.4	1294.5	1255.4	1219.4	1207.3
60°	1192.4	1180.7	1138.6	1105.6	1096.7
62.5°	1078.6	1057.7	1027.7	997.9	985.8
65°	962.0	943.8	913.9	886.9	872.0
67.5°	842.0	826.8	800.1	779.2	767.1
70°	731.1	719.0	692.1	671.1	659.3
72.5°	617.3	605.3	590.3	569.4	560.5
75°	503.2	497.5	482.3	464.5	470.5
77.5°	401.5	389.4	383.4	374.5	365.6
80°	299.8	296.6	290.6	281.7	275.6
82.5°	203.8	203.8	200.9	188.8	188.8
85°	122.7	119.8	117.0	107.8	104.9
87.5°	54.1	48.0	41.9	33.0	29.9
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P930331

CATALOG NUMBER: DFN2DS-HX4F0-080DS840-FLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.20	15.81	14.57	16.13	16.44	13.76	15.37	14.12	15.68	16.00
	3H	15.95	17.41	16.33	17.73	18.09	15.46	16.92	15.84	17.24	17.60
	4H	16.60	17.97	17.00	18.31	18.69	16.10	17.47	16.50	17.82	18.20
	6H	17.07	18.34	17.48	18.70	19.09	16.57	17.83	16.98	18.20	18.59
	8H	17.21	18.42	17.64	18.81	19.21	16.71	17.92	17.13	18.31	18.71
	12H	17.30	18.46	17.73	18.84	19.27	16.79	17.95	17.22	18.33	18.76
4H	2H	14.76	16.13	15.16	16.48	16.86	14.41	15.78	14.81	16.13	16.50
	3H	16.74	17.88	17.15	18.28	18.68	16.33	17.48	16.74	17.87	18.27
	4H	17.51	18.55	17.95	18.96	19.40	17.09	18.13	17.52	18.54	18.98
	6H	18.11	19.02	18.56	19.46	19.91	17.68	18.58	18.13	19.02	19.48
	8H	18.30	19.15	18.76	19.59	20.05	17.86	18.71	18.32	19.15	19.62
	12H	18.43	19.19	18.91	19.67	20.14	17.98	18.74	18.46	19.22	19.68
8H	4H	17.79	18.63	18.25	19.08	19.54	17.41	18.26	17.87	18.70	19.17
	6H	18.50	19.20	19.00	19.69	20.17	18.12	18.82	18.61	19.31	19.79
	8H	18.76	19.39	19.27	19.90	20.38	18.37	19.00	18.88	19.51	19.99
	12H	18.96	19.52	19.47	20.01	20.57	18.55	19.11	19.05	19.60	20.16
12H	4H	17.81	18.57	18.29	19.05	19.52	17.45	18.21	17.93	18.68	19.15
	6H	18.55	19.18	19.06	19.69	20.17	18.18	18.81	18.69	19.32	19.80
	8H	18.86	19.42	19.37	19.91	20.47	18.48	19.04	18.99	19.53	20.09