

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P930579

Luminaire Tested: DFN2DS-PN3F0-070DS830-FLL

Issue Date: 11/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P930579
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P333812)
Test Lab: INNOVATION CENTER
Issue Date: 11/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DS-PN3F0-070DS830-FLL
Description: 3 foot, Pentagon Define Geo, with Direct Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6528.1 lumens
Efficiency: N/A
Efficacy: 88.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular (W 3.11' x L: 2.96' x H: 0')
CIE Type: Direct

Input Watts (W): 73.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.946
Total Harmonic Distortion (THDi): 0.132
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P930579

CATALOG NUMBER: DFN2DS-PN3F0-070DS830-FLL

Luminous Intensity Polar Plot

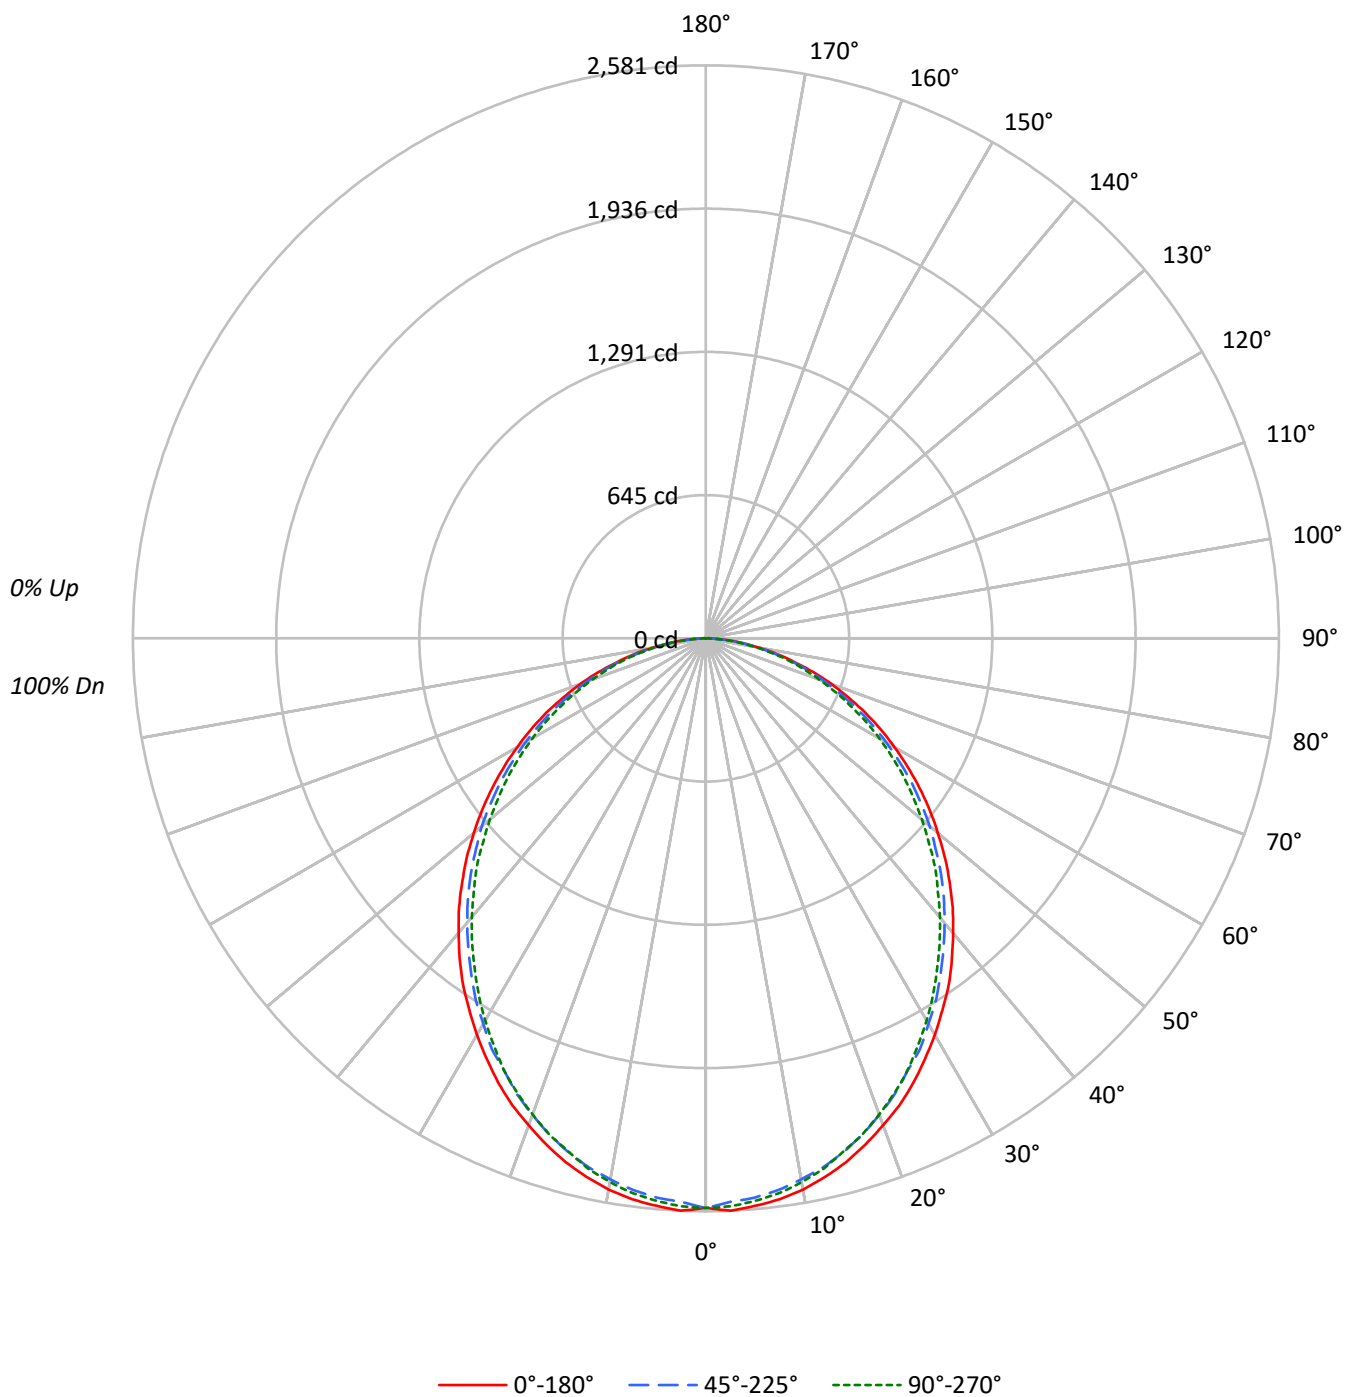

TEST NUMBER: P930579

CATALOG NUMBER: DFN2DS-PN3F0-070DS830-FLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	109	104	100	96	106	102	98	95	98	95	92		94	91	89		90
2	99	91	85	79	97	89	83	78	86	81	76		83	78	74		80
3	91	80	72	66	88	79	71	65	76	69	64		73	68	63		71
4	83	71	63	56	81	70	62	56	68	61	55		65	59	54		63
5	77	64	55	49	75	63	55	48	61	53	48		59	52	47		57
6	71	58	49	43	69	57	48	42	55	48	42		53	47	42		52
7	66	52	44	38	64	52	43	38	50	43	37		49	42	37		47
8	61	48	40	34	60	47	39	34	46	39	33		45	38	33		44
9	57	44	36	30	56	43	36	30	42	35	30		41	35	30		40
10	54	41	33	28	53	40	33	28	39	32	27		38	32	27		37

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2999	2999	2999
5°	3011	2968	2985
10°	2993	2937	2952
15°	2956	2899	2896
20°	2903	2842	2839
25°	2851	2772	2772
30°	2784	2708	2684
35°	2722	2630	2591
40°	2643	2552	2504
45°	2566	2476	2415
50°	2481	2396	2311
55°	2394	2303	2218
60°	2295	2192	2111
65°	2191	2082	1986
70°	2058	1948	1856
75°	1872	1794	1750
80°	1661	1611	1527
85°	1356	1293	1159

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2566 cd/sqm

TEST NUMBER: P930579

CATALOG NUMBER: DFN2DS-PN3F0-070DS830-FLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	241.5	3.7
10°-20°	679.5	10.4
20°-30°	998.5	15.3
30°-40°	1159.7	17.8
40°-50°	1158.3	17.7
50°-60°	1010.0	15.5
60°-70°	746.6	11.4
70°-80°	422.4	6.5
80°-90°	111.5	1.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1919.5	29.4
0°-40°	3079.2	47.2
0°-60°	5247.5	80.4
0°-90°	6528.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6528.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2566	2566	2566	2566	2566	
5°	2566	2556	2529	2548	2544	244
15°	2442	2428	2396	2406	2393	688
25°	2211	2191	2149	2154	2149	1017
35°	1907	1883	1843	1828	1816	1191
45°	1552	1535	1498	1471	1461	1198
55°	1174	1160	1130	1100	1088	1050
65°	792	777	753	730	718	783
75°	414	410	397	382	387	442
85°	101	99	96	89	86	119
90°	0	0	0	0	0	

TEST NUMBER: P930579

CATALOG NUMBER: DFN2DS-PN3F0-070DS830-FLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2565.7	2565.7	2565.7	2565.7	2565.7
2.5°	2580.7	2568.4	2541.1	2565.7	2561.0
5°	2565.7	2556.1	2528.9	2548.5	2543.8
7.5°	2548.5	2533.8	2506.6	2526.5	2521.5
10°	2521.5	2504.2	2474.6	2494.3	2487.0
12.5°	2484.3	2469.7	2440.2	2452.4	2447.4
15°	2442.5	2427.8	2395.6	2405.6	2393.2
17.5°	2390.6	2376.0	2343.8	2356.1	2343.8
20°	2333.8	2319.2	2284.6	2292.0	2282.3
22.5°	2277.3	2255.1	2222.8	2222.8	2217.8
25°	2210.6	2190.9	2149.1	2153.8	2149.1
27.5°	2136.5	2119.2	2087.3	2079.9	2067.6
30°	2062.7	2042.7	2005.9	1998.5	1988.6
32.5°	1983.6	1969.0	1929.4	1914.5	1904.5
35°	1907.2	1882.6	1843.0	1828.1	1815.8
37.5°	1820.8	1798.6	1759.0	1741.8	1729.4
40°	1732.1	1712.2	1672.6	1650.7	1640.7
42.5°	1645.7	1625.8	1586.5	1561.6	1547.0
45°	1551.9	1534.7	1497.5	1470.6	1460.6
47.5°	1460.6	1443.3	1403.8	1376.5	1361.9
50°	1364.3	1352.0	1317.4	1282.9	1270.6
52.5°	1270.6	1253.3	1221.4	1194.2	1176.8
55°	1174.5	1159.6	1130.0	1100.4	1088.1
57.5°	1078.2	1065.9	1033.7	1004.1	994.2
60°	981.8	972.1	937.7	910.4	903.1
62.5°	888.1	870.9	846.3	821.7	811.7
65°	792.1	777.2	752.6	730.3	718.0
67.5°	693.4	680.9	658.8	641.6	631.6
70°	602.0	592.1	569.8	552.6	542.9
72.5°	508.3	498.4	486.1	468.8	461.5
75°	414.4	409.7	397.1	382.5	387.4
77.5°	330.6	320.7	315.7	308.3	301.1
80°	246.8	244.3	239.3	231.9	226.9
82.5°	167.8	167.8	165.4	155.5	155.5
85°	101.1	98.7	96.4	88.7	86.4
87.5°	44.5	39.6	34.6	27.2	24.6
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P930579

CATALOG NUMBER: DFN2DS-PN3F0-070DS830-FLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.10	16.71	15.46	17.02	17.34	14.65	16.27	15.02	16.58	16.89
	3H	16.85	18.30	17.23	18.63	18.99	16.36	17.81	16.73	18.14	18.50
	4H	17.50	18.86	17.89	19.21	19.59	17.00	18.37	17.40	18.72	19.09
	6H	17.96	19.23	18.38	19.60	19.99	17.46	18.73	17.87	19.10	19.49
	8H	18.11	19.32	18.53	19.71	20.11	17.60	18.82	18.03	19.20	19.60
	12H	18.20	19.36	18.63	19.74	20.17	17.69	18.85	18.12	19.23	19.66
4H	2H	15.66	17.03	16.06	17.38	17.75	15.31	16.68	15.70	17.02	17.40
	3H	17.63	18.78	18.04	19.18	19.58	17.23	18.37	17.64	18.77	19.17
	4H	18.41	19.45	18.84	19.86	20.30	17.99	19.02	18.42	19.44	19.87
	6H	19.01	19.91	19.46	20.35	20.81	18.58	19.48	19.03	19.92	20.38
	8H	19.20	20.04	19.66	20.49	20.95	18.76	19.61	19.22	20.05	20.51
	12H	19.33	20.09	19.81	20.56	21.03	18.88	19.64	19.36	20.11	20.58
8H	4H	18.68	19.53	19.14	19.97	20.44	18.31	19.16	18.77	19.60	20.06
	6H	19.40	20.10	19.89	20.59	21.07	19.02	19.72	19.51	20.21	20.68
	8H	19.66	20.29	20.17	20.80	21.28	19.27	19.90	19.78	20.40	20.89
	12H	19.86	20.42	20.36	20.91	21.47	19.44	20.00	19.95	20.49	21.05
12H	4H	18.71	19.47	19.19	19.95	20.42	18.35	19.11	18.83	19.58	20.05
	6H	19.44	20.08	19.95	20.58	21.07	19.08	19.71	19.58	20.21	20.70
	8H	19.76	20.32	20.26	20.81	21.37	19.38	19.94	19.89	20.43	20.99