

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P930532

Luminaire Tested: DFN2DS-PN3F0-040DS850-RLL

Issue Date: 11/20/2024

Test Information

Test Method: LM-79-2019
Report Number: P930532
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P333882)
Test Lab: INNOVATION CENTER
Issue Date: 11/20/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DS-PN3F0-040DS850-RLL
Description: 3 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3770.6 lumens
Efficiency: N/A
Efficacy: 96.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 3.11' x L: 2.96' x H: 0')
CIE Type: Direct

Input Watts (W): 38.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9972
Total Harmonic Distortion (THDi): 0.128
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P930532

CATALOG NUMBER: DFN2DS-PN3F0-040DS850-RLL

Luminous Intensity Polar Plot

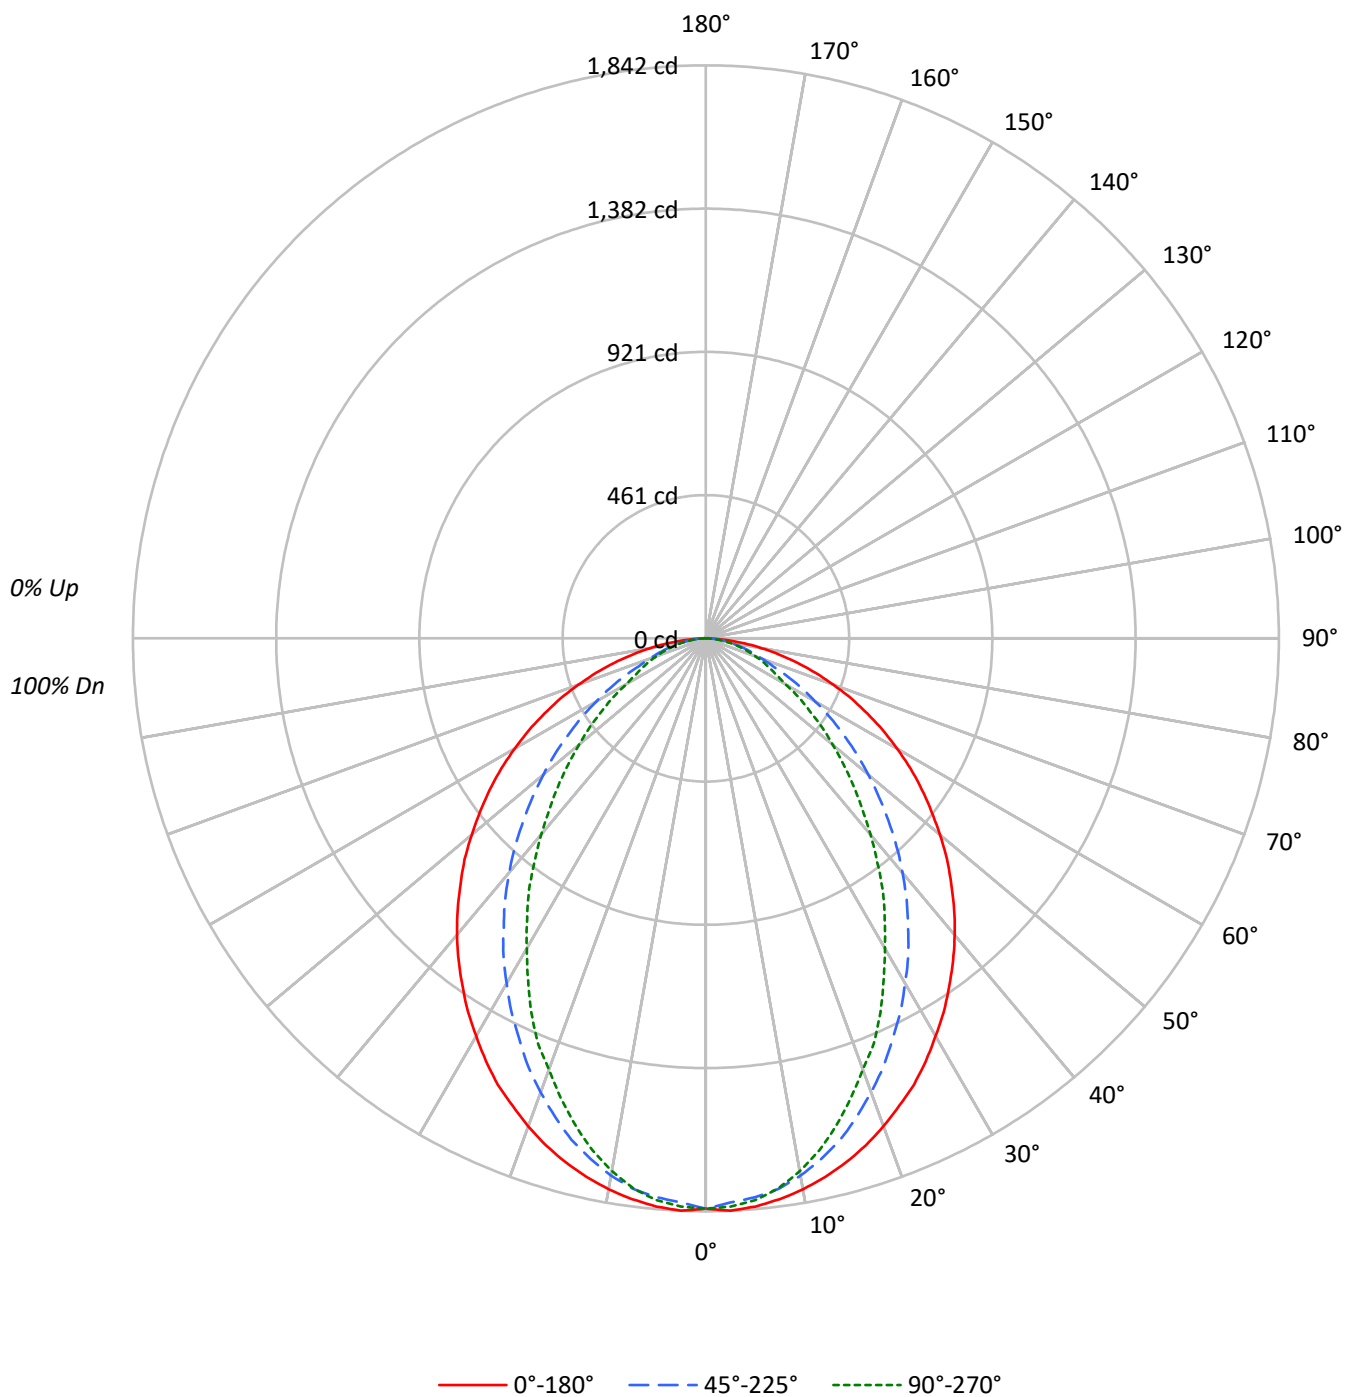

TEST NUMBER: P930532

CATALOG NUMBER: DFN2DS-PN3F0-040DS850-RLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	110	106	102	98	107	103	100	97	99	96	94		95	93	91		92
2	101	94	87	82	98	92	86	81	88	83	79		85	81	78		82
3	93	83	76	70	90	82	75	69	79	73	68		76	71	67		74
4	86	75	66	60	83	73	66	60	71	64	59		69	63	58		66
5	79	67	59	53	77	66	58	52	64	57	52		62	56	51		60
6	74	61	53	47	72	60	52	46	58	51	46		57	50	46		55
7	68	56	47	42	67	55	47	42	53	46	41		52	46	41		51
8	64	51	43	38	62	51	43	37	49	42	37		48	42	37		47
9	60	47	39	34	59	47	39	34	46	39	34		44	38	34		44
10	56	44	36	31	55	43	36	31	42	36	31		41	35	31		41

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2143	2143	2143
5°	2151	2116	2128
10°	2135	2082	2064
15°	2110	2020	1962
20°	2076	1932	1835
25°	2042	1832	1712
30°	1993	1729	1554
35°	1947	1617	1416
40°	1899	1501	1256
45°	1843	1371	1111
50°	1786	1240	969
55°	1728	1099	832
60°	1660	950	691
65°	1584	799	628
70°	1492	658	578
75°	1378	599	540
80°	1217	535	492
85°	956	422	422

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1843 cd/sqm

TEST NUMBER: P930532

CATALOG NUMBER: DFN2DS-PN3F0-040DS850-RLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	171.8	4.6
10°-20°	471.7	12.5
20°-30°	662.3	17.6
30°-40°	721.9	19.1
40°-50°	663.5	17.6
50°-60°	521.1	13.8
60°-70°	339.2	9.0
70°-80°	174.6	4.6
80°-90°	44.6	1.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1305.8	34.6
0°-40°	2027.7	53.8
0°-60°	3212.2	85.2
0°-90°	3770.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3770.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1833	1833	1833	1833	1833	
5°	1833	1825	1804	1818	1814	174
15°	1744	1726	1669	1638	1621	491
25°	1583	1530	1420	1352	1327	728
35°	1364	1279	1133	1029	992	854
45°	1115	1004	830	712	672	861
55°	848	718	539	440	408	758
65°	572	438	289	232	227	568
75°	305	189	133	121	120	323
85°	71	36	32	32	32	86
90°	0	0	0	0	0	

TEST NUMBER: P930532

CATALOG NUMBER: DFN2DS-PN3F0-040DS850-RLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1833.4	1833.4	1833.4	1833.4	1833.4
2.5°	1841.7	1833.4	1815.1	1831.8	1828.4
5°	1833.4	1825.1	1803.5	1818.4	1813.5
7.5°	1818.4	1808.6	1785.4	1791.8	1783.6
10°	1798.6	1786.9	1753.8	1748.7	1738.9
12.5°	1773.7	1758.8	1713.8	1704.0	1685.7
15°	1743.8	1725.5	1669.2	1637.7	1621.1
17.5°	1709.0	1682.4	1612.6	1576.2	1549.6
20°	1669.2	1635.9	1552.9	1511.6	1475.0
22.5°	1626.0	1587.9	1491.5	1435.2	1410.4
25°	1582.9	1529.8	1420.2	1352.3	1327.3
27.5°	1531.5	1475.0	1353.9	1275.9	1237.6
30°	1476.7	1413.5	1280.8	1196.3	1151.5
32.5°	1423.6	1347.2	1211.2	1111.7	1070.1
35°	1364.0	1279.2	1133.3	1028.7	992.1
37.5°	1305.8	1214.5	1060.2	945.6	904.3
40°	1244.4	1144.9	983.9	866.1	823.0
42.5°	1181.3	1075.2	907.6	784.7	743.4
45°	1115.0	1003.8	829.6	711.8	671.9
47.5°	1052.0	934.2	755.0	637.1	600.6
50°	982.2	864.5	681.9	567.4	532.7
52.5°	914.1	789.7	612.3	502.7	471.2
55°	847.8	718.4	539.2	439.7	408.2
57.5°	779.8	647.1	474.5	381.6	355.1
60°	710.1	577.3	406.4	321.9	295.4
62.5°	642.2	509.5	348.3	268.8	255.6
65°	572.5	437.9	288.7	232.3	227.2
67.5°	506.1	371.6	232.3	204.1	199.1
70°	436.4	307.0	192.4	175.9	169.1
72.5°	370.1	247.2	160.9	147.7	144.4
75°	305.2	189.1	132.7	121.1	119.6
77.5°	240.7	134.3	104.6	97.9	94.5
80°	180.8	96.3	79.5	73.1	73.1
82.5°	126.1	64.8	54.8	51.3	51.3
85°	71.3	36.5	31.5	31.5	31.5
87.5°	26.6	13.2	13.2	11.6	11.6
90°	0.0	0.0	0.0	0.0	0.0

TEST NUMBER: P930532

CATALOG NUMBER: DFN2DS-PN3F0-040DS850-RLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.88	15.40	14.25	15.72	16.03	9.84	11.36	10.21	11.68	11.99
	3H	15.65	17.01	16.03	17.34	17.70	11.11	12.47	11.49	12.80	13.16
	4H	16.31	17.60	16.71	17.94	18.32	11.61	12.89	12.01	13.24	13.62
	6H	16.80	17.99	17.22	18.35	18.75	11.99	13.17	12.40	13.54	13.93
	8H	16.97	18.10	17.40	18.49	18.89	12.12	13.24	12.54	13.63	14.03
	12H	17.07	18.15	17.50	18.53	18.96	12.20	13.28	12.63	13.66	14.09
4H	2H	13.99	15.27	14.39	15.62	15.99	10.54	11.82	10.94	12.17	12.55
	3H	15.92	16.98	16.33	17.38	17.78	11.98	13.05	12.39	13.44	13.85
	4H	16.67	17.63	17.10	18.04	18.48	12.58	13.54	13.01	13.95	14.39
	6H	17.26	18.09	17.72	18.54	19.00	13.07	13.90	13.53	14.35	14.80
	8H	17.48	18.25	17.94	18.70	19.17	13.23	14.01	13.70	14.45	14.92
	12H	17.63	18.32	18.11	18.80	19.27	13.35	14.04	13.83	14.52	14.99
8H	4H	16.69	17.47	17.16	17.92	18.38	12.94	13.71	13.40	14.16	14.62
	6H	17.33	17.97	17.83	18.47	18.94	13.52	14.17	14.02	14.66	15.13
	8H	17.58	18.16	18.10	18.67	19.16	13.74	14.32	14.26	14.83	15.32
	12H	17.79	18.30	18.30	18.79	19.35	13.92	14.43	14.43	14.92	15.49
12H	4H	16.68	17.37	17.16	17.85	18.32	12.98	13.67	13.46	14.15	14.62
	6H	17.31	17.89	17.83	18.40	18.89	13.59	14.16	14.10	14.67	15.16
	8H	17.60	18.11	18.11	18.60	19.16	13.86	14.37	14.37	14.86	15.43